


Beach Changes at Holden Beach, North Carolina, 1970-74

by
Martin C. Miller



MISCELLANEOUS REPORT NO. 83-5

MARCH 1983

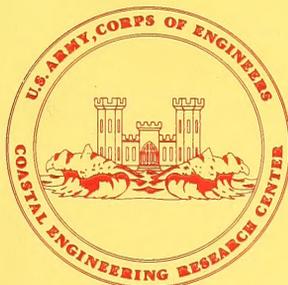

Approved for public release;
distribution unlimited.

Prepared for
**U.S. ARMY, CORPS OF ENGINEERS
COASTAL ENGINEERING
RESEARCH CENTER**

Kingman Building
Fort Belvoir, Va. 22060

TC
203
10581
MR 83-5

Reprint or republication of any of this material shall give appropriate credit to the U.S. Army Coastal Engineering Research Center.

Limited free distribution within the United States of single copies of this publication has been made by this Center. Additional copies are available from:

*National Technical Information Service
ATTN: Operations Division*

Co
adve
Cita
endo
prod

North

Research Ctr

RETURNED

be used for
al purposes.
an official
h commercial

as
so

e construed
tion unless



enhanced by artificial nourishment at profile line 2. Temporary, low-cost shore protection devices (e.g., sandbag groins) were constructed near that inlet during part of the study. No other modifications or activities that affected beach processes were known to occur during the study period.

The central part of Holden Beach was studied separately because of the high variability of the inlet sections at either end of the island. Fore-shore slopes along this reach increased from an average of 1:30 at the east end to 1:17 at the west. A seasonal change in above MSL volume indicates loss of sand during autumn and winter, and a gain during spring and summer. Changes in MSL shoreline intercept and above MSL volume were highly variable during the study. Regression analysis and total annual rates of change indicate that the MSL shoreline is advancing while above MSL volume is decreasing. The net sand loss along the central reach was met or exceeded by gains along the inlet reaches. Wind data showed that strong winds occurred less frequently than normal during the study, and few major storms had an impact on the beach. Erosion events correlated with high water levels and strong onshore winds (near 10 meters per second) while accretion events correlated with gentle, onshore winds for several days before the survey. Visual wave data indicated that westward littoral transport predominated two to three times the eastward transport. The extreme variability of the inlet sections in comparison to the central section emphasizes the need for a different sampling approach to understand these disparate environments.

PREFACE

This report is one of a series describing the results of the U.S. Army Coastal Engineering Research Center's (CERC) Beach Evaluation Program. One aspect of the program, and the subject of this report, is to provide basic engineering information on changes in the volume of sand on beaches above mean sea level, and on changes in shoreline position, as obtained from long-term beach survey projects. The work was carried out under the Beach Profiles Studies work unit, Beach Protection and Restoration Program, Coastal Engineering Area of the Corps of Engineers Research and Development.

The report was prepared by Dr. Martin C. Miller, Science Applications, Inc. (SAI), Raleigh, North Carolina, under CERC contract No. DACW72-79-C-0020. Beach profile surveys were performed by the W.W. Blanchard Company, Wallace, North Carolina, under contract to the U.S. Army Engineer District, Wilmington. Visual wave data were contributed by J.M. Clarke and E.D. Gray. M.V. Fleming, T.J. Lawler, J. Buchanan, and B.R. Sims developed the CERC computer programs used for editing, analyzing, and displaying the beach profile data. J.L. Miller, J.A. Tarnowski, and K.P. Zirkle (CERC) assisted in data reduction. Eigenfunction analysis programs were written by D.G. Aubrey, Woods Hole Oceanographic Institution, Woods Hole, Massachusetts. The author acknowledges and appreciates the helpful review comments from D.G. Aubrey, A.E. DeWall, and B.R. Hall (CERC), and J.T. Jarrett, U.S. Army Engineer District, Wilmington.

A.E. DeWall was the contract monitor, under the general supervision of R.M. Sorenson, former Chief, Coastal Processes and Structures Branch, and Mr. R.P. Savage, Chief, Research Division, CERC.

Technical Director of CERC was Dr. Robert W. Whalin, P.E.

Comments on this report are invited.

Approved for publication in accordance with Public Law 166, 79th Congress, approved 31 July 1945, as supplemented by Public Law 172, 88th Congress, approved 7 November 1963.



TED E. BISHOP
Colonel, Corps of Engineers
Commander and Director

CONTENTS

	Page
CONVERSION FACTORS, U.S. CUSTOMARY TO METRIC	7
I INTRODUCTION	9
1. Background.	9
2. Previous Work	9
II THE STUDY AREA	11
1. Geography and Geomorphology	11
2. Littoral Processes.	18
III METHODS.	22
Profile Lines and Monumentation.	22
IV RESULTS.	28
1. Temporal Variability.	28
2. Spatial Variability	46
V DISCUSSION	53
1. Profile Changes	53
2. Civil Engineering Implications.	55
VI SUMMARY.	56
LITERATURE CITED	57
APPENDIX	
A PROFILE LINE DOCUMENTATION AND PHOTOS.	61
B BEACH PROFILE DATA	104
C CHANGE IN MSL SHORELINE POSITION	159
D CHANGE IN ABOVE MSL UNIT VOLUME.	171
E PROFILE ENVELOPES.	183

TABLES

1 Relative longshore energy flux by month from visual wave observations .	23
2 Summary of profile lines and surveys.	24
3 Regression coefficients for changes in MSL intercept and above MSL sand volume.	31
4 Change in above MSL sand volume averaged over each reach between the dates indicated.	33
5 Change in position of MSL intercept (m) averaged over each reach between the dates indicated.	34

CONTENTS

TABLES--Continued

	Page
6 Dredging record at Lockwoods Folly Inlet during BEP study.	38
7 North Carolina coastal storms, 1970-74	39
8 Visual wave observations of erosion and accretion events at Holden Beach during BEP study	42

FIGURES

1 Profile line locations along Holden Beach, Brunswick County, North Carolina.	10
2 Aerial photo mosaic of Holden Beach, August 1971	12
3 Changes in Lockwoods Folly Inlet, 1959-72.	15
4 Aerial photos of Lockwoods Folly Inlet, 1938-72.	16
5 Aerial photos of Shallotte Inlet, 1938-72.	17
6 Comparison of wind speed and direction observed during BEP study with the long-term average at Wilmington, North Carolina.	19
7 Recording periods of CERC wave gage on Holden Beach fishing pier near profile line 10.	20
8 Monthly average significant wave height and period	20
9 Monthly average significant wave heights measured at Wrightsville Beach and Holden Beach, North Carolina, and off Savannah, Georgia . .	21
10 Frequency distribution of profile line surveys by year and season. . .	26
11 Frequency distribution of profile line surveys by month and season . .	26
12 Definition of MSL shoreline change and above MSL unit volume change. .	27
13 Cumulative change in high water line position east of profile line 4 .	30
14 Comparison of cumulative change in position of high water line and dune line west of profile line 4 from aerial photo analysis	30
15 Displacement distance and standard deviation of annual mean, MSL intercept from long-term mean (Nov. 1970-Dec. 1974), MSL intercept at each profile line (1971-74).	35
16 Seasonal changes in above MSL volume averaged over the central reach .	36
17 Seasonal trend in selected beach profiles.	37

CONTENTS

FIGURES--Continued

	Page
18 Wind velocity recorded at Wilmington, North Carolina, between 30 September-3 December 1974.	41
19 Wind velocity and water level during erosion event recorded at Wilmington, North Carolina, 14 January-8 February 1971	42
20 Wind velocity and water level recorded at Wilmington, North Carolina, 29 September-11 December 1972	43
21 Wind velocity and water level recorded at Wilmington, North Carolina, 28 March-13 April 1973	44
22 Wind velocity and water level recorded at Wilmington, North Carolina, 9-25 June 1972.	45
23 Wind velocity and water level recorded at Wilmington, North Carolina, 12 November-14 December 1970.	45
24 Wind velocity and water level recorded at Wilmington, North Carolina, 13 April-14 June 1973	47
25 Wind velocity and water level recorded at Wilmington, North Carolina, 13 April-9 June 1972.	48
26 Wind velocity and water level recorded at Wilmington, North Carolina, 5 August-29 September 1972.	49
27 Wind velocity and water level recorded at Wilmington, North Carolina, 14 June-12 July 1973.	50
28 Change in MSL intercept along Holden Beach on successive survey dates.	51
29 Beach foreshore slope averaged over the study period	52

CONVERSION FACTORS, U.S. CUSTOMARY TO METRIC (SI) UNITS OF MEASUREMENT

U.S. customary units of measurement used in this report can be converted to metric (SI) units as follows:

Multiply	by	To obtain
inches	25.4	millimeters
	2.54	centimeters
square inches	6.452	square centimeters
cubic inches	16.39	cubic centimeters
feet	30.48	centimeters
	0.3048	meters
square feet	0.0929	square meters
cubic feet	0.0283	cubic meters
yards	0.9144	meters
square yards	0.836	square meters
cubic yards	0.7646	cubic meters
miles	1.6093	kilometers
square miles	259.0	hectares
knots	1.852	kilometers per hour
acres	0.4047	hectares
foot-pounds	1.3558	newton meters
millibars	1.0197×10^{-3}	kilograms per square centimeter
ounces	28.35	grams
pounds	453.6	grams
	0.4536	kilograms
ton, long	1.0160	metric tons
ton, short	0.9072	metric tons
degrees (angle)	0.01745	radians
Fahrenheit degrees	5/9	Celsius degrees or Kelvins ¹

¹To obtain Celsius (C) temperature readings from Fahrenheit (F) readings, use formula: $C = (5/9) (F - 32)$.

To obtain Kelvin (K) readings, use formula: $K = (5/9) (F - 32) + 273.15$.

BEACH CHANGES AT HOLDEN BEACH, NORTH CAROLINA, 1970-74

by
Martin C. Miller

I. INTRODUCTION

1. Background.

This report is one of a series which analyzes and interprets beach profile data collected along several east coast beaches during the period 1962-75. Beach profile data from 21 profile lines on the oceanside of Holden Beach, North Carolina (Fig. 1) were collected from November 1970 to December 1974 by the U.S. Army Engineer District, Wilmington, as part of the U.S. Army Coastal Engineering Research Center's (CERC) Beach Evaluation Program (BEP) (formerly known as the Pilot Program for Improving Coastal Storm Warnings or the Storm Warning Program). The BEP was initiated after the Great East Coast Storm of March 1962 to observe variations on typical beaches in response to waves and tides of specific intensity and duration. Twelve beaches in the region hardest hit by the storm (Massachusetts to North Carolina) are under study in this program.

This report presents an analysis and interpretation of data collected at Holden Beach, documents the locations of the profile lines, and evaluates the relationship of changes in the beach elevation, sand volume, and shoreline position to changes in waves, water level, sediment size and supply, storm events, and coastal structures. The analysis includes a review of previous studies of the area to determine the relevant long-term trends in waves, winds, tides, and inlet processes.

Variability in the shape of the beach profile was analyzed using the empirical eigenfunction technique as well as by other standard methods performed by CERC. Changes were evaluated on three time scales: (a) short-term changes caused by individual storms or events occurring between surveys; (b) seasonal changes observed over the typical 3-month season; and (c) long-term changes that occur on time scales of 1-year or more.

2. Previous Work.

There have been few detailed studies which provide insight into processes along the barrier islands of southern North Carolina; none has concentrated on Holden Beach. The most comprehensive study was developed for Yaupon and Long Beaches to the immediate east of Holden Beach by the U.S. Army Engineer District, Wilmington (1973). The study also provides information on processes active at Lockwoods Folly Inlet, as well as along the eastern end of Holden Beach, and summarizes wave, wind, and other general climate data. Langfelder, Stafford, and Amein (1968) and Wahls (1973) used aerial photography to determine the erosion rates of North Carolina's barrier islands. The results of the former study were reviewed in U.S. Army Engineer District, Wilmington (1973) and will be referred to later in this report. Langfelder, et al. (1974) and Baker (1977) used successive aerial photos to compare changes occurring in the coastal inlets at either end of Holden Beach from 1938 to 1976. Machemehl, Chambers, and Bird (1977) combined aerial photo analysis and information from coastal survey maps to

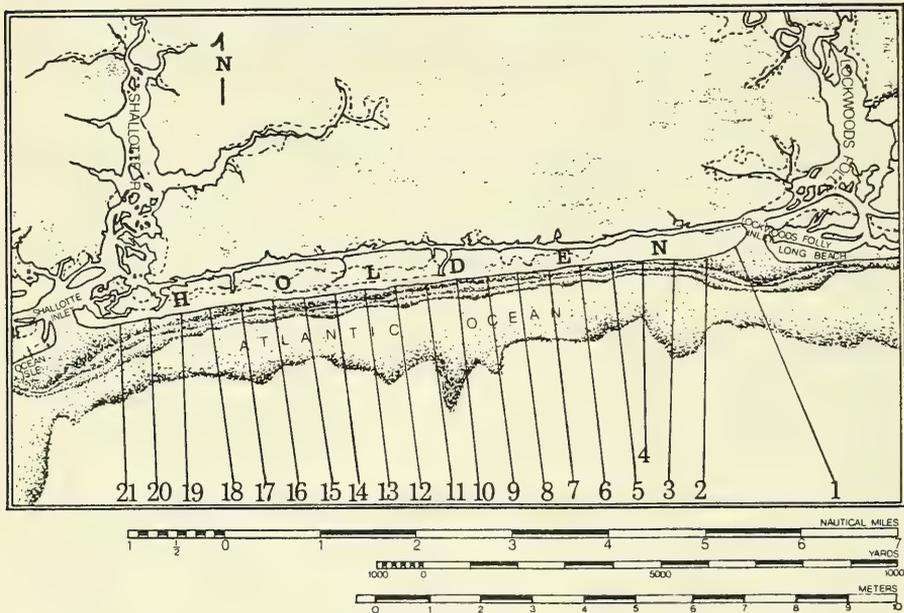
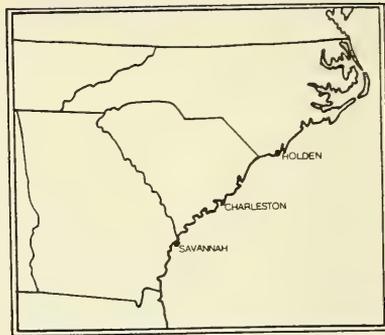
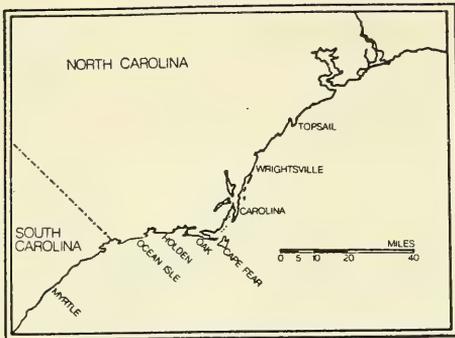


Figure 1. Profile line locations along Holden Beach, Brunswick County, North Carolina.

extend the history of inlet change to 1859. They also developed a model of tidal flow and water level change for Lockwoods Folly Inlet.

This report concentrates on the analysis and interpretation of the Holden Beach data collected during the BEP study and relates the beach changes to the environmental factors of waves, winds, and water levels that occurred during that period. Aspects of these previous studies which relate to beach processes during the period are used to provide additional insights.

II. THE STUDY AREA

1. Geography and Geomorphology.

a. Geomorphic Setting. The shoreline of Holden Beach, a barrier island located on the Atlantic Ocean along the southern coast of North Carolina about 30 kilometers west of Cape Fear (Fig. 1), is oriented almost exactly east-west. Separated from the mainland by salt marsh and the Atlantic Intracoastal Waterway (AIWW), the island is terminated at the east and west ends by Lockwoods Folly and Shallotte Inlets, respectively, each associated with a river of the same name. Sediment contribution from these slowly flowing coastal streams is negligible. Both are unstructured, active tidal inlets with migrating channels. The main, natural tidal channel for each inlet curves east and flows in a southeasterly direction adjacent to the shoreline east of each inlet. Lockwoods Folly Inlet and the AIWW in its general vicinity are dredged by the Corps of Engineers, and an artificially developed entrance channel has been cut in a north-south direction through the Lockwoods Folly sandbar. Sand from the maintenance dredging operations is beach sand, transported into the inlet by littoral currents and tides and is disposed of on the east end of Holden Beach, near profile lines 1 and 2, to supplement the existing beach.

Holden Beach is one of a chain of 17 barrier islands along the 237-kilometer coastline of the Atlantic Ocean between Cape Lookout and the southern North Carolina border. The island, characterized as having a low mesotidal shoreline (Hayes, 1979), has a mean tidal range of 1.35 meters. There is only one shore protection structure on the 13.2-kilometer-long beach--a short (about 24 meters) wooden bulkhead near profile line 4. Comparison of profile line measurements taken nearest the fishing pier east of profile line 10 with others along the beach indicates that the pilings and open truss works of the pier do not restrict littoral transport.

A massive dune ridge at the eastern end of the island is heavily vegetated and extends west about one-fourth of the island's length (Cleary and Hosier, 1979) (Fig. 2); the central reach is narrower and backed by a single, low dune ridge. Finger canals have been dredged on the north side of the central reach to extend waterfront property, with access to the AIWW, for housing construction. The dredged material was used as fill before this construction. The eastern end of the island has experienced washovers and changes in inlet formation during severe storms. West of the finger canals, the final length of the island broadens and is composed of massive vegetated dunes and single or multiple dune ridges. Those adjacent to the inlets are probably associated with inlet migration, while those more inland are shaped

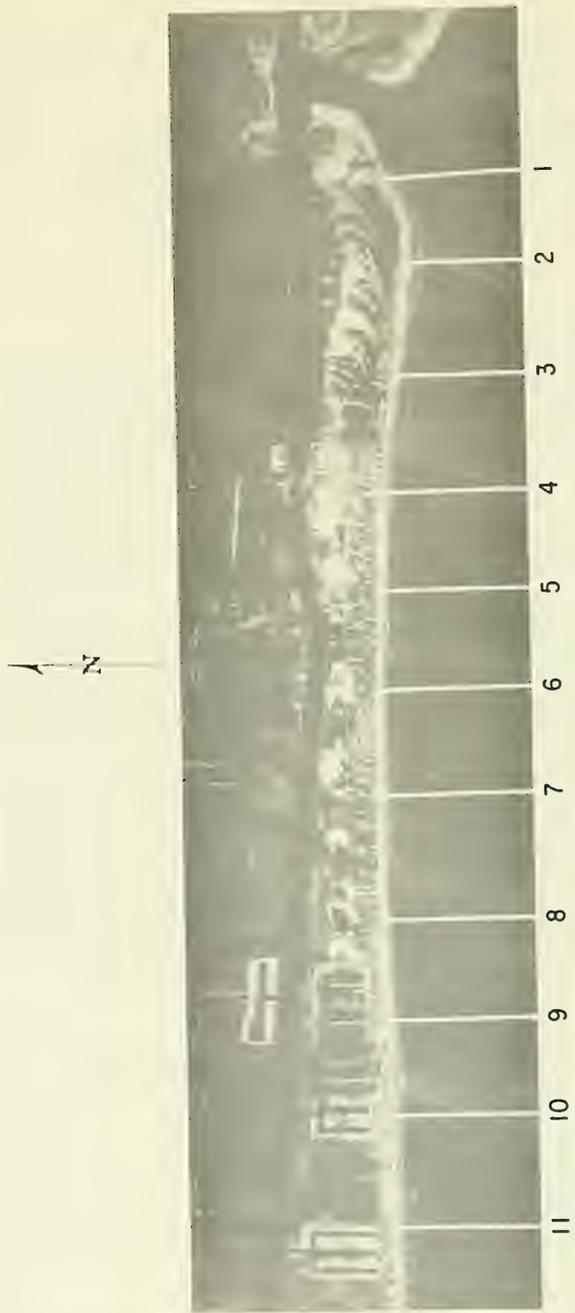


Figure 2. Aerial photo mosaic of Holden Beach (eastern half), August 1971.

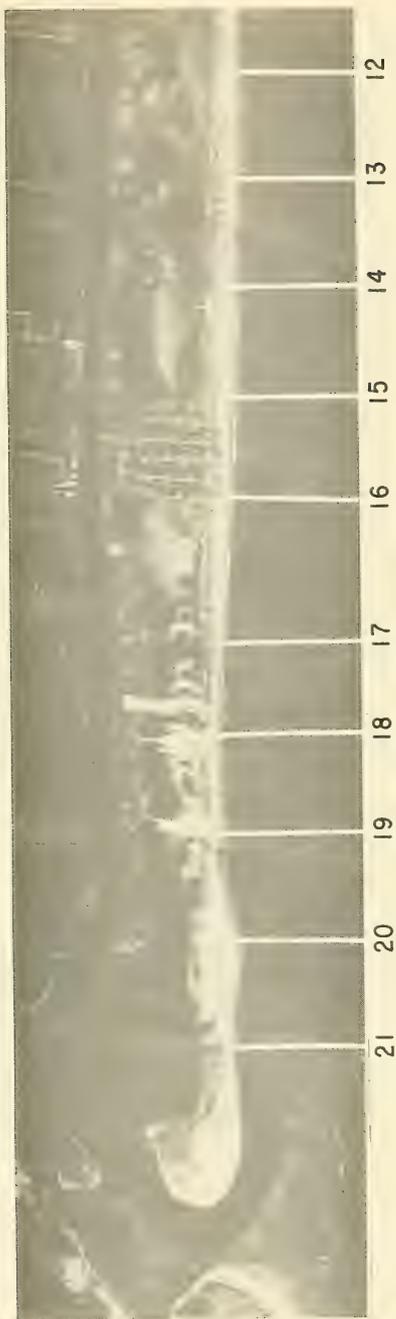



Figure 2. Aerial photo mosaic of Holden Beach (western half), August 1971.--
Continued

and migrate under the influence of wind action (Dr. W. Cleary, University of North Carolina at Wilmington, personal communication, 1981). The width of the dunes varies, averaging 250 meters from the ocean to the AIWW with heights from 2.5 to 5 meters (Boc and Langfelder, 1977). Beach material is composed of clean, medium sand, moderately to moderately well sorted (U.S. Army Engineer District, Wilmington, 1973).

b. Inlet History. Early maps and historical records dating to the 1850's of the Holden Beach area show at least two other inlets between Lockwoods Folly and Shallotte Inlets. Mary's Inlet, which cuts northeast through the island, was located about 5.8 kilometers west of Lockwoods Folly near profile line 9 (Fig. 2). Bacon's Inlet was located between profile lines 15 and 16 (Fig. 2). U.S. Coast and Geodetic Survey coastal charts prepared in 1923 show both inlets open. Bacon's Inlet was closed by 1933, and some time between then and 1938, aerial photos indicated Mary's Inlet was closed. Neither has reopened (U.S. Army Engineer District, Wilmington, 1973).

Hurricane Hazel in November 1954 was particularly devastating for the North Carolina coast. This storm caused two breakthroughs on Holden Beach—one near the site of the old Mary's Inlet, the other near the west end of the island. Both had filled by natural means by 1959. Some washovers occurred during intense storms in the late 1950's and early 1960's; however, 1974 aerial photos indicate Holden Beach was relatively stable during several preceding years. The central part of the island, which is lowest and narrowest, is highly susceptible to washover or breakthrough, while the risk is considered moderate to none along the massive dunes at the eastern and western ends (Pilkey, Neal, and Pilkey, 1978; Cleary and Hosier, 1979). The Great East Coast Storm of March 1962 had no particular effect on Holden Beach. The center of that storm was located considerably north of Holden Beach, off the coast of New Jersey, and the orientation of the island protected it from the large storm-generated waves arriving from the north and northeast.

Shallotte and Lockwoods Folly Inlets have remained open but have shown considerable variability through the years. In 1859, Lockwoods Folly was located about 600 meters east of its present location (Fig. 3). Though the shorelines of the ends of Holden Beach and Long Beach on the other side of Lockwoods Folly Inlet have varied, as shown in Figure 3, the inlet position has remained fairly constant since 1923. Aerial photos from 1938 to 1972 show the inlet gorge extending southward from the AIWW and curving sharply eastward along the shore of Long Beach (Fig. 4) (Langfelder, et al., 1974; Baker, 1977; Machemehl, Chambers, and Bird, 1977). The exit channel, presently maintained by the Corps of Engineers, is a southern extension of the natural channel through the existing bar. The shape of the bar indicates predominantly eastward littoral transport (Langfelder, et al., 1974; Machemehl, Chambers, and Bird, 1977).

The shape of Shallotte Inlet, as seen in successive aerial photos (Fig. 5), has varied more than Lockwoods Folly. The 1938 photo shows the inlet gorge oriented southwest; however, over the years a reorientation of the inlet discharge is shown toward the southeast along the western tip of Holden Beach. With the exception of dredging for the AIWW, which began before 1938, there has been no maintenance dredging in the inlet. This reorientation is probably associated with the AIWW and the increase in tidal flushing caused by the dredging of the channel behind the adjacent islands.

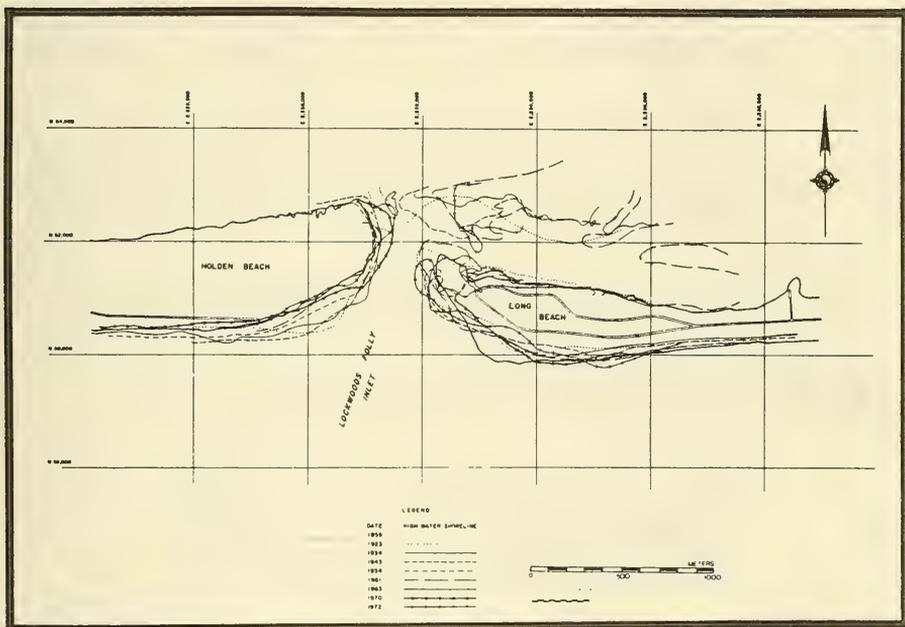


Figure 3. Changes in Lockwoods Folly Inlet, 1859-1972. Grid lines are the North Carolina coordinate system in feet (U.S. Army Engineer District, Wilmington, 1973).

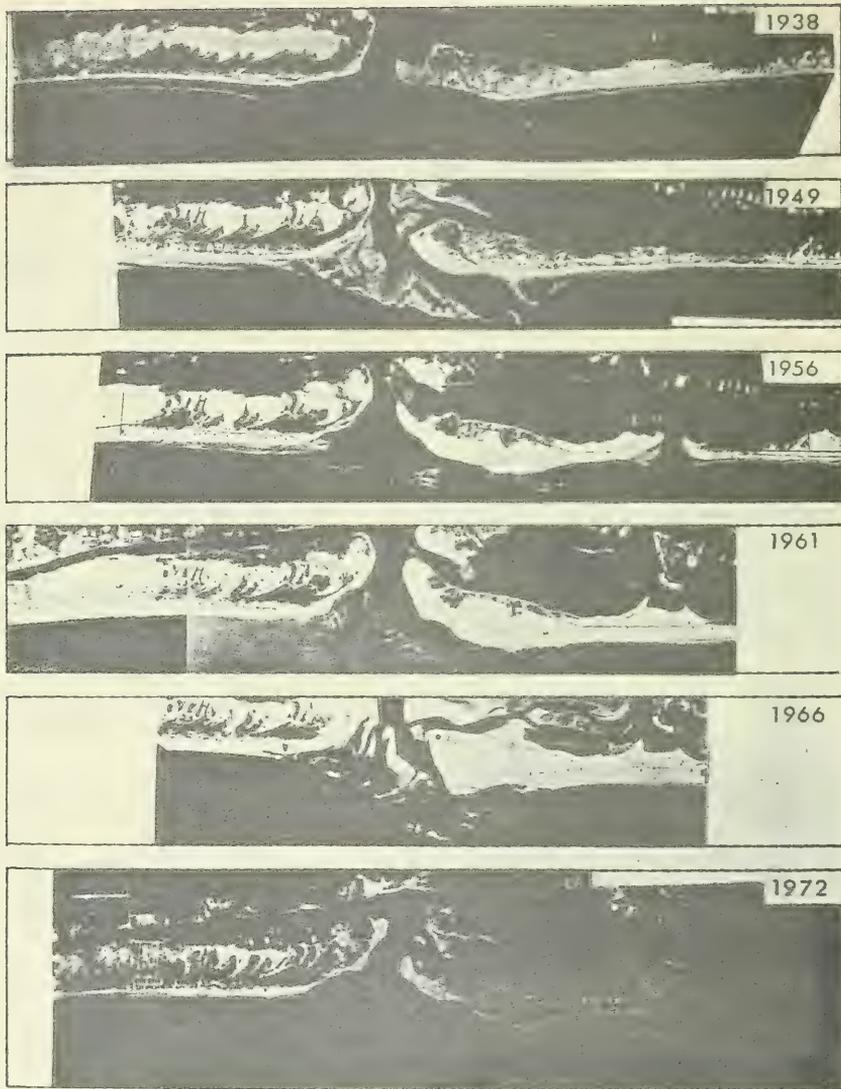


Figure 4. Aerial photos of Lockwoods Folly Inlet, 1938-72 (Langfelder, et al., 1974).



Figure 5. Aerial photos of Shallotte Inlet, 1938-72 (Langfelder, et al., 1974).

2. Littoral Processes.

a. Wind Speed and Direction. Figure 6 compares the long-term average wind speed and direction at Wilmington, North Carolina, 56 kilometers north-east of Holden Beach, from 1948 to 1960 (U.S. Army Engineer District, Wilmington, 1973), with the wind speed and direction during the study period (1970-74). The predominant winds, both in terms of duration and speed, occur from the southwest direction. Winds from the southwest were more persistent than normal and, in all cases, were more moderate than normal. There were no significant storms during the study period. Winds from the south and southwest predominate during the spring and summer months; north and north-east winds occur during the winter. All sections of Holden Beach are vulnerable to hurricane winds from the south and east (Carney and Hardy, 1967).

b. Wave Climate. A continuous-wire staff wave gage, installed on the fishing pier at Holden Beach in February 1971, recorded wave height and period for 1,024-second intervals every 4 hours through February 1975, as shown in Figure 7 (Thompson, 1977). Figure 8 shows monthly averages of significant wave heights and periods from April 1971 to December 1974 and the composite mean for the entire period; the vertical lines represent the standard deviation. Periods of calm, according to visual observations over the same period, comprised fewer than 1 percent of the readings. The highest average waves were observed in June, though this may be an anomalous month since only 1972 was recorded. Mean wave heights were greater than 60 centimeters from February through August with the least mean height recorded in October. Mean wave periods for the interval were 7.38 seconds with longest periods in September and November and shortest during April, June, and July. The general wave height at Holden Beach is less severe than recorded by CERC wave gages to the north at Wrightsville Beach and south at Savannah, Georgia (Fig. 9). Holden Beach, exposed to the south, is protected from severe northeast storms and large, long-period ocean waves approaching from the east. Wrightsville Beach and Savannah are fully exposed to these waves (Fig. 1).

U.S. Army Engineer District, Wilmington (1973) considered the direction and rate of littoral transport along the east end of Holden Beach and other beaches (Long Beach and Yaupon Beach) immediately to the east. Although several sources of wave data were evaluated, transport rates and directions were determined using computer-generated wave refraction data for selected combinations of wave heights, periods, and angles of approach. The Wilmington District concluded that the dominant direction of transport is west to east, and that the magnitude of the easterly component ranges is 2.5 to 3.5 times the westerly component.

Littoral Environment Observations (LEO) of breaker height, period, and angle to the shoreline at Holden Beach were recorded by a trained observer. These observations were made by the same person at the same general location along the beach (i.e., near profile line 16) throughout most of the study period. Before 1974, breaker angle was recorded as approaching from a sector rather than from a discrete direction (Everts, DeWall, and Czerniak, 1980). These data, which were later converted to the LEO format, assigned sectors 2, 3, and 4 corresponding to 72°, 90°, and 108° clockwise from the

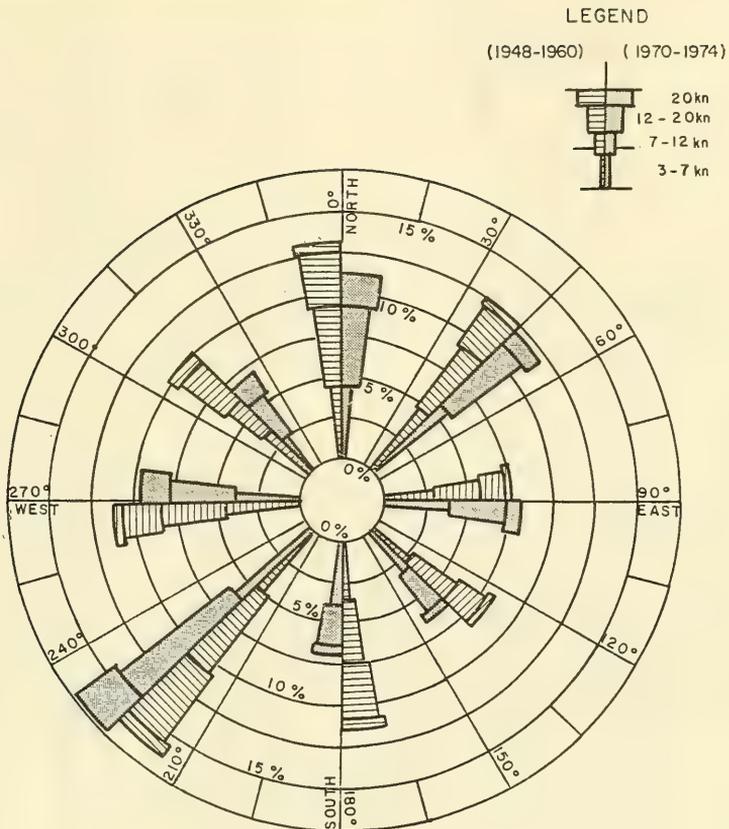


Figure 6. Comparison of wind speed and direction observed during BEP study (1970-74 inclusive) with the long-term average (1948-60) at Wilmington, North Carolina (U.S. Army Engineer District, Wilmington, 1973).

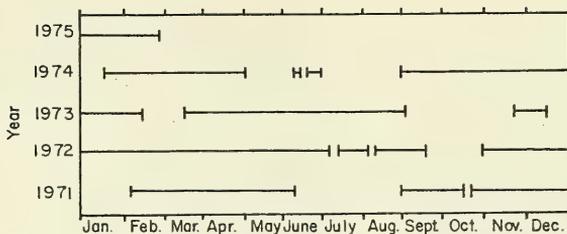


Figure 7. Recording periods of CERC wave gage on Holden Beach fishing pier near profile line 10.

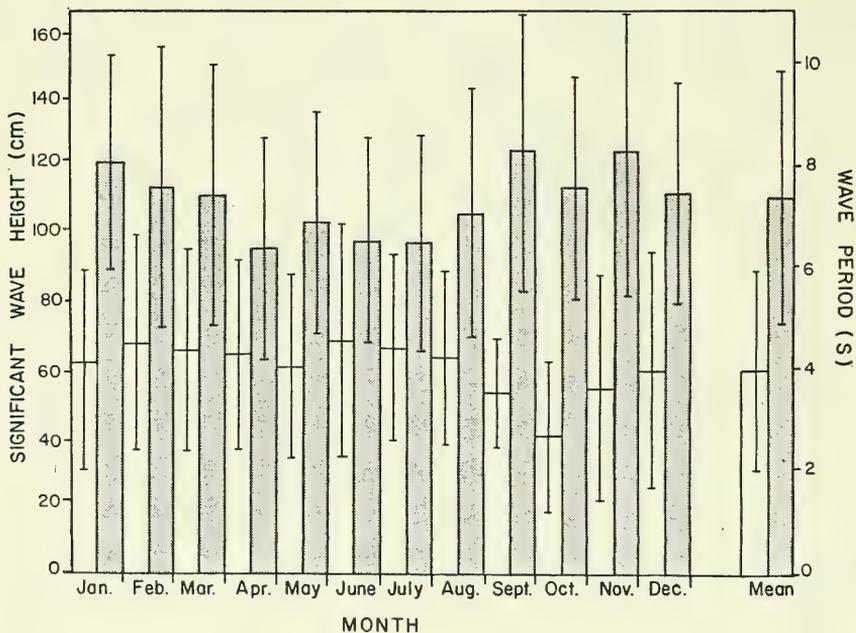


Figure 8. Monthly average significant wave height (left) and period (right, shaded). Vertical lines are one standard deviation above and below mean.

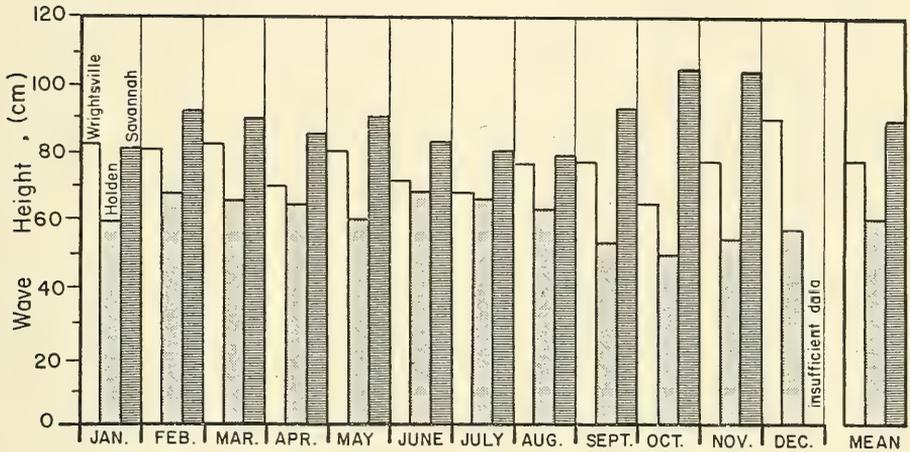


Figure 9. Monthly average significant wave heights measured at Wrightsville Beach and Holden Beach, North Carolina, and off Savannah, Georgia (Thompson, 1977).

shoreline with 0° to the left. Observations taken after 1974 corresponded to the LEO methodology (Szuwalski, 1970; Bruno and Hiipakka, 1974; Balsillie, 1975). At 90° waves approaching from directly offshore would result in no net longshore sand transport. Along Holden Beach, angles less than 90° are from the east and greater than 90° from the west, producing transport westward and eastward, respectively.

The frequency of breaker approach indicates that net transport westward predominates. Table 1 provides the relative magnitude of littoral transport calculated for each month from 1971 to 1973. These values were determined from the longshore energy flux relationship (U.S. Army, Corps of Engineers, Coastal Engineering Research Center, 1977) and can be shown to be proportional to wave height to the $5/2$ power ($H^{5/2}$). The breaker angle was included only in the 1974 calculations, so the 1971-73 values and 1974 values should not be compared. The computed parameters do not represent actual transport rates, but provide relative rates and directions for each month. The estimates show that net longshore sand transport is actually westward. The table also shows that wave approach is predominantly from the east. There were several cases, however, where waves from one direction were completely overpowered by large breakers from the opposite direction. These are footnoted in Table 1.

III. METHODS

Profile Lines and Monumentation.

Twenty-one profile lines extending from Lockwoods Folly Inlet to Shallotte Inlet were surveyed along Holden Beach. The location and spacing of the profile lines are shown in Figure 2. Except for a series of sandbag groins installed near the east end of the island between profile lines 1 and 3 during 1973-74, there were no erosion control structures placed along the beach during the study period. Bulkheads in varying states of repair were present along the beach at profile lines 2, 3, and 4. Their effectiveness was not specifically monitored during the study. The survey periods and number of surveys per profile line are given in Table 2.

a. Survey Procedures. The profile lines were relatively evenly spaced along Holden Beach with distances varying from a minimum of 565.1 to 638.1 meters. The horizontal and vertical datums for each profile line were established by the firm of Moorman and Little, Inc., Fayetteville, North Carolina, for the Wilmington District. Actual profile line measurements were taken by the firm of W. W. Blanchard, Inc., Wallace, North Carolina. Monuments consisted of capped, galvanized pipes embedded in the dune or backshore area with reference ties measured to local cultural features where possible with third-order survey control providing the geodetic and state-plane coordinates of the monument. Vertical control at each profile line consisted of a third-order elevation of the top of the monument with respect to the National Geodetic Vertical Datum of 1929. Documentation of each profile line monument, as well as ground photos of each site, is provided in Appendix A.

Surveying crews measured each profile line, using a level and tape technique, and established a reference elevation at a fixed object such as the top of a log barricade, the foot spike on a telephone pole, or nail markers driven into the roadway. The survey proceeded seaward, approximately perpendicular to the shoreline, from the reference along the preselected azimuth,

Table 1. Relative longshore energy flux (proportional to $H^{5/2}$) by month from visual wave observations.

Year	Month	No. of observations				Flux toward		Net	Pct of month observed
		Onshore	Calm	Approach from		West (right)	East (left)		
				72° (left)	108° (right)				
1971	Jan.	6	0	0	6	0	-12.50	-12.50	38.7
	Feb.	1	0	3	2	4.76	-2.0	2.76	21.4
	Mar.	21	0	3	7	.53	-10.88	-10.35	100.
	Apr.	15	0	4	4	7.83	-16.39	-8.56	76.7
	May ¹	9	0	4	3	10.41	-18.52	-8.11	51.6
	June ¹	17	1	6	3	17.83	-21.13	-13.30	90.0
	July ¹	16	0	4	3	8.44	-18.30	-9.85	74.3
	Aug.	10	0	14	1	37.68	-5.66	32.02	80.6
	Sept.	11	0	15	1	25.86	-1.00	24.86	90.0
	Oct.	17	0	10	1	64.77	-22.92	41.86	90.3
	Nov.	12	0	7	0	11.77	0	11.77	63.3
	Dec.	22	0	7	0	33.91	0	33.91	93.5
1972	Jan.	21	0	7	1	12.59	-5.66	6.93	93.5
	Feb.	13	0	10	4	40.59	-26.90	13.69	93.1
	Mar.	19	0	10	2	42.45	-8.41	34.04	100.
	Apr.	14	0	12	4	42.20	-31.08	11.12	100.
	May	13	0	8	2	44.20	-3.76	40.44	74.2
	June	18	0	5	4	37.76	-25.00	12.75	90.0
	July	19	1	6	0	19.54	0	19.54	83.9
	Aug.	14	0	13	0	36.96	0	36.96	87.1
	Sept.	8	0	5	0	39.54	0	39.54	43.3
	Oct.	6	0	13	1	37.50	-1.00	36.50	64.5
	Nov. ¹	13	2	6	1	14.17	-15.59	-1.42	73.3
	Dec.	12	0	5	2	27.76	-2.00	25.76	61.3
1973	Jan.	16	0	8	1	33.43	-9.88	23.55	80.6
	Feb.	11	0	5	0	42.03	0	42.03	57.1
	Mar. ¹	16	0	5	2	11.41	-47.59	-36.18	74.2
	Apr. ¹	21	0	5	2	5.93	-15.54	-9.61	93.3
	May	25	0	1	2	5.66	-34.76	-29.10	90.3
	June	20	1	9	0	50.45	0	50.45	100.
	July ¹	13	2	11	3	32.71	-35.56	-2.85	93.5
	Aug.	6	0	4	0	16.83	0	16.83	33.3
	Sept. ²								
	Oct.	11	1	12	1	138.77	-5.66	133.11	80.6
	Nov.	19	0	1	1	5.66	-32.00	-26.34	70.0
	Dec.	9	0	5	1	102.00	-9.80	92.11	48.4
1974	July	7	0	11	6	40.47	-30.34	10.13	77.4
	Aug.	7	0	13	5	32.49	-16.03	16.47	80.6
	Sept.	5	0	6	0	29.41	0	29.41	36.7

¹Case where waves from one direction were completely overpowered by large breakers from the opposite direction.

²No observations.

Table 2. Summary of profile lines and surveys.

Profile line	Distance to next monument (m)	Azimuth of profile line ($^{\circ}$ T)	Elevation of monument 1929 MSL datum (m)	Survey period		Total surveys
				First reading	Last reading	
1	602.3	157 $^{\circ}$ 34'N	3.54	12 Nov. 70	3 Dec. 74	39
2	609.6	181 $^{\circ}$ 24'N	2.86	12 Nov. 70	3 Dec. 74	39
3	631.1	181 $^{\circ}$ 24'N	2.65	12 Nov. 70	3 Dec. 74	39
4	590.2	179 $^{\circ}$ 40'N	3.12	13 Nov. 70	3 Dec. 74	39
5	610.1	174 $^{\circ}$ 16'N	2.89	13 Nov. 70	3 Dec. 74	39
6	605.0	174 $^{\circ}$ 16'N	2.54	13 Nov. 70	3 Dec. 74	39
7	628.4	174 $^{\circ}$ 16'N	2.38	13 Nov. 70	3 Dec. 74	39
8	595.6	173 $^{\circ}$ 33'N	2.04	13 Nov. 70	4 Dec. 74	39
9	604.9	173 $^{\circ}$ 33'N	2.12	13 Nov. 70	4 Dec. 74	39
10	623.9	174 $^{\circ}$ 03'N	2.18	13 Nov. 70	4 Dec. 74	39
11	594.1	173 $^{\circ}$ 06'N	2.24	13 Nov. 70	4 Dec. 74	39
12	612.0	173 $^{\circ}$ 06'N	2.73	16 Nov. 70	4 Dec. 74	39
13	608.4	173 $^{\circ}$ 06'N	2.17	16 Nov. 70	4 Dec. 74	39
14	605.1	173 $^{\circ}$ 06'N	2.04	16 Nov. 70	4 Dec. 74	39
15	613.0	171 $^{\circ}$ 32'N	2.15	16 Nov. 70	4 Dec. 74	39
16	638.1	172 $^{\circ}$ 23'N	2.33	16 Nov. 70	4 Dec. 74	39
17	625.4	172 $^{\circ}$ 23'N	2.57	16 Nov. 70	5 Dec. 74	39
18	565.1	172 $^{\circ}$ 42'N	2.68	16 Nov. 70	5 Dec. 74	39
19	609.6	178 $^{\circ}$ 22'N	3.12	18 Nov. 70	5 Dec. 74	39
20	624.4	178 $^{\circ}$ 22'N	1.76	18 Nov. 70	5 Dec. 74	39
21		178 $^{\circ}$ 22'N	3.16	18 Nov. 70	5 Dec. 74	39

maintained by alinement of two separated, fixed objects. Readings were taken every 15 meters or at each break in the beach slope, then continued to -0.6 meter MSL by a rodman. Surveys were timed to coincide with low tide to extend to that depth. Occasionally, however, extreme water levels or surf conditions prohibited seaward extension of the profiles. Readings were taken to the nearest 1.0 foot (0.3 meter) horizontally and 0.1 foot (0.03 meter) vertically. Occasionally it was necessary to move the level, so care was taken to document the elevation and new location.

b. Survey Frequency. The distributions of the profile line measurements by year and season and by month and season are shown in Figures 10 and 11, respectively. Each season is represented by at least one survey with autumn and winter being the seasons of the least and most surveys, respectively.

Survey data were recorded in field notebooks. Range and elevation were computed by the note man in the field and then doublechecked by another member of the survey team. The detailed procedures for transcribing coding forms for computer processing are given in DeWall (1979, p. 15). All data were meticulously hand checked, and spurious points were either corrected or discarded. Profile data are shown in tabulated form in Appendix B.

c. Profile Analysis. Surveys of profile lines were analyzed by CERC and computer plots were generated for (1) change in MSL shoreline intercept (App. C), (2) above MSL change in unit volume between surveys (App. D), and (3) profile envelopes (App. E). Changes in the MSL intercept position were referred to the MSL position on the first survey of the study. Volume changes were referred to the mean above MSL volume over the study period. The distance-elevation coordinates of the MSL contour intercept with the initial survey on each profile line are defined as the origin of a coordinate system to which all subsequent surveys are referred. Negative distances indicate stations landward of the MSL intercept with the initial profile; positive distances indicate seaward stations.

The cross-sectional area of each profile was computed and bounded by three coordinate lines: (1) a vertical line projected from the landwardmost distance common to all surveys on a given profile line, (2) a horizontal line at the MSL elevation, and (3) the surveyed profile. The calculation was accomplished by summing 30.0-centimeter horizontal slices through the area from the highest elevation to MSL. The area change was then computed by subtracting the previous profile area from the measured profile area (Fig. 12). Note that the change in area (and volume) is referred to the previous survey and not the original survey. Cross-sectional areas were computed in square feet and then converted to unit volume in cubic meters per meter of shoreline.

Appendix E provides a profile envelope for each profile line. Each plot shows two lines drawn through the upper and lower extremes of the surveyed sand elevations on each profile line. The envelope of extremes contains points from different surveys, rather than trace a particular eroded or accreted profile found during one survey. This profile "sweep zone" is useful for designing the required depth of footings for coastal structures, burial depth for pipelines, and for other beach protection or improvement considerations.

The temporal and spatial variability of each profile was also evaluated using empirical eigenfunction analysis. This technique has been used in a

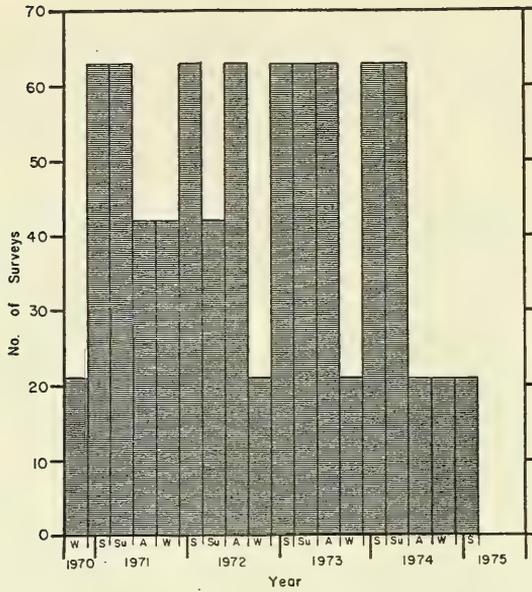


Figure 10. Frequency distribution of profile line surveys by year and season.

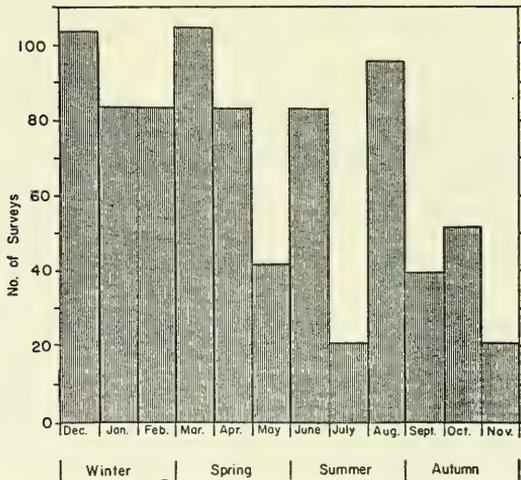


Figure 11. Frequency distribution of profile line surveys by month and season.

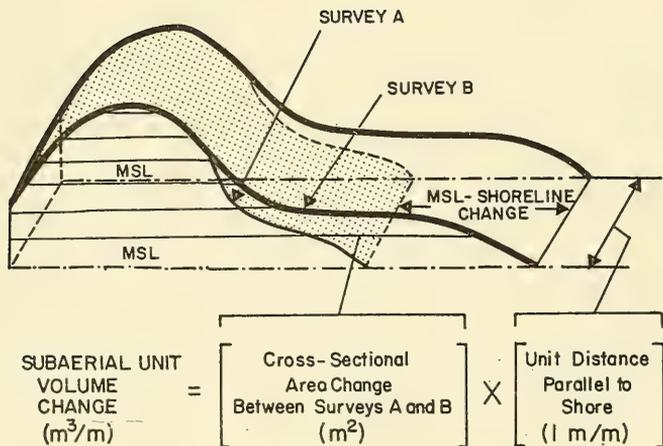


Figure 12. Definition of MSL shoreline change and above MSL unit volume change (from DeWall, 1979).

variety of scientific disciplines for many years (Lorenz, 1959), but it has only recently been applied to examining variability within the coastal zone. When applied to analysis of a profile line resurveyed over a period of time, the method is useful in determining the topographic variability in the onshore-offshore direction and in time. A comparison of the eigenfunctions of a series of profiles is useful in determining the longshore variability. The technique has been applied to studies on beaches, islands, and other coastal and bathymetric features on both the Atlantic and Pacific coasts (Winant, Inman, and Nordstrom, 1975; Vincent, et al., 1976; Resio, et al., 1977; Aubrey, 1979).

The objective of eigenfunction analysis is to separate the temporal and spatial dependence of the data set so that it can be represented as a linear combination of corresponding functions of time and space (Winant, Inman, and Nordstrom, 1975). This helps identify processes responsible for profile line changes, assists in evaluation of their relative importance, and aids the identification of specific events.

The shape of a single profile line changes between measurements in response to the many processes (e.g., waves, wind, water level, etc.) active on the beach. A careful evaluation of the profile line measured frequently over time may reveal systematic changes in its shape. Regular seasonal changes in profile area, for instance, were obvious on west coast beaches before being quantitatively confirmed by empirical eigenfunction analysis (Shepard, 1963; Aubrey, 1979). Along a single profile line, zones of maximum variation are to be expected in the region of maximum wave energy dissipation. This has also been confirmed by empirical eigenfunctions on west coast beaches (Aubrey, 1979). However, the technique does not explain the physical reason for the variability. In the case of beach profiles, the sand is moved in response to wave forcing in a manner which is assumed to be deterministic, or at least statistically predictable. It is hoped that since the wave forcing provides most of the variability, the eigenfunctions will reflect this mechanism. By examining the temporal structure of the beach eigenfunctions along with spatial structure, the decision can be made as to whether, in fact, the eigenfunctions represent some physically meaningful process. This has been shown to be the case in nearshore profile studies (Aubrey, 1979).

Profiles obtained during the BEP do not extend beyond about the -0.61-meter MSL shoreline. For that reason, beach variability associated with sediment motion and seasonal sand storage in the offshore zone, below MSL, are not included in the study and impose a limitation in the method of analysis. It is known that the breaker zone and nearshore are regions of active transport both onshore-offshore and alongshore. Offshore bars act as periodic storage areas for sand that is later supplied to the beach under favorable wave conditions. The time periods and detailed response of these regions cannot be determined from the available data.

IV. RESULTS

1. Temporal Variability.

a. Long-Term Changes. The long-term erosion rates along Holden Beach have been studied by several investigators who compared the shoreline positions on historical maps and sequences of aerial photos. The net erosion along the east end of the island (beginning between profile lines 3 and 4)

from 1932 to 1970 is shown in Figure 13. This is the highest rate of erosion in Brunswick County, averaging about 4.5 meters per year from 1943 to 1970. Erosion rates over the rest of the island have been quite variable in time (Fig. 14). The shoreline of the eastern reach exhibited a recession rate of about 0.71 meter per year from 1942 to 1970. Langfelder, Stafford, and Amein (1968) and Langfelder, et al. (1974) used aerial photos to determine the recession of the high water line as well as the dune line. The erosion rate of both lines has been nearly the same since 1957 and approximately parallels the slope of the recession determined by U.S. Army Engineer District, Wilmington (1973). All three studies indicate a marked change in the rate of erosion after the early 1960's. The positive slope of the high water line during the latter years of the study indicate a seaward growth of 0.66 meter per year (broken line, Langfelder, et al., 1974) and 0.30 meter per year (solid line). A more recent study (Wahls, 1973) estimated the composite erosion rate (from Shallotte Inlet to Lockwoods Folly Inlet) of the dunes and shoreline as 0.6 and 1.5 meters per year from 1938 to 1972. The interval from 1966 to 1972, however, shows accretion of the dune and shoreline at annual rates of 1.71 and 0.15 meter per year, respectively.

The long-term erosion rate determined by aerial photo analysis of the southern North Carolina shoreline is presently being studied. Specific methods and expected reliability of the estimates obtained by the analysis are explained in Dolan, et al. (1979, 1980).

The erosion rate during the BEP study period was estimated from measured changes in above MSL volume and MSL shoreline position. Holden Beach was divided into three reaches, each similar in response to processes and in the degree of variability shown by the plots of volume and MSL intercept change (Apps. C and D, respectively). The three reaches are Lockwoods Folly (profile lines 1, 2, and 3), central (profile lines 4 to 18), and Shallotte (profile lines 19, 20, and 21).

Plots of the change in MSL intercept and above MSL sand volume with each successive measurement (Apps. C and D) give a qualitative indication of the temporal variability of each profile line. Superposition of plots shows many instances during which changes are of opposite sign, even at adjacent profile lines, suggesting that spatial variability is also quite large. Linear regression analysis was used to evaluate the trends in shoreline position and volume with slopes for each profile line given in Table 3. Though a trend could be established in each case, the coefficient of determination

$$R^2 = \frac{SS_R}{SS_T} = \frac{\text{sum of squares due to regression}}{\text{total sum of squares (corrected for mean)}}$$

was significant at the 95-percent level in only six of the profile lines along the central reach, indicated in Table 3. The proportion of total variation about the mean explained by linear regression is not significant at the 95-percent confidence level for the remaining profile lines.

The annual rates of change predicted by the regression lines of MSL position and unit volume are generally more extreme near the inlets than along the central reach. Since profile lines are almost evenly spaced along the beach, changes may be estimated by averaging the parameter of interest along the selected reach. The generalizations developed by this method should be applied

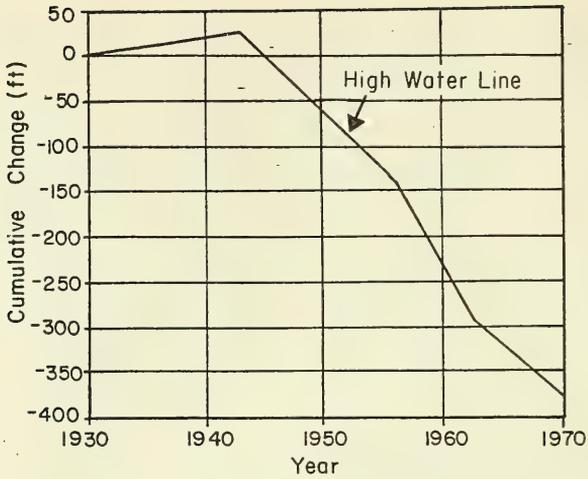


Figure 13. Cumulative change in high water line position east of profile line 4 (U.S. Army Engineer District, Wilmington, 1973).

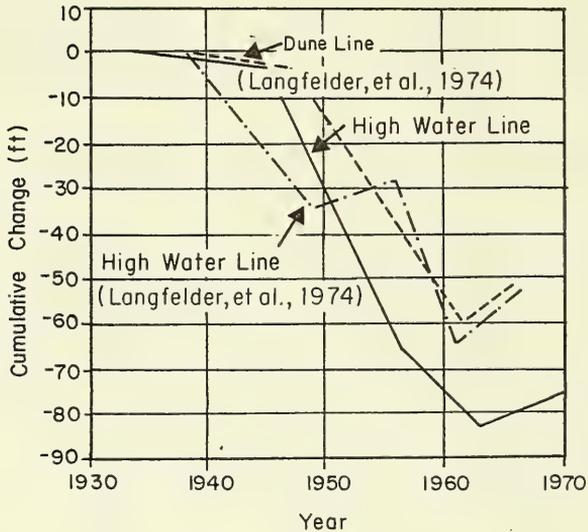


Figure 14. Comparison of cumulative change in position of high water line and dune line west of profile line 4 from aerial photo analysis (U.S. Army Engineer District, Wilmington, 1973). Solid line from Corps of Engineers study.

Table 3. Linear regression coefficients for changes in MSL intercept and above MSL sand volume (from Apps. C and D, respectively).

Reach and profile line No.	Shoreline position slope (m/yr)	Coefficient of determination (R ²)	Unit volume change slope (m ³ /m/yr)	Coefficient of determination (R ²)	Mean MSL position slope (m/yr)	Mean unit volume change (m ³ /m/yr)
Lockwoods Folly						
1	-5.29	0.22 (2)	-3.59	0.21 (2)		
2	9.12	0.46 (2)	20.18	0.39 (2)	3.71	9.32
3	7.30	0.65	13.32	0.70		
Central						
4	2.29	0.13 (1)	2.67	0.22 (2)		
5	1.20	0.04	0.08	-0-		
6	0.79	0.02 (1)	1.83	0.12 (2)		
7	1.86	0.14	3.00	0.21 (2)		
8	-0.85	0.04	-2.68	0.11 (1)		
9	0.38	-0-	-0.60	0.02		
10	1.72	0.14 (1)	-0.69	0.01		
11	1.38	0.07	0.54	0.01	1.18	-0.44
12	1.42	0.08	0.38	-0-		
13	1.18	0.05 (1)	-0.28	-0-		
14	2.11	0.15 (1)	0.77	0.02		
15	1.67	0.13 (1)	-1.29	0.05		
16	2.45	0.22 (2)	0.79	0.01 (2)		
17	0.80	0.07	-4.03	0.25 (2)		
18	-0.74	0.06	-6.99	0.52		
Shallotte						
19	7.93	0.74 (2)	12.87	0.72 (2)		
20	-4.04	0.04 (2)	-7.93	0.07 (2)	5.25	11.53
21	11.87	0.75	30.11	0.88		

¹Significant at 95 percent confidence level.

²Significant at 99 percent confidence level.

only to the central reach, since bars and shoals develop near the inlets and beach nourishment operations greatly complicate the wave and transport regime along those reaches and invalidate the uniformity assumed along the central part of the island. Regression analysis indicates that the MSL shoreline is advancing seaward at slightly greater than 1 meter per year while the above MSL volume is decreasing by nearly 0.5 cubic meter per meter per year. A more thorough sand budget than can be developed from these data would be required to confirm whether the MSL position is growing at the expense of the volume or by addition of sand from a source external from the island. If the former is the case, however, the beach may be getting flatter, a condition that has implications for coastal flooding.

The changes in above MSL volume and in the MSL intercept for each survey period are averaged by reach in Tables 4 and 5. The standard deviation about the mean is also shown to identify periods when erosion or accretion was ubiquitous. The averaging process eliminates the variability between adjacent profile lines which may be caused by measuring across a migrating coastal feature such as a cusp, rip channel, or sandbar. The presence of these can be determined by spacing profile lines more closely than the length scale of the feature itself. The changes in shoreline position and volume were determined on an annual basis by summing the changes for each year. The result is the same as subtracting the shoreline position or volume from its value the previous year. The beginning date of 14 December 1970 and ending date of 3 December 1974 allowed computation of 4 complete years with comparable (within several days) annual intervals. This method yields annual rates of change of +0.15 meter per year and -4.81 cubic meters per meter per year for MSL intercept and volume, respectively. The slope of the first temporal eigenfunction (mean retained) provides another method of determining whether the measured beach profile is gaining or losing volume (Aubrey, 1979). There was no measurable slope in this parameter for any of the profile lines along the central reach indicating that the trend, if any, is not significant over the study period.

The annual spatial variation in the position of the MSL intercept is shown relative to the 4-year mean MSL intercept for that profile line in Figure 15. The horizontal line represents the long-term (Nov. 1970-Dec. 1974) mean position of the MSL intercept measured from the reference monument. The circles are the annual mean, MSL position for each profile line for the year indicated (January to December), and the vertical bar represents one standard deviation in the annual fluctuation. The diagram is arranged from the perspective of an observer at sea looking shoreward. Lockwoods Folly Inlet and profile line 1 are, therefore, to the right. Increases in distance to the MSL shoreline (over the long-term mean) are indicated in the usual sense by the mark above the line. Only the central reach was analyzed in this way because of the extreme variability of the inlet reaches. The sum of the annual means does not exactly equal zero because the long-term mean included profile line measurements taken in November and December 1970. The horizontal line provides a useful reference to compare the annual movement in MSL position. Profile line measurements were evenly distributed during each of the years so no single year biased the long-term mean.

Most of the annual means fall within one standard deviation of the long-term mean. The only exceptions are profile lines 13 (1972) and 4 (1974),

Table 4. Change in above MSL sand volume (m^3/m) averaged over each reach between the dates indicated.

Year	Survey date		Reach					
	Before	After	Lockwoods Folly		Central		Shallotte	
			Mean	Std. dev.	Mean	Std. dev.	Mean	Std. dev.
1970	12 Nov.	14 Dec.	- 2.60	6.38	9.81	4.44	9.07	11.12
	14 Dec.	14 Jan.	- 7.88	11.87	- 2.11	5.62	12.41	9.85
1971	14 Jan.	8 Feb.	6.37	20.77	-11.04	4.30	- 1.89	7.66
	8 Feb.	9 Mar.	23.95	54.83	- 1.31	4.27	4.59	5.73
	9 Mar.	8 Apr.	-13.17	2.73	5.16	7.38	10.17	8.16
	8 Apr.	10 May	- 7.67	7.65	- 0.66	6.90	1.61	4.61
	10 May	7 June	- 0.42	1.50	6.14	5.55	0.43	5.13
	7 June	9 Aug.	2.38	5.95	5.00	4.10	- 2.20	6.75
	9 Aug. ¹	31 Aug.	11.14	10.11	- 2.17	5.41	2.47	10.57
	31 Aug.	6 Oct.	13.18	13.71	- 4.20	7.73	1.24	20.80
	6 Oct.	14 Dec.	1.27	9.46	- 5.09	10.48	-15.58	20.42
	14 Dec.	3 Jan.	- 5.81	1.46	- 4.69	3.07	- 0.31	2.13
	1972	3 Jan.	8 Feb.	4.31	6.71	3.14	3.43	0.83
8 Feb.		20 Mar.	- 2.17	7.51	- 4.21	5.64	34.83	77.26
20 Mar.		13 Apr.	- 5.57	8.06	- 0.11	4.13	-28.50	63.68
13 Apr.		9 June	- 0.24	3.00	8.05	6.60	-11.56	6.43
9 June		25 June	- 8.04	2.78	- 5.29	4.39	- 6.52	6.57
25 June		5 Aug.	-13.16	20.87	6.07	4.45	8.88	13.06
5 Aug. ¹		29 Sept.	22.29	29.30	7.89	5.04	7.64	11.65
25 Sept. ¹		11 Dec.	4.40	18.21	- 8.71	3.52	1.91	4.81
11 Dec.		15 Jan.	10.35	11.13	0.14	3.93	4.75	10.23
1973		15 Jan.	15 Feb.	- 1.28	8.92	- 2.11	2.84	- 6.64
	15 Feb.	15 Mar.	1.80	2.90	1.79	3.72	- 0.87	8.11
	15 Mar.	28 Mar.	- 2.17	4.12	- 2.20	4.44	5.92	8.16
	28 Mar.	13 Apr.	- 2.18	4.00	- 8.15	4.62	2.33	4.82
	13 Apr.	14 June	0.34	10.72	8.91	5.38	2.30	7.02
	14 June	12 July	- 1.67	7.35	7.74	3.55	3.07	8.71
	12 July	9 Aug.	- 6.43	4.82	- 1.79	5.09	3.81	4.08
	9 Aug. ¹	8 Oct.	23.63	8.72	- 1.60	9.37 ²	- 8.78	12.33
	8 Oct.	5 Dec.	4.59	6.98	0.57	6.40 ³	0.86	18.10
	5 Dec.	7 Jan.	- 2.02	3.26	- 3.86	7.95 ⁴	9.21	9.08
	1974	7 Jan.	4 Feb.	0.91	12.11	1.85	6.66	3.26
4 Feb.		4 Mar.	-13.85	1.26	- 5.79	7.37	4.96	1.02
4 Mar.		1 Apr.	10.93	9.58	1.05	3.97	1.74	7.26
1 Apr.		30 May	- 2.01	6.32	4.18	4.83	15.63	1.05
30 May ¹		16 Aug.	38.25	62.01	1.23	5.08	0.69	13.14
16 Aug.		30 Sept.	-19.15	20.49	1.96	2.80	9.29	7.80
30 Sept.		3 Dec.	-14.64	25.23	-15.03	4.25	- 7.40	7.31

¹Beach nourishment at profile line 2 during interval.

²Profile line 11 missing.

³Profile lines 11 and 17 missing.

⁴Profile line 17 missing.

Table 5. Change in position of MSL intercept (m) averaged over each reach between the dates indicated.

Year	Survey date		Reach					
	Before	After	Lockwoods Folly		Central		Shalotte	
			Mean	Std. Dev.	Mean	Std. dev.	Mean	Std. dev.
1970	12 Nov.	14 Dec.	3.13	13.37	1.49	6.25	5.80	12.35
	14 Dec.	14 Jan.	- 6.63	13.37	2.21	2.75	5.80	2.46
1971	14 Jan.	8 Feb.	1.80	21.17	- 7.21	7.56	3.33	7.88
	8 Feb.	9 Mar.	0.43	9.81	0.56	6.66	6.17	7.77
	9 Mar.	8 Apr.	- 3.70	3.60	- 1.15	6.61	0.37	1.45
	8 Apr.	10 May	-19.10	35.51	0.98	6.11	- 4.67	1.93
	10 May	7 June	6.40	1.22	0.75	5.76	- 4.60	5.70
	7 June	9 Aug.	- 2.80	6.85	0.35	4.72	- 1.30	1.18
	9 Aug. ¹	31 Aug.	13.90	16.89	1.47	3.77	2.30	7.82
	31 Aug.	6 Oct.	1.67	21.84	- 0.71	7.21	- 3.50	10.93
	6 Oct.	14 Dec.	- 0.43	2.45	5.01	7.18	- 5.07	17.56
	14 Dec.	3 Jan.	- 2.90	1.41	- 3.07	3.08	- 1.77	0.50
1972	3 Jan.	8 Feb.	0.70	5.12	- 1.76	3.31	- 2.63	8.65
	8 Feb.	20 Mar.	- 1.07	1.59	- 2.52	3.85	8.50	9.19 ²
	20 Mar.	13 Apr.	0.27	5.54	1.67	3.66	10.27	10.28
	13 Apr.	9 June	0.90	4.87	8.99	7.01	- 9.23	9.35
	9 June	25 June	- 4.20	1.93	- 9.29	7.52	0.47	4.55
	25 June	5 Aug.	-10.77	6.73	- 1.43	7.62	- 6.00	1.70
	5 Aug. ¹	29 Sept.	17.27	14.57	7.89	6.55	3.73	9.58
	29 Sept. ¹	11 Dec.	- 0.77	13.52	1.29	3.39	1.57	11.63
	11 Dec.	15 Jan.	- 4.33	0.50	- 0.39	4.51	4.27	5.49
	1973	15 Jan.	15 Feb.	0.67	9.07	0.05	5.90	- 0.60
15 Feb.		15 Mar.	0.67	7.91	0.98	5.28	1.47	11.43
15 Mar.		28 Mar.	- 0.20	4.44	- 5.65	4.62	3.43	4.44
28 Mar.		13 Apr.	0.20	4.97	- 1.27	6.34	- 0.17	4.72
13 Apr.		14 June	- 3.73	6.75	- 0.36	5.71	- 1.80	6.70
14 June		12 July	- 4.23	3.25	1.71	6.48	- 1.30	0.75
12 July		9 Aug.	0.20	7.99	0.90	5.78	- 0.77	1.78
9 Aug. ¹		8 Oct.	11.20	5.37	6.70	5.53 ³	1.90	4.24
8 Oct.		5 Dec.	1.60	1.44	- 4.87	6.66 ⁴	4.77	9.06
5 Dec.		7 Jan.	- 4.77	3.35	- 1.83	4.94	- 0.67	4.48
1974	7 Jan.	4 Feb.	2.23	8.24	2.53	3.33	2.30	5.04
	4 Feb.	4 Mar.	- 5.13	6.54	- 2.49	6.03	1.13	2.16
	4 Mar.	1 Apr.	9.07	5.41	1.07	3.52	- 0.63	3.42
	1 Apr.	30 May	1.23	11.35	6.76	6.25	18.40	19.22
	30 May	16 Aug.	4.90	10.44	- 3.19	6.47	7.03	3.78
	16 Aug.	30 Sept.	- 4.10	5.30	9.10	6.41	9.20	8.69
	30 Sept.	3 Dec.	0.80	0.90	-13.17	7.90	- 6.23	9.62

¹ Beach nourishment at profile line 2 during interval.

² Profile line 21 missing.

³ Profile line 11 missing.

⁴ Profile line 17 missing.

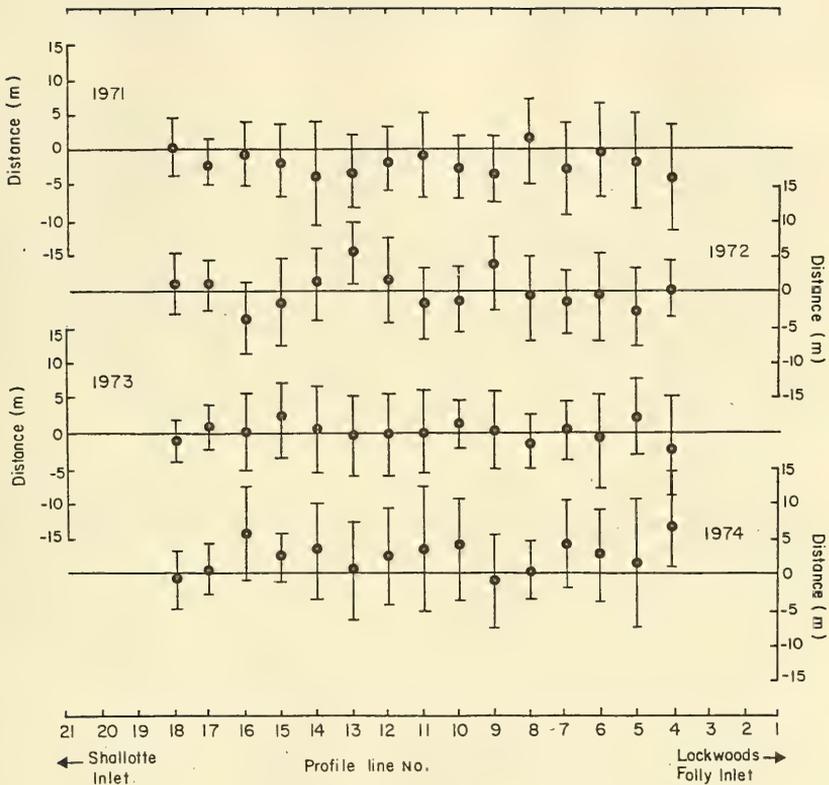


Figure 15. Displacement distance and standard deviation of annual mean, MSL intercept from long-term mean (Nov. 1970-Dec. 1974), MSL intercept at each profile line (1971-74).

both of which show large increases in MSL distance. There is no obvious reason for these radical departures from the long-term mean.

The year 1971 shows a general landward migration of the mean, MSL intercept with increases only at profile lines 8 and 18. During 1972, the mean MSL was more variable, with recession along the eastern half of the island (profile line 9 excepted) and both gains and losses on the western half. The annual mean during 1973 was very near the long-term mean while 1974 shows a marked increase in the MSL shoreline at almost all profile lines.

b. Seasonal Changes. Beaches on the west coast undergo seasonal cycles in response to changing wave and storm conditions with profile shapes characteristic of the summer and winter season. Studies of beach shape have shown that the "winter profile" has almost no berm since steep waves shift the sand offshore to form a series of sandbars parallel to shore. The "summer profile" is characterized by a wide berm and by a smooth offshore profile with no bars except, possibly, in deep water. These seasonal profile shapes are more characteristic of storm and recovery cycles on east coast beaches (Komar, 1976). The length of the Holden Beach profile lines is not sufficient to show offshore sandbars. Seasonal cycles in MSL intercept and above MSL sand volume have been shown on east coast beaches (Goldsmith, Farrell, and Goldsmith, 1974; Everts and Czerniak, 1977; DeWall, Pritchett, and Galvin, 1977; DeWall, 1979; Everts, DeWall, and Czerniak, 1980).

The seasonal cycle is evident in the above MSL sand volume change averaged across the central reach (Fig. 16). The amount of erosion or accretion for each year was obtained by summing the volume change for the dates and years indicated and averaging these seasonal values for profile lines 4 through 18. This analysis shows that sand is removed from the beach, either toward the inlets or to below MSL, during the autumn and winter and replaced during spring and summer. The direction and degree of motion, whether longshore or onshore-offshore, were not determined from these data.

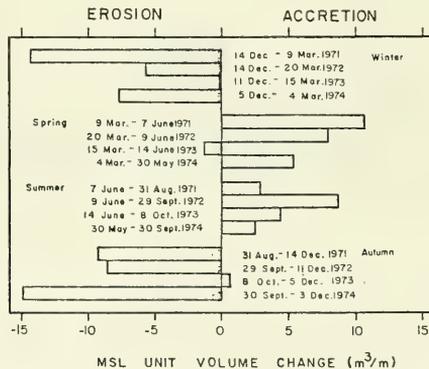


Figure 16. Seasonal changes in above MSL volume averaged over the central reach.

Empirical eigenfunction analysis has been used successfully to show seasonal trends from beach profile data collected at Torrey Pines Beach, California (Aubrey, 1979). A similar analysis applied to the Holden Beach data set indicates a clear seasonal cycle in the first temporal demeaned eigenfunction for only four (profile lines 8, 10, 12, and 16) of the profile lines (Fig. 17).

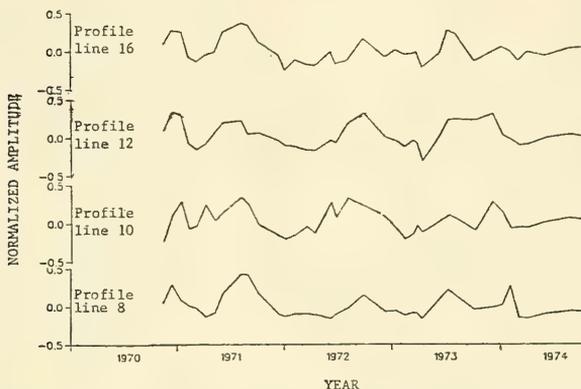


Figure 17. Seasonal trend in selected beach profiles, shown by the first temporal eigenfunction with the mean removed.

c. Short-Term Changes.

(1) Dredging Operations. The Wilmington District has performed maintenance dredging along the Atlantic Intracoastal Waterway (AIWW) for a number of years. Holden Beach residents speculated that continued dredging in the Lockwoods Folly channel exacerbated the already severe erosion problem at that end of the island. They argued that disposal of the material on the mainland shore removed a source of sand which, under certain conditions, protected or even nourished the island beach, so since 1967 the dredged material has been deposited along the east end of Holden Beach. Dredging operations with material being pumped across the island and deposited near profile line 8 are shown in the 1971 aerial photo in Figure 2.

Dredging records are incomplete for the BEP study period. Table 6 provides dredging dates with the available volumes either given or estimated. There were other reported dredging periods when material was not deposited on Holden Beach.

Table 6. Dredging record at Lockwoods Folly Inlet during BEP study.

Year	Dredging period	Volume (m ³)	Annual volume (m ³)
1971	Aug. ¹		82,690
1972	28 Aug.-26 Sept. 28 Nov.-11 Dec.	45,870 21,410 ²	
1973	23 Aug.-5 Sept.	21,410 ²	83,050
1974	6 - 22 June	46,330	41,760 ³ 70,930 ³

¹As shown in August 1971 aerial photo (Fig. 2).

²Estimated, based on dredging rate of 1,530 cubic meters per day.

³Annual volume from two contracts.

The results of the beach fill are evident in the volume and MSL intercept changes observed at profile line 2 (Apps. C and D), and also in the averaged beach changes along the Lockwoods Folly reach (Tables 4 and 5). The effect of the fill appears to be temporary since the mean change in Lockwoods Folly reach is a loss except during nourishment periods.

A series of 16 sandbag groins, placed along the east end of the island in December 1972, were monitored approximately monthly until July 1974, using beach profile measurements and aerial photos (Machemehl, 1977). Evidence indicates the program did little to retard erosion. There was no sign of the groins along the beach in October 1980.

(2) Storms. A tabulation of storms revealed that 71 hurricanes which may have affected the study area occurred along the southern North Carolina coast from 1804 to 1971, an average of 1 hurricane every 2.4 years (U.S. Army Engineer District, Wilmington, 1973). Complete records of coastal impacts do not exist for the earlier storms. Hurricane Hazel, which occurred in October 1954, has been identified as the "most destructive and damaging storm that has struck the North Carolina coast in over 50 years" (U.S Army Engineer District, Wilmington, 1973, p. A-17). The storm made landfall near the North Carolina-South Carolina State line and caused a storm surge of 4.6 meters above MSL or 2.1 meters above the average topographic elevation of the barrier island masses. Damages to Long Beach, Holden Beach, and Ocean Isle Beach were estimated in 1954 at \$8.76 million (U.S. Army Engineer District, Wilmington, 1973).

East coast storms which may have affected the BEP study period are given in Table 7. The wind events were selected from observations at Wilmington, North Carolina (Fig. 1), and represent periods when the recorded velocity was greater than 10 meters per second for 4 consecutive hours. Water level records, available for most of the study period, were also taken at Wilmington. The 27 storms caused a net loss of sand volume over the central reach. It is evident that not all of the storms caused

Table 7. North Carolina coastal storms, 1970-74.

Year	Storm date	Survey dates		Volume change (m ³ /m) and standard deviation by Reach			Information Source ¹	Remarks	
		Before	After	Lockwoods Folly	4-18 Central	19-21 Shallotte			
1970	22 Oct.	15 Oct.	10 Nov.	---	---	---	1		
	26 Oct.	17 Dec.	14 Jan.	-7.88/11.87	-2.11/5.62	12.41/9.85	1		
	31 Dec.	14 Dec.	14 Jan.	-7.88/11.87	-2.11/5.62	12.41/9.85	2		
1971	27 Jan. ³	14 Jan.	8 Feb.	6.37/20.77	-11.04/4.30	-1.89/7.66	5		
	13 Feb.	8 Feb.	9 Mar.	23.95/54.83	-1.31/4.27	4.59/5.73	5		
	4 Mar.	8 Feb.	9 Mar.	23.95/54.83	-1.31/4.27	4.59/5.73	5		
	23 Mar.	9 Mar.	8 Apr.	-13.17/2.73	5.16/7.38	10.17/8.16	1		
	26-28 Mar.	9 Mar.	8 Apr.	-13.17/2.73	5.16/7.38	10.17/8.16	1		
	6-7 Apr.	9 Mar.	8 Apr.	-13.17/2.73	5.16/7.38	10.17/8.16	1	Typical northeaster	
	27-28 Aug.	9 Aug.	31 Aug.	11.14/10.11	-2.11/5.41	2.47/10.57	1,3,4	Tropical Storm Doria	
	13 Sept.	31 Aug.	6 Oct.	13.18/13.71	-4.20/7.73	1.24/20.80	1,4	Tropical Storm Heidi	
	30 Sept.-4 Oct.	31 Aug.	6 Oct.	13.18/13.71	-4.20/7.73	1.24/20.80	1,3,4,5	Hurricane Ginger	
	1972	4 Feb.	3 Jan.	8 Feb.	4.31/6.71	3.14/3.43	0.83/8.85	1	Typical northeaster
19 Feb.		8 Feb.	17 Mar.	-2.17/7.51	-4.21/5.64	34.83/77.26	1,5		
19 Mar.		8 Feb.	17 Mar.	-2.17/7.51	-4.21/5.64	34.83/77.26	1,5		
11-27 May ³		13 Apr.	9 June	-0.24/3.00	8.05/6.60	-11.56/6.43	2		
21 June		9 June	25 June	-8.04/2.78	-5.29/4.39	-6.52/6.57	4	Hurricane Agnes	
9-12 Feb.		15 Jan.	15 Feb.	-1.28/8.92	-2.11/2.84	-6.64/11.13	1,2,5		
16-22 Mar.		15 Mar.	28 Mar.	-2.16/4.12	-2.20/4.44	5.92/8.16	1,2,5		
1973	4 Apr. ³	28 Mar.	13 Apr.	-2.18/4.00	-8.15/4.62	2.33/4.82			
	10 Apr.	28 Mar.	13 Apr.	-2.18/4.00	-8.15/4.62	2.33/4.82			
	27 Apr. ³	13 Apr.	14 June	0.34/10.72	8.91/5.38	2.30/7.02	5		
	28 May ³	13 Apr.	14 June	0.35/10.72	8.91/5.38	2.30/7.02	5		
	26 Oct.	8 Oct.	5 Dec.	4.59/6.98	0.57/6.40	0.86/18.10	1,4		
	22 Feb.	4 Feb.	4 Mar.	-13.85/1.26	-5.79/7.37	4.96/1.02	5		
	30-31 Mar.	4 Mar.	1 Apr.	10.93/9.58	1.05/3.97	1.74/7.26	1		
	1974	22 Feb.	4 Feb.	4 Mar.	-13.85/1.26	-5.79/7.37	4.96/1.02	5	
		30-31 Mar.	4 Mar.	1 Apr.	10.93/9.58	1.05/3.97	1.74/7.26	1	

¹Information sources are: 1, Birkemeir (1979); 2, Baker (1978); 3, U.S. Army Engineer District, Wilmington (1973); 4, Neumann, et al. (1978); 5, National Oceanic and Atmospheric Administration (1971-74).

²Volume change data not available.

³Indicates an erosion or accretion event.

erosion. There was a net gain in sand volume over each of the inlet reaches during these storm periods.

High water levels and wind-generated waves combine to cause beach erosion. Holden Beach, exposed southward and partially protected from the southeast by Frying Pan Shoals, is not affected by northeast storms as much as the other parts of the coast exposed eastward. However, high water levels and strong winds from the southwest-to-southeast direction can be expected to cause erosion.

Ten erosion or accretion events were selected from 14 events identified (6 erosion and 8 accretion) for close study in an attempt to distinguish the conditions which cause erosion from those associated with accretion. The criterion for selection was that the standard deviation of the volume change along the central reach was less than the mean during that interval. Two of each event occurred during identified storm periods (Table 7, footnote 3). The events are presented in order of the greatest net volume loss and gain.

(a) 30 September-3 December 1974. The most severe erosion event of the entire study period was recorded during the last survey of the program. A sand loss was recorded at all profile lines except for profile line 3, with a maximum loss at profile line 2 (-42.7 cubic meters per meter). Maximum and minimum losses in the central reach were -21.42 and -8.03 cubic meters per meter calculated at profile lines 14 and 4, respectively. The wind record during the interval (Fig. 18) showed no unusual events to account for such a change, and no visual wave observations or sea level data were available to document conditions during the interval.

(b) 14 January-8 February 1971. Wind conditions and relative water levels recorded at Wilmington are shown in Figure 19; visual wave observations are given in Table 8. This interval had strong winds occur about 27 January offshore with a strong longshore component to the east. The highest water level during the interval occurred just before this date. No unusual conditions were indicated in wave observations, which were available for only about 30 percent of the time early in the interval. Erosion was general along the central reach with a maximum and minimum of -17.83 and -5.46 cubic meters per meter at profile lines 7 and 8, respectively. This observation at adjacent profile lines emphasizes the longshore variability in erosion. Observed conditions during this erosion period did not appear to be substantially different from those during periods of accretion, which suggests that water level and wind conditions measured at Wilmington are not well correlated with changes at Holden Beach.

(c) 29 September-11 December 1972. No storms or particular events during this interval appeared solely responsible for the erosion (Fig. 20). However, several wind events were persistent for several days, and these can be visually correlated with higher water levels. Onshore winds occurred 19-22 November and again 25-28 November; such winds may pile water against the coast to produce high water levels and generate local waves which cause erosion. Erosion during this interval resulted in a sand loss ranging from -14.2 to -1.8 cubic meters per meter at profile lines 9 and 5, respectively. During the same interval, both inlet reaches experienced a net gain in sand volume.

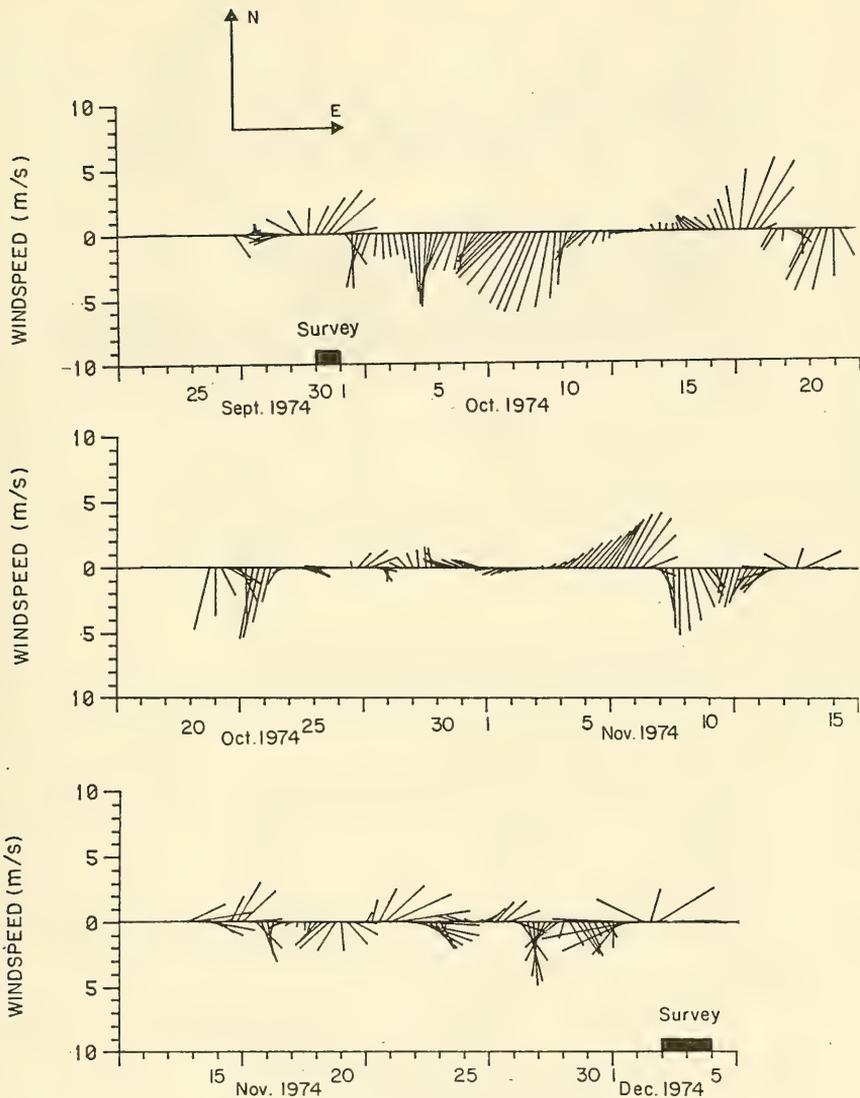


Figure 18. Wind velocity recorded at Wilmington, North Carolina, between 30 September-3 December 1974.

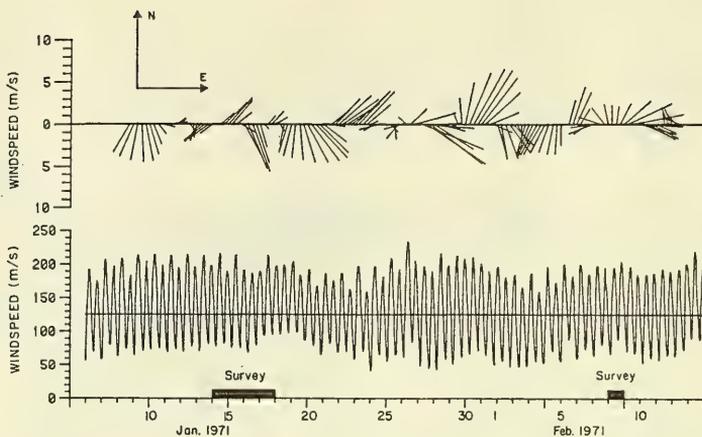


Figure 19. Wind velocity and water level during erosion event recorded at Wilmington, North Carolina, between survey dates 14 January-8 February 1971.

Table 8. Visual wave observations of erosion and accretion events at Holden Beach during BEP study.

Event	Wave direction from				Energy flux toward			Net	Gross	Pct complete
	90° Offshore	Calm	72° ^o (left)	108° ^o (right)	Onshore	West	East			
Erosion										
30 Sept.- 3 Dec. 1974 ¹										
14 Jan. - 8 Feb. 1971	6	0	0	6	7.76	0	-12.52	-12.52	20.28	0.29
29 Sept.-11 Dec. 1972	22	1	23	3	192.90	63.84	-18.35	45.49	275.09	64
28 Mar. -13 Apr. 1973	13	0	2	1	263.08	6.66	-5.66	1.00	275.40	100
9 June -25 June 1972	8	0	3	2	73.54	35.76	-16.59	19.17	125.88	81
Accretion										
12 Nov. -14 Dec. 1970 ¹										
13 Apr. -14 June 1970	44	0	10	3	486.13	39.82	-44.64	-4.82	570.56	90
13 Apr. - 9 June 1972	28	0	21	4	165.81	90.80	-15.07	75.73	105.87	91
5 Aug. -29 Sept. 1972	17	0	18	0	225.08	76.50	0	76.50	301.59	64
15 June -12 July 1973	14	1	11	2	53.19	38.69	-12.14	26.05	104.52	97

¹No visual wave data.

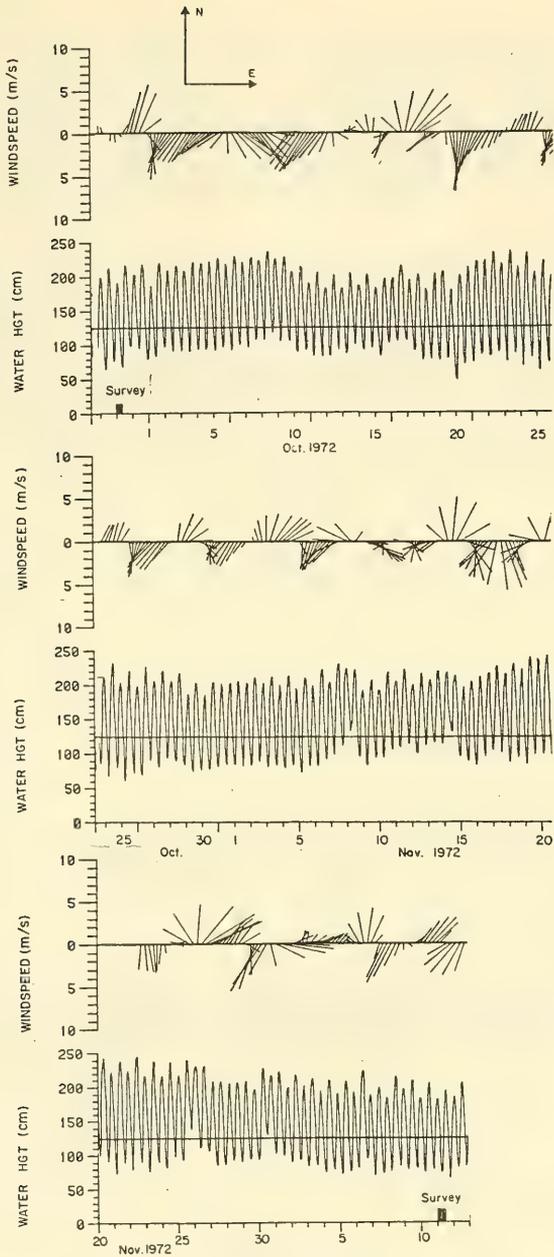


Figure 20. Wind velocity and water level recorded at Wilmington, North Carolina, 29 September-11 December 1972.

(d) 28 March-13 April 1973 and 9-25 June 1972. Wind and water level records for the remaining two erosion periods are shown in Figures 21 and 22. Both intervals showed instances of relatively strong onshore winds combined with high water levels. Both also exhibited strong longshore winds which may be instrumental in developing obliquely incident waves or wind-driven currents which increased littoral transport.

(e) 14 November-14 December 1970. The largest mean increase in volume occurred along the central reach during this interval. Winds were mainly onshore but never severe (Fig. 23). The strongest winds (about 7.6 meters per second) occurred from the north on 25 November during a period of low water level. The highest water during the interval occurred about 30 November to 1 December during light and variable winds. The increase in sand volume along the central reach was general during the interval with maximum and minimum of 17.6 and 1.1 cubic meters per meter at profile lines 7 and 17, respectively. In spite of the large net gain, profile lines 1 and 2 experienced a loss of sand.

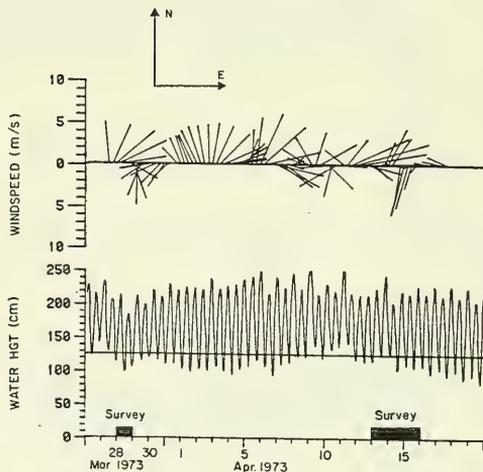


Figure 21. Wind velocity and water level recorded at Wilmington, North Carolina, 28 March-13 April 1973.

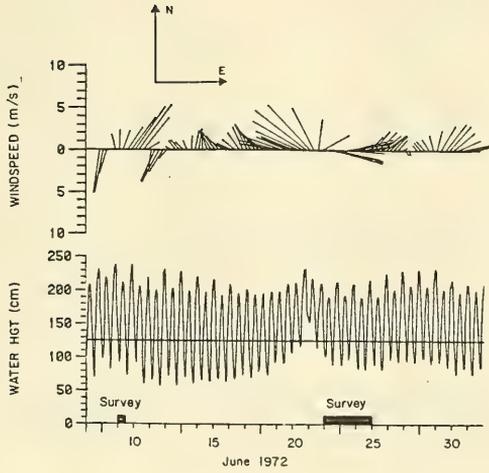


Figure 22. Wind velocity and water level recorded at Wilmington, North Carolina, 9-25 June 1972.

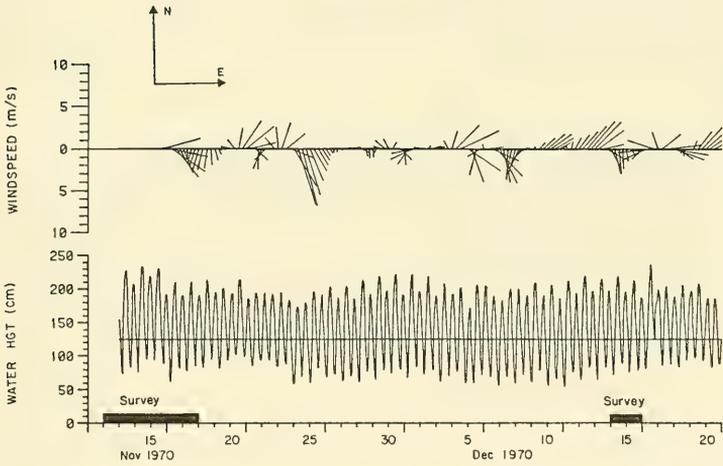


Figure 23. Wind velocity and water level recorded at Wilmington, North Carolina, 12 November - 14 December 1970.

(f) 13 April-14 June 1973. Winds during almost the entire interval were onshore with several instances of strong winds and high water levels (Fig. 24), which occurred 27 April and again 28 May (Table 7). During other periods, however, strong onshore winds were associated with relatively low water. The 10 days before the final survey showed steady onshore winds at a maximum of 3.5 meters per second. Accretion was general along the central reach except at profile lines 15 and 18 which showed slight volume losses. The maximum gain of 19.0 cubic meters per meter occurred at profile line 4.

(g) 13 April-9 June 1972. Onshore winds occurred during most of the interval with strong offshore winds occurring about 26 May (Fig. 25). Water levels were high during strong onshore winds 14 May, but for 5 of the 7 days before the final survey, water was low and onshore winds were gentle. Maximum and minimum volume changes were 19.7 and -4.1 at profile lines 17 and 5, respectively. Erosion was general along the Shallotte reach.

(h) 5 August-29 September 1972 and 14 June-12 July 1973. The remaining two accretion periods showed light onshore or variable winds during several days before the final survey (Figs. 26 and 27).

2. Spatial Variability.

Shoreline and volume changes along Holden Beach occur much more rapidly and to a greater degree in the inlet reaches than along the central reach (Tables 4 and 5). The variability is apparently associated with the flow and transport processes through the inlet. Systematic migrating wavelike features were inferred by Everts, DeWall, and Czerniak (1980) to exist along Ludlam Beach, New Jersey. These features, observed from a 10-year record of beach profile measurements, apparently remain intact near inlets and while traversing groin fields. The presence of migrating topography on Holden Beach was tested using the method of these authors. The results were negative. It is possible that migrating features exist but are transparent on an annual time scale.

Changes in the MSL shoreline position, compared by successive surveys (Fig. 28), suggest migrating features during several surveys (e.g., 15 Feb.-28 Mar. 1972, etc.). The effects of dredge fill on the MSL shoreline change are clearly shown in the 8 February 1971, 31 September 1971, and 29 September 1972 measurements. Dates along the right of Figure 28 are those of the later survey used to determine the change. The observed features, if real, may have been caused by migrating rhythmic topography such as sandbars or cusps. Migration rates varied from 17 to 30 meters per day.

The mean beach slope measured at MSL along Holden Beach increases westward along the central reach from a value of 1:30 at profile line 5 to 1:20 at profile line 14 (Fig. 29). Though the difference is not great, in the absolute sense, it is statistically significant (at $t_{0.025}$ level) and reflects alongshore differences in beach conditions. These differences could be caused by varying energy, possibly due to wave alterations over bathymetric features not seen in this study or by inlet modification. Longshore grain-size information was not available to test for systematic

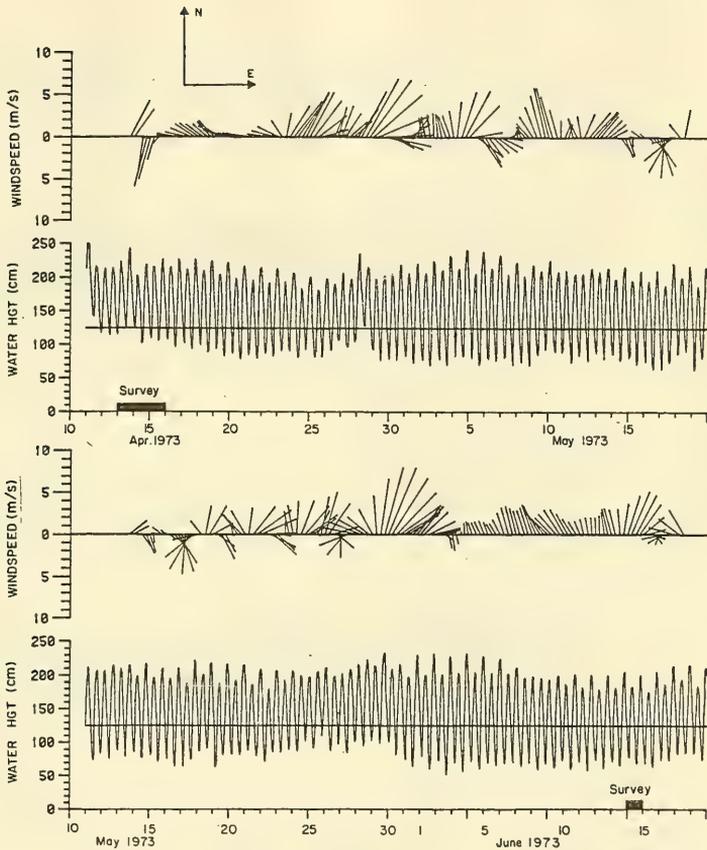


Figure 24. Wind velocity and water level recorded at Wilmington, North Carolina, 13 April-14 June 1973.

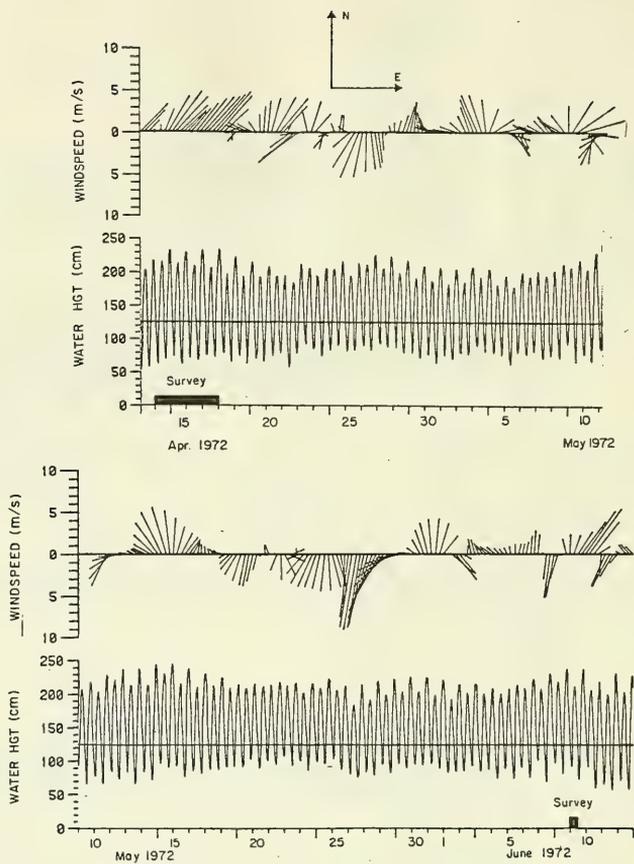


Figure 25. Wind velocity and water level recorded at Wilmington, North Carolina, 13 April-9 June 1972.

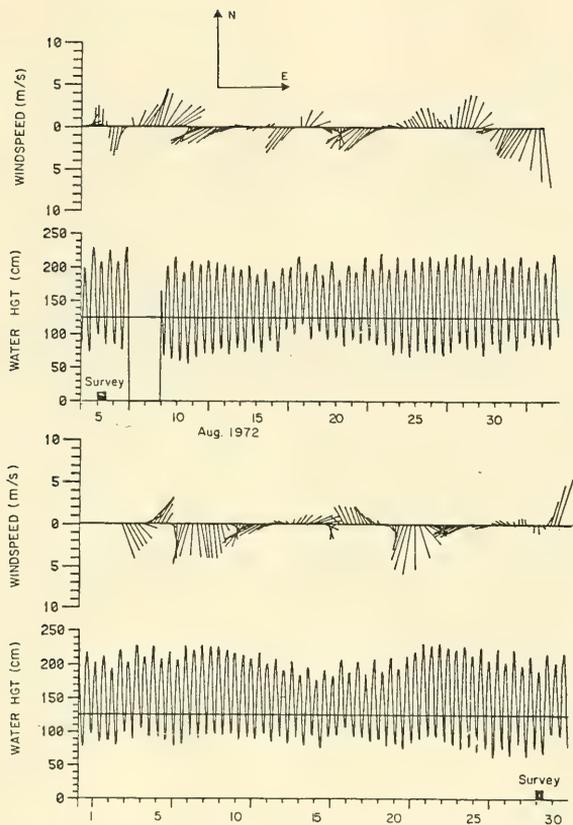


Figure 26. Wind velocity and water level recorded at Wilmington, North Carolina, 5 August-29 September 1972.

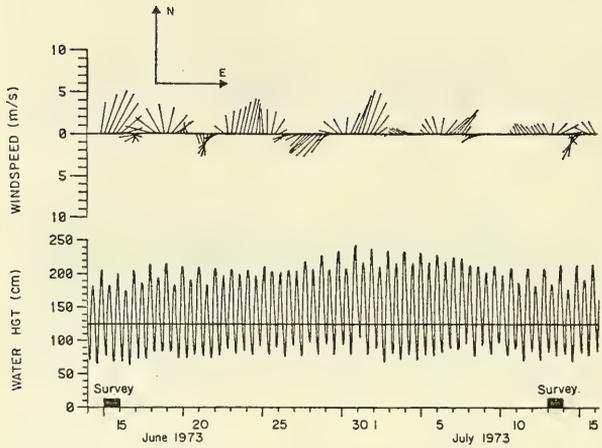


Figure 27. Wind velocity and water level recorded at Wilmington, North Carolina, 14 June - 12 July 1973.

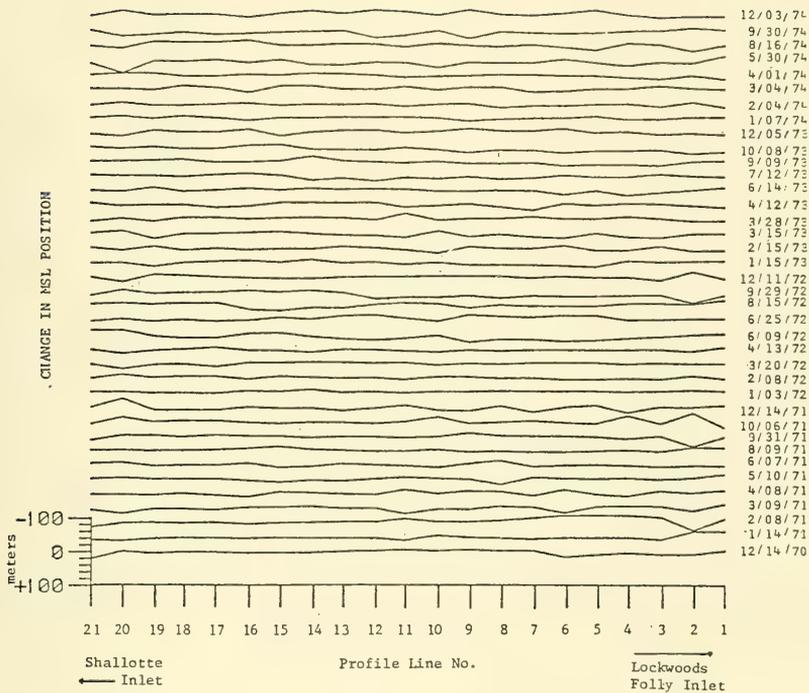


Figure 28. Change in MSL intercept along Holden Beach on successive survey dates. Perspective is that of observer looking northward from offshore. Increase in MSL position is seaward.

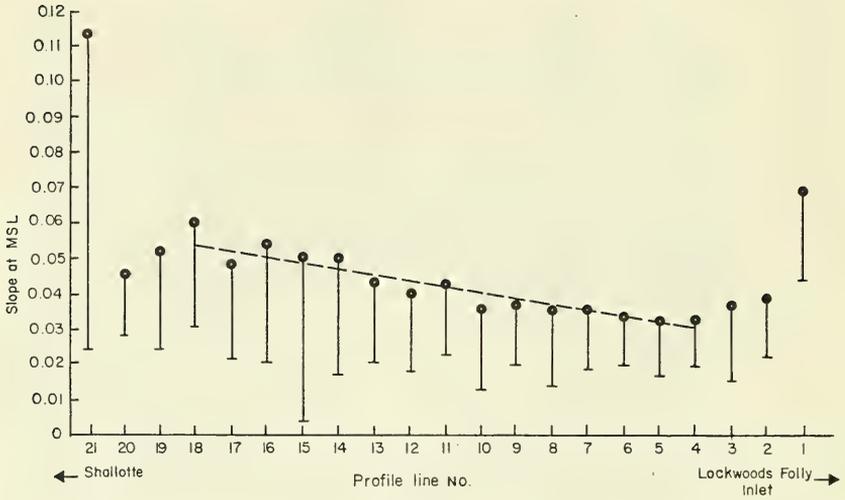


Figure 29. Beach foreshore slope averaged over the study period. Vertical lines are one standard deviation below the mean. Linear trend is the regression, by eye, of the means along the central reach.

variations in that parameter. The slopes of profile lines nearest the two inlet throats (profile lines 1 and 21) show the greatest slope of the study area. The mean slopes at profile lines 2 and 3 have been artificially altered by the beach fill operation.

V. DISCUSSION

1. Profile Changes.

Holden Beach, exposed toward the south and partially protected from large waves from the east by Frying Pan Shoals, is spared the severe erosion caused by east and northeast storms, which arrive along the North Carolina coast mainly during the autumn and winter months. These storms remove large amounts of sand from beaches along the Outer Banks and those shorelines exposed toward the east.

The relative position of the annual mean, MSL intercept (Fig. 15) reflects the number of storm occurrences during the year of measurement (Table 7). The erosion observed over 1971 took place during the year with the largest number of identified storm events, while the increase in MSL intercept over 1974 is correlated with the fewest storms. Changes in sand volume and MSL intercept show extreme variability along the three profile lines comprising each inlet reach, but both have resulted in considerable increases. The limit of significant influence of the inlets, if such exists, has not been determined by these studies. The selection of the inlet reaches, however, provides a convenient separation point based on demonstrated variability. These two measurements are also quite variable along the central reach, but regression analysis and evaluation of the annual change show the MSL position to be extending seaward while the volume decreases. The total annual loss in volume along the central reach (rate of volume change times total length) is approximately balanced by the gains at the two inlet reaches. A similar computation using the regression estimates indicates the volume gains at the inlets are each 3 to 4 times greater than the loss along the central reach. The island appears to be gaining sand volume at the ends while losing volume along the center. The MSL intercept is also progressing seaward more rapidly at the inlet areas. Plots of the actual beach profiles were compared for 14 December 1970 and 4 December 1974. Though possibly not indicative of the entire 4-year span, each set of measurements was taken after a storm (Birkemeier, 1979) so the general beach condition may be comparable. The earlier profiles were characterized by steep foreshore slopes and a backshore area that was convex upward. This was backed by the coastal dune, present in both surveys. The 4 December 1974 profiles showed an offshore bar along most of the central reach with a backshore concave upward, a condition more typical of the storm profile. A considerable volume of sand was removed above MSL and deposited in the offshore bar while the MSL intercept was extended seaward. The actual volume change at the -0.9-meter MSL datum appears to be very small, but the beach face was considerably lowered and extended. If the long-term change in the central reach is toward a lower backshore and extended foreshore, the island may be developing a greater susceptibility to dune erosion by direct wave attack during a storm accompanied by high water and large waves. Future studies of beach volume changes should extend farther into the offshore zone to measure the storage of sand in bars. The rates of change of both MSL intercept and above MSL volume measured here

are small compared to the short-term variability so the direction of the trend, if any, is not clearly shown by this data set. A longer record may be necessary to establish a convincing trend.

The seasonal nature of the above MSL volume was shown in Figure 16. The material removed from the beach during the autumn and winter is apparently replaced (or nearly so) during spring and summer. Extending the profile lines below MSL would allow determination of the offshore changes which have been shown to be important in the beach process. It is possible that the volume change of an extended profile line measured relative to some below MSL datum would be zero if material removed from the beach is stored in the offshore within the range of profile line measurement. Empirical eigenfunction analysis is very useful in showing the regions where changes in beach shape take place. Aubrey (1979) demonstrated that the second temporal eigenfunction showed removal of beach material from onshore and storage in the offshore zone at Torrey Pines Beach. Unless profile line measurements are taken with the method of analysis in mind, it is only fortuitous that a "higher order" analysis technique, which is more powerful and sophisticated, will provide additional insights. The application of empirical eigenfunctions to the Torrey Pines data was fruitful because the study was designed, in part, to develop and test the method. Empirical eigenfunctions did not provide insights into Holden Beach processes that were not available through more traditional and straightforward analysis methods, but the reasons may be due more to the limitations of the data than to the technique. Though not useful for the Holden Beach data, there are indications that empirical eigenfunctions will be helpful in the interpretation of temporal and spatial variability of other data in this series.

The results of this study suggest that Holden Beach has at least three separate systems to be investigated and interrelated in order to understand processes, such as differences in response to environmental forces (erosion rates, variability of profile changes, and mean slopes) along the beach. These are the Lockwoods Folly reach (profile lines 1 through 3) the central reach (profile lines 4 through 18) and the Shallotte reach (profile lines 19 through 21). Refraction of waves around shoal area, strong tidal currents, and shifting channels near inlet reaches require special, localized observations.

Changes observed along the central reach were visually correlated with wind and water level records taken at Wilmington. These correlations were not altogether satisfactory because of the location of Wilmington relative to Holden Beach; direct wind and water level observations at the site would have shown a more reliable correlation with beach changes.

The identified erosion events were fairly well correlated with high water levels and strong winds during an observation period. The conditions which cause accretion, however, are not easily identified since high water levels and strong onshore winds occurred during these intervals as well. Accretion events seemed to be correlated with gentle onshore winds occurring for several days before the survey (Figs. 23 to 27). Profile line measurements must be taken more frequently in order to isolate the effects of individual events.

Investigations have shown that considerable beach changes occur below MSL, in and beyond the breaker zone. Sand observed on the upper parts of the beach during summer months may be removed and stored in offshore sand-bars or transported alongshore during the stormier periods. Material appears to be removed from Holden Beach on a seasonal cycle; however, during the 4-year period, more was returned to the beach than was removed. The fate of the material lost is uncertain. Direct visual observations of waves during the study period indicate transport from east to west is two to three times greater than from west to east, a direction in opposition to that reported from Long Beach and Yaupon Beach (U.S. Army Engineer District, Wilmington, 1973). The transport from Long Beach and Yaupon Beach was based on a wave refraction analysis which systematically eliminated waves from the east and southeast. The remaining waves caused eastward littoral drift. The Holden Beach estimate, though based on once-daily visual observations, is not complete for the entire period. It is quite possible for large waves from one direction for a single day to overcome the estimated transport of smaller waves for several days. The importance of complete, frequent, and accurate wave observations, which include period, height, and breaker angle, cannot be overestimated for making predictions of transport direction and rate.

2. Civil Engineering Implications.

Before 1973, the east end of Holden Beach was identified as having the highest erosion rate of any beach area in Brunswick County. This severe condition damaged the end of a road and caused the removal of six houses (U.S. Army Engineer District, Wilmington, 1973). The addition of fill material at profile line 2 appears to have been effective in reducing the erosion at the end of the island during the study period. At least 280 000 cubic meters of sand was added to the beach from 1970 to 1974. An increase in sand volume is evident along the east end of the central reach, suggesting that the fill was effective in nourishing that end of the island.

Currently, there are no shore protection structures along the beach which interfere with the transport of sand. The sand loss along the central reach during 1971 and 1974 was relatively great and contributed substantially to the net 4-year loss in that zone which is evident in spite of the fact that the study interval was more quiescent than the long-term mean. More thorough studies should be made before any engineered alterations of the beach in order to resolve the ambiguity in littoral transport rates and direction.

The profile envelopes (App. E) show that the sweep zones of the beach profiles measured at MSL are greatest in the inlet reaches, obtaining magnitudes of more than 3 meters at profile lines 2 and 21. Along the central reach, however, the sweep zones are less than 1 meter. This vertical excursion of the profile must be considered in the engineering design of pipelines and other coastal structures. This study emphasizes the extreme variability of beaches near inlets as opposed to those along unbroken beach segments.

Though washovers have not occurred along Holden Beach since Hurricane Hazel, the central, low-lying part of the island, which is narrow, may become more subject to washovers during storms. Coastal modifications which exacerbate this condition must be avoided.

VI. SUMMARY

A total of 815 profile line surveys were taken at 21 locations along the 13.2-kilometer south-facing shoreline of Holden Beach, North Carolina, from November 1970 to December 1974. The average width of the narrow barrier island is 250 meters, terminated at the east and west end by Lockwoods Folly and Shallotte Inlets, respectively. The profile lines along the beach were evenly spaced with minimum and maximum distances of 565 and 638 meters. Average spacing was 610 meters. This spacing was convenient for calculating total beach sand volume changes since profile distances did not have to be weighted.

The beach profile data were used to determine changes in above MSL sand volume, changes in MSL shore, and profile envelopes. The parameters were analyzed to determine beach changes during the survey period and those caused by individual storms. Additional wave, wind and water level data were provided by visual observation, local wave gages, and from recording devices in Wilmington, North Carolina. Fewer storms than average occurred during the study period for this region, and recorded winds were more moderate.

The beach face was divided into three reaches, based upon the variability of the profile line changes during the study period. The two inlet reaches each contained three profile lines with the remainder in the central reach. The beach slope at MSL along the central reach increased from a value of 1:30 at the east end to 1:17 at the west end. The MSL intercept averaged across the central reach varied from +8.99 meters (9 June 1972) to -13.17 meters (3 December 1974). Linear regression analysis indicates the MSL shoreline is advancing at a rate of 1.18 meters per year while the above MSL volume is decreasing at 0.44 cubic meter per meter per year. The direction of change is supported by analysis on an annual basis though the rates are an order of magnitude different; 0.15 meter per year and 4.8 cubic meters per meter per year, respectively. These estimates should be treated with caution since short term variability is quite large and the coefficient of determination calculated for linear regression is small. Empirical eigenfunction analysis applied to the data did not indicate other systematic modes of variability.

The profile lines in the inlet reaches showed the greatest variability in all calculated parameters. The beach nourishment operation at profile line 2 from 1971 to 1974 was intended to reduce the high erosion rate previously observed at the east end of the island. The approximately 280 000 cubic meters of sand placed on the beach during the study period contributed to the net gains in volume and shoreline position along the Lockwoods Folly reach and may have influenced the beach shape at the east end of the central reach. The Shallotte reach showed even more substantial gains without the benefit of artificial nourishment.

A seasonal trend was evident in the change in above MSL sand volume. Losses occurred during the autumn and winter, and gains were measured during spring and summer. Volume losses along the central reach were greater than gains while the reverse was true for both inlet reaches. The visual wave observations were not complete enough to calculate the magnitude of littoral transport. Estimates of alongshore energy flux suggest, however, that the westward transport is two to three times greater than the eastward transport.

LITERATURE CITED

- AUBREY, D.G., "Seasonal Patterns of Onshore/Offshore Sediment Movement," *Journal of Geophysical Research*, Vol. 84, No. C10, Oct. 1979, pp. 6347-6354.
- BAKER, S., "The Citizen's Guide to North Carolina's Shifting Inlets," UNC Sea Grant Publication UNC-SG-77-08, North Carolina State University, Raleigh, N.C., Mar. 1977.
- BAKER, S., "Storms, People and Property in Coastal North Carolina," UNC Sea Grant Publication UNC-SG-78-15, North Carolina State University, Raleigh, N.C., Aug. 1978.
- BALSILLIE, J.H., "Surf Observations and Longshore Current Prediction," TM-58, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., Nov. 1975.
- BIRKEMEIER, W.A., "Beach Evaluation Program Storm Data Summary," U.S. Army Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., unpublished, July 1979.
- BOC, S.J., and LANGFELDER, J., "An Analysis of Beach Overwash Along North Carolina's Coast," Report No. 77-9, Center for Marine and Coastal Studies, North Carolina State University, Raleigh, N.C., 1977.
- BRUNO, R.O., and HIIPAKKA, L.W., "Littoral Environment Observation Program in the State of Michigan," *Proceedings of the 16th Conference on Great Lakes Research*, 1974, pp. 492-507 (also Reprint 4-74, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., NTIS 777 706).
- CARNEY, C.B., and HARDY, A.V., "North Carolina Hurricanes," Weather Bureau, ESSA, U.S. Department of Commerce, Washington, D.C., 1967.
- CLEARY, W. J., and HOSIER, P.E., "Geomorphology, Washover History, and Inlet Zonation: Cape Lookout, NC to Bird Island, NC," *Barrier Islands from the Gulf of St. Lawrence to the Gulf of Mexico*, S.P. Leatherman, ed., Academic Press, New York, 1979, pp. 237-171.
- DeWALL, A.E., "Beach Changes at Westhampton Beach, New York, 1962-73," MR 79-5, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., Aug. 1979.
- DeWALL, A.E., PRITCHETT, P.C., and GALVIN, C.J., Jr., "Beach Changes Caused by The Atlantic Coast Storm of 17 December 1970," TP 77-1, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., Jan. 1977.
- DOLAN, R., et al., "The Reliability of Shoreline Change Measurements from Aerial Photographs," *Shore and Beach*, Vol. 48, No. 4, Oct. 1980, pp. 22-29.
- DOLAN, R., et al., "Shoreline Erosion Rates Along the Middle Atlantic Coast of the United States," *Geology*, Vol. 7, No. 12, Dec. 1979, pp. 602-606.

- DRAPER, N.R., and SMITH, H., *Applied Regression Analysis*, John Wiley and Sons, Inc., New York, 1966.
- EVERTS, C.H., and CZERNIAK, M.T., "Spatial and Temporal Changes in New Jersey Beaches," *Proceedings of the Coastal Sediments '77 Conference, American Society of Civil Engineers*, 1977, pp. 444-459 (also Reprint 78-9, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., NTIS A051 578).
- EVERTS, C.H., DeWALL, A.E., and CZERNIAK, M.T., "Beach and Inlet Changes at Ludlum Beach, New Jersey," MR 80-3, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., May 1980.
- GOLDSMITH, V., FARRELL, S.C., and GOLDSMITH, Y.E., "Shoreface Morphology Study, The South End of Long Beach Island, Little Beach Island, and the North End of Brigantine Island," Dames and Moore, Inc., Oct. 1974.
- HAYES, M.O., "Barrier Island Morphology as a Function of Tidal and Wave Regime," *Barrier Islands from the Gulf of St. Lawrence to the Gulf of Mexico*, S.P. Leatherman, ed., Academic Press, New York, 1979, pp. 1-27.
- KOMAR, P.D., *Beach Processes and Sedimentation*, Prentice-Hall, Inc., Englewood Cliffs, N.J., 1976.
- LANGFELDER, L.J., STAFFORD, D., and AMEIN, M., "A Reconnaissance of Coastal Erosion in North Carolina," Department of Civil Engineering Report, North Carolina State University, Raleigh, N.C., 1968.
- LANGFELDER, L.J., et al., "A Historical Review of Some of North Carolina's Coastal Inlets," Report No. 74-1, Center for Marine and Coastal Studies, North Carolina State University, Raleigh, N.C., 1974.
- LORENZ, E.N., "Empirical Orthogonal Functions and Statistical Weather Prediction," Report No. 1, Statistical Forecasting Project, Department of Meteorology, Massachusetts Institute of Technology, Cambridge, Mass., 1959.
- MACHEMEHL, J.L., "An Engineering Evaluation of Low Cost Stabilization Projects in Brunswick County, North Carolina," *Proceedings of the Coastal Sediments '77 Conference, American Society of Civil Engineers*, 1977, pp. 696-715.
- MACHEMEHL, J.L. CHAMBERS, M., and BIRD, N., "Flow Dynamics and Sediment Movement in Lockwood Folly Inlet, North Carolina," UNC Sea Grant Publication UNC-SG-77-11, North Carolina State University, Raleigh, N.C., June 1977.
- NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION, Unpublished data, National Climatic Center Wind Recording Station, Wilmington, N.C., 1971-74.
- NEUMANN, C.J., et al., "Tropical Cyclones of the North Atlantic Ocean, 1871-1977," U.S. Department of Commerce, National Climatic Center, Asheville, N.C., 1978.

- PILKEY, O.H., Jr., NEAL W.J., and PILKEY, O.H., Sr., *From Currituck to Calabash: Living with North Carolina's Barrier Islands*, North Carolina Science and Technology Research Center, Research Triangle Park, N.C., 1978.
- RESIO, D.T., et al., "Systematic Variations in Offshore Bathymetry," *Journal of Geology*, Vol. 85, 1977. pp. 105-113.
- SHEPARD, F.P., *Submarine Geology*, Harper and Row, New York, 1963.
- SZUWALSKI, A., "Littoral Environment Observation Program in California, Preliminary Report," MP 2-70, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Washington, D.C., Feb. 1970.
- THOMPSON, E.F., "Wave Climate at Selected Locations Along U.S. Coasts," TR 77-1, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., Jan. 1977.
- U.S. ARMY, CORPS OF ENGINEERS, COASTAL ENGINEERING RESEARCH CENTER, *Shore Protection Manual*, 3d ed., Vols. I, II, and III, Stock No. 008-022-00113-1, U.S. Government Printing Office, Washington, D.C., 1977, 1,262 pp.
- U.S. ARMY ENGINEER DISTRICT, WILMINGTON, "General Design Memorandum, Phase I, Hurricane Wave Protection and Beach Erosion Control, Brunswick County, North Carolina, Beach Projects, Yaupon and Long Beach Segments," Wilmington, N.C., 1973.
- VINCENT, C.L., et al., "Systematic Variations in Barrier Island Topography," *Journal of Geology*, Vol. 84, 1976, pp. 583-594.
- WAHLS, H.E., "A Survey of North Carolina Beach Erosion by Air Photo Methods," Report No. 73-1, Center for Marine and Coastal Studies, North Carolina State University, Raleigh, N.C., 1973.
- WINANT, C.D., INMAN, D.L., and NORDSTROM, C.E., "Description of Seasonal Beach Changes Using Empirical Eigenfunctions," *Journal of Geophysical Research*, Vol. 80, No. 15, May 1975, pp. 1979-1986.

APPENDIX A

PROFILE LINE DOCUMENTATION AND PHOTOS

This appendix provides ground photos and monument documentation for each of the 21 profile lines along Holden Beach from Lockwoods Folly Inlet to Shallotte Inlet. The horizontal location of each profile line consists of a monument (e.g., capped galvanized pipe) at three stations along the profile line, reference ties measured to local cultural features (when possible), and third-order survey control providing the geodetic and state-plane coordinates of the monument. The station number (with "+", upper right of monumentation sheet) is the distance in feet along the base line from the monument at profile line 1. Northing and easting are in feet. Vertical control at each profile line consists of a third-order elevation of the top of the monument, with respect to the National Geodetic Vertical Datum of 1929. The horizontal and vertical control was done by Moorman and Little, Inc., 115 Broadfoot Avenue, Fayetteville, North Carolina.


All beach profile data were collected at these locations along a line through the monumented point in the direction given by the azimuth of the profile line. Measurements were taken by the firm of W. W. Blanchard, Inc., Wallace, North Carolina. The control surveys and beach profile line measurements were conducted under contracts to the U.S. Army Engineer District, Wilmington.

The black and white ground photos were taken at each profile line in June 1974 and are provided to illustrate the character of the beach at that time.

COUNTRY U.S.A.		TYPE OF MARK GALV. PIPE		STATION 0+00.00 PROFILE 1	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 0+00.00		AGENCY (CAST IN MARKS) C.E.	ELEVATION (FT) 11.60 (DESTROYED)
LATITUDE 033-54-57.421		LONGITUDE 078-14-26.086		DATUM NORTH AMERICA 1927	DATUM 1929 (M.S.L.)
(NORTHING)(EASTING) 2230441.630 (FT) (M)		(EASTING)(NORTHING) 61281.010 (FT) (M)		GRID AND ZONE N.C. LAMBERT	
(NORTHING)(EASTING) (M)		(EASTING)(NORTHING) (M)		GRID AND ZONE	ESTABLISHED BY (AGENCY) CERC
				DATE 1970	ORDER THIRD

TO OBTAIN		GRID AZIMUTH, ADD		TO THE GEODETIC AZIMUTH	
TO OBTAIN		GRID AZ. (ADD)(SUB.)		TO THE GEODETIC AZIMUTH	
OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS)	GRID DISTANCE (METERS)	(FEET)

NOT SHOWN TO SCALE

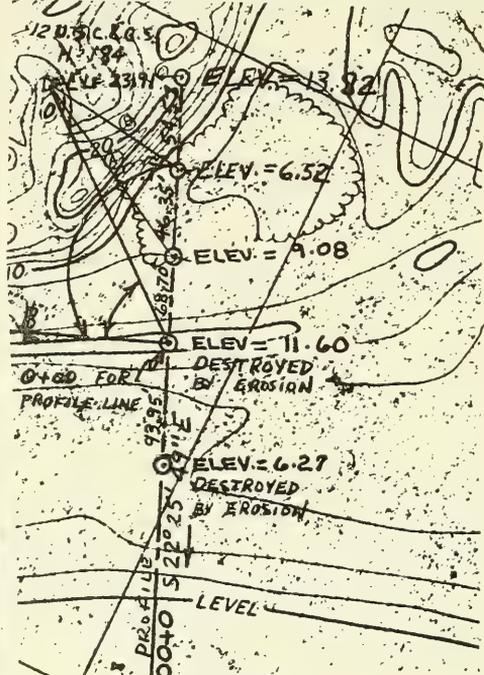

U.S.C. & G.S. MONUMENT LOCATED AT HIGHEST POINT ON EAST END OF HOLDEN BEACH, GRASS DUNE WITH PATHS LEADING TO THE TOP.

DISTANCES

- (A) 87.20'
- (B) 78.85'
- (C) 100.25'

0+00 FOR PROFILE LINE HAS BEEN DESTROYED BY EROSION, USE ONE OF 3 REMAINING PIPES AND PROPER DISTANCE TO LOCATE 0+00 FOR PROFILE LINE

BASELINE STATION 0+00 IS LOCATED ABOUT 1600' EAST OF THE EAST END OF PAVEMENT NEAR LOCKWOODS FOLLY INLET AT HOLDEN BEACH. IT HAS BEEN DESTROYED BY EROSION BUT POINT CAN BE RELOCATED FROM SKETCH OFFSET PIPES

DA FORM 1959 REPLACES DA FORMS 1959 AND 1960, 1 FEB 57, WHICH ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION For use of this form, see TM 5-237; the proponent agency is U.S. Continental Army Command.



Profile line 1. View toward east over Lockwoods Folly Inlet.



Profile line 1. View toward west. Note vegetated dune and wide, unstructured beach.



Profile line 2. View toward east




Profile line 2. View toward west. Note remains of timber pile bulkhead at right.

COUNTRY U. S. A.		TYPE OF MARK GALV. PIPE		STATION 39+99.95		PROFILE 3	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 39+99.95		AGENCY (CAST IN MARKS) C. E.		ELEVATION 8.71 (FT)	
LATITUDE 33-54-51.995		LONGITUDE 78-15-12.088		DATUM NORTH AMERICA 1927		DATUM 1929 (M.S.L.)	
(NORTHING)(EASTING) (FT) 2226568.330 (M)		(EASTING)(NORTHING) (FT) 60702.780 (M)		GRID AND ZONE N.C. LAMBERT		ESTABLISHED BY (AGENCY) CERC	
(NORTHING)(EASTING) (FT) (M)		(EASTING)(NORTHING) (FT) (M)		GRID AND ZONE		DATE 1970	ORDER THIRD

TO OBTAIN GRID AZIMUTH, ADD TO THE GEODETIC AZIMUTH
TO OBTAIN GRID AZ. (ADD)(SUB.) TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS)	(FEET)	GRID DISTANCE (METERS)	(FEET)

NOT SHOWN TO SCALE
W. DAVID SMITH - 259 OCEAN-AIRE APTS.
BROWN COTTAGE WITH
SCREENED-IN PORCH

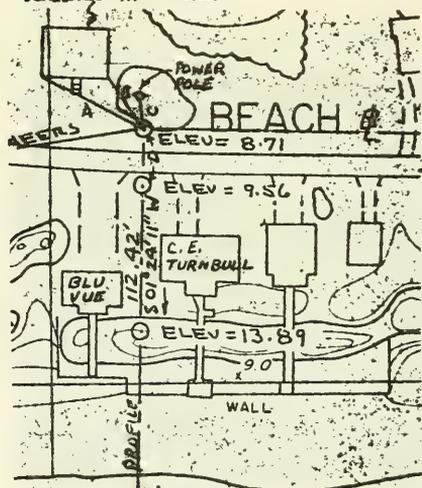

A = 83.89'
B = 48.53'
C = 25.05'
D = 46.02'

STATION NO. PAINTED
IN NORTH LANE.

OTOD ON PROFILE LINE
IS NORTH-MOST PIPE

BEACH

BASELINE

STATION 39+99.95 IS LOCATED 2300'
WEST OF THE EAST END OF PAVEMENT
AT HOLDEN BEACH.

SKETCH

DA FORM 1959
1 OCT 64

REPLACES DA FORMS 1959
AND 1960, 1 FEB 57, WHICH
ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION
For use of this form, see TM 5-237; the proponent
agency is U.S. Continental Army Command.



Profile line 3. View toward east.




Profile line 3. View toward west. Note timber pile bulkhead in each picture.

COUNTRY U.S.A.		TYPE OF MARK GALV. PIPE		STATION 60+75.13 PROFILE 4	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 60+75.13		AGENCY (CAST IN MARKS) C.E.	
LATITUDE 33-54-51.131		LONGITUDE 78-15-36.630		DATUM NORTH AMERICA 1927	
ELEVATION 10.23 (FT.) (M)		ESTABLISHED BY (AGENCY) CERC		DATE 1970	
ORDER THIRD		DATE 1970		ORDER THIRD	

TO OBTAIN	GRID AZIMUTH, ADD	TO THE GEODETIC AZIMUTH
TO OBTAIN	GRID AZ. (ADD)(SUB.)	TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS)	(FEET)	GRID DISTANCE (METERS)	(FEET)

NOT SHOWN TO SCALE

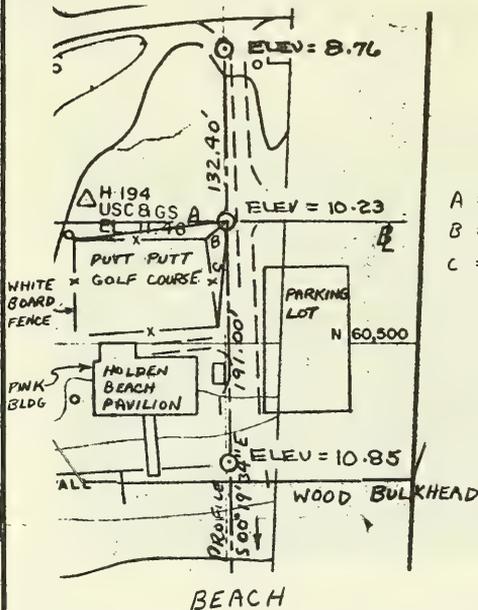

- A = 114.98'
- B = 19.14'
- C = 85.22'

0+00 ON PROFILE LINE
IS MIDDLE PIPE
(MISSING IN JUNE 1974)

BASILINE
STATION 60+75.13 IS LOCATED
JUST EAST OF THE SURFSIDE
PAVILION.

SKETCH

DA FORM 1959

REPLACES DA FORMS 1289
AND 1260, 1 FEB 57, WHICH
ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION

For use of this form, see TM 5-237; the proponent
agency is U.S. Continental Army Command.



Profile line 4. View toward east.



Profile line 4. View toward west from edge of back filled timber pile bulkhead.



Profile line 5. View toward east.




Profile line 5. View toward west.

COUNTRY U. S. A.		TYPE OF MARK GALV. PIPE		STATION 100 + 15.32 PROFILE 6	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 100 + 15.32		AGENCY (CAST IN MARKS) C.E.	
LATITUDE 33-54-48.338		LONGITUDE 78-16-23.219		DATUM NORTH AMERICA 1927	
EASTING (FT) 2220575.440		NORTHING (FT) 60288.910		GRID AND ZONE N.C. LAMBERT	
EASTING (FT) (M)		NORTHING (FT) (M)		ESTABLISHED BY (AGENCY) CERC	
DATE 1970		ORDER THIRD			

TO OBTAIN		GRID AZIMUTH, ADD		TO THE GEODETTIC AZIMUTH	
TO OBTAIN		GRID AZ. (ADD)(SUB.)		TO THE GEODETTIC AZIMUTH	
OBJECT	AZIMUTH OR DIRECTION (GEODETTIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS)	GRID DISTANCE (METERS)	GRID DISTANCE (FEET)

NOT SHOWN TO SCALE

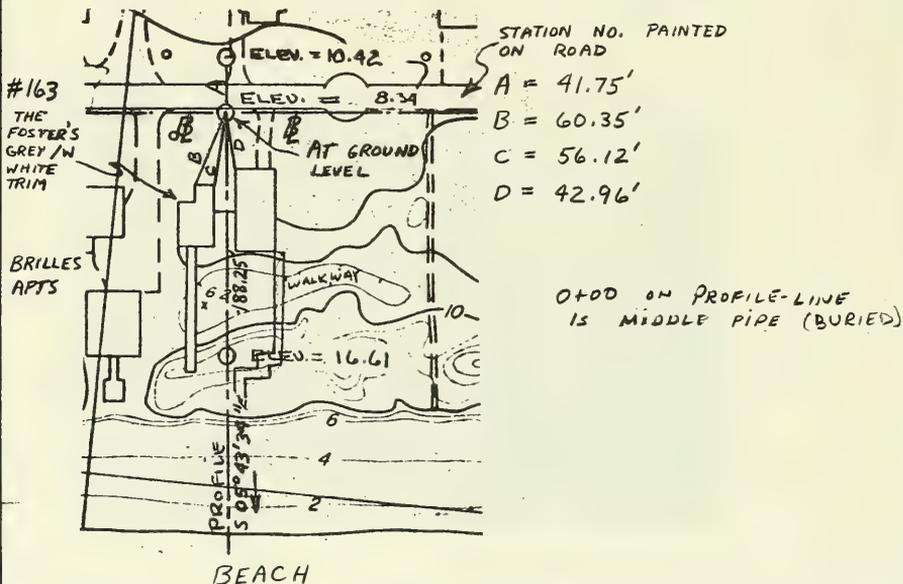

BEACH
 BASELINE STATION 100 + 15.32 IS LOCATED 1750' WEST OF THE INTERSECTION OF WEST OCEAN DRIVE AND THE ROAD TO THE MAINLAND, NEAR BRILLE'S APARTMENTS.

SKETCH

DA FORM 1959
 1 OCT 64

REPLACES DA FORMS 1059 AND 1960, 1 FEB 57, WHICH ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION
 For use of this form, see TM 5-237; the proponent agency is U.S. Continental Army Command.



Profile line 6. View toward east.




Profile line 6. View toward west. Note houses in the vegetated dune and beach access points.

COUNTRY U. S. A.		TYPE OF MARK GALV. PIPE		STATION 120+00.07 PROFILE 7	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 120+00.07		AGENCY (CAST IN MARKS) C. E.	
LATITUDE 33-54-46.523		LONGITUDE 78-16-46.664		DATUM NORTH AMERICA 1927	
(NORTHING)(EASTING) 2218600.590 (M)		(EASTING)(NORTHING) 60090.880 (M)		GRID AND ZONE N. C. LAMBERT	
(NORTHING)(EASTING) (M)		(EASTING)(NORTHING) (M)		GRID AND ZONE	
				ESTABLISHED BY (AGENCY) CERC	
				DATE 1970	
				ORDER THIRD	

TO OBTAIN GRID AZIMUTH, ADD TO THE GEODETIC AZIMUTH
 TO OBTAIN GRID AZ. (ADD)(SUB.) TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS) (FEET)	GRID DISTANCE (METERS) (FEET)

NOT SHOWN TO SCALE

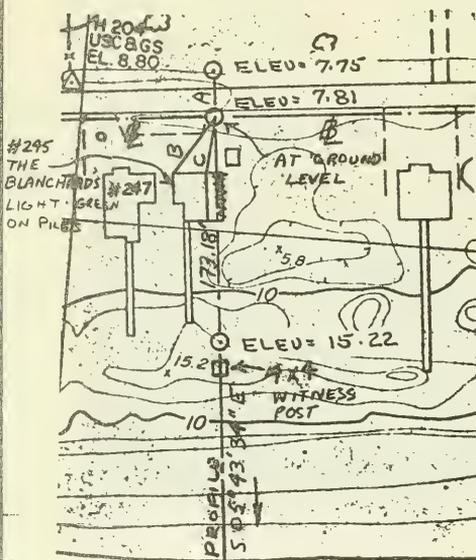

STATION NO. PAINTED ON ROAD

A = 37.00'
 B = 57.16'
 C = 43.57'

0+00 ON PROFILE LINE IS MIDDLE PIPE

BEACH

BASILINE STATION 120+00.07 IS LOCATED ABOUT 3700' WEST OF THE INTERSECTION OF THE MAINLAND AND WEST OCEAN DRIVE.

SKETCH

DA FORM 1959
 OCT 64

REPLACES DA FORMS 1959 AND 1960, 1 FEB 67, WHICH ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION
 For use of this form, see TM 5-237; the proponent agency is U.S. Continental Army Command.



Profile line 7. View toward east.




Profile line 7. View toward west.

COUNTRY U.S.A.	TYPE OF MARK GALV. PIPE	STATION 140+61.79	PROFILE 8	
LOCALITY HOLDEN BEACH, N.C.	STAMPING ON MARK 140+61.79	AGENCY (CAST IN MARKS) C. E.	ELEVATION (FT) 6.68 (M)	
LATITUDE 33-54-44.417	LONGITUDE 78-17-10.991	DATUM NORTH AMERICA 1927	DATUM 1929 (M.S.L.)	
(NORTHING)(EASTING) (FT) 2216551.500 (M)	(EASTING)(NORTHING) (FT) 59863.170 (M)	GRID AND ZONE N.C. LAMBERT	ESTABLISHED BY (AGENCY) CERC	
(NORTHING)(EASTING) (FT) (M)	(EASTING)(NORTHING) (FT) (M)	GRID AND ZONE (M)	DATE 1970	ORDER THIRD

TO OBTAIN GRID AZIMUTH, ADD TO THE GEODETIC AZIMUTH
 TO OBTAIN GRID AZ. (ADD)(SUB.) TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID)(MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS) (FEET)	GRID DISTANCE (METERS) (FEET)

NOT SHOWN TO SCALE

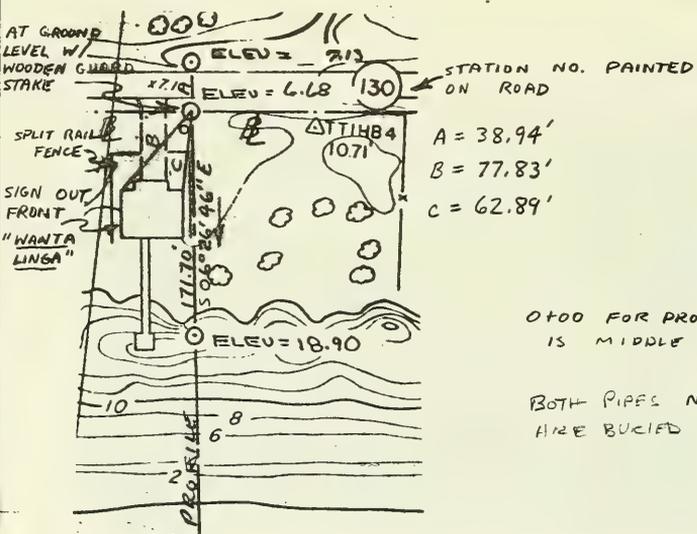

O100 FOR PROFILE LINE IS MIDDLE PIPE

BOTH PIPES NEAR ROAD ARE BUCKED (NOT 75)

BASELINE STATION 140+61.79 IS LOCATED ABOUT 1 MILE WEST OF THE INTERSECTION OF THE MAINLAND ROAD AND WEST OCEAN DRIVE.



SKETCH



Profile line 8. View toward east.




Profile line 8. View toward west.

COUNTRY U.S.A.		TYPE OF MARK GALV. PIPE		STATION 160+15.75 PROFILE 9	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 160+15.75		AGENCY (CAST IN MARKS) C.E.	
LATITUDE 33-54-42.384		LONGITUDE 78-17-34.043		DATUM NORTH AMERICA 1927	
ELEVATION 6.94 (FT) (M)		ESTABLISHED BY (AGENCY) CERC		DATE 1970	
ORDER THIRD		GRID AND ZONE N.C. LAMBERT		DATE 1970	
GRID AND ZONE		DATE		ORDER	

TO OBTAIN GRID AZIMUTH, ADD TO THE GEODETIC AZIMUTH
 TO OBTAIN GRID AZ. (ADD)(SUB.) TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS)	GRID DISTANCE (METERS)	FEET

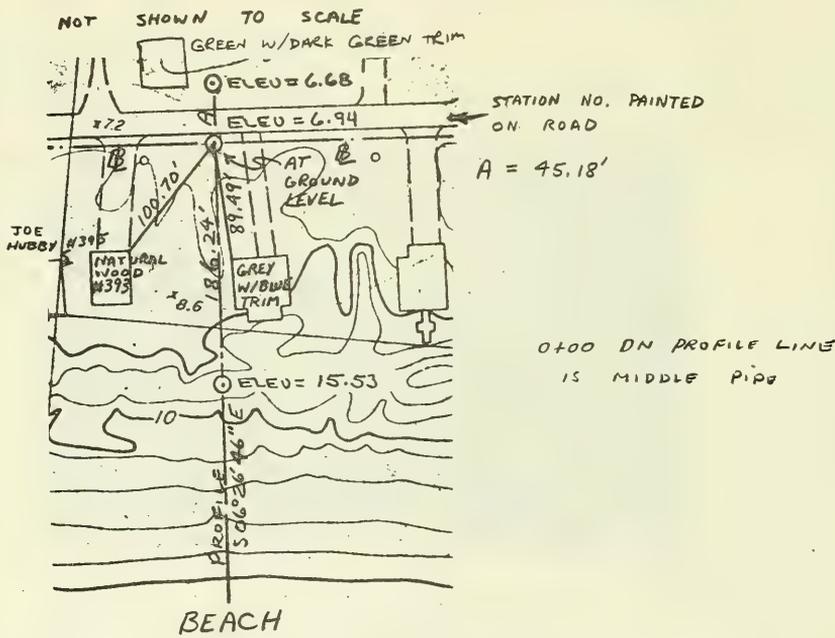

BEACH

BASELINE STATION 160+15.75 IS LOCATED ABOUT 1.5 MILES WEST OF THE INTERSECTION OF THE MAINLAND ROAD AND WEST OCEAN DRIVE.

SKETCH

DA FORM 1959
1 OCT 64

REPLACES DA FORMS 1959 AND 1960, 1 FEB 57, WHICH ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION
 For use of this form, see TM 5-237; the proponent agency is U.S. Continental Army Command.




Profile line 9. View toward east.



Profile line 9. View toward west.

COUNTRY U.S.A.		TYPE OF MARK GALV. PIPE		STATION 180+00.32 PROFILE 10	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 180+00.32		AGENCY (CAST IN MARKS) C.E.	
LATITUDE 33-54-40.486		LONGITUDE 78-17-57.976		DATUM NORTH AMERICA 1927	
ELEVATION 7.14 (FT) (M)		ESTABLISHED BY (AGENCY) CERC		DATE 1970	
NORTHING(EASTING) (FT) 2212636.030 (M)		EASTING(NORTHING) (FT) 59437.980 (M)		GRID AND ZONE N.C. LAMBERT	
NORTHING(EASTING) (FT) (M)		EASTING(NORTHING) (FT) (M)		GRID AND ZONE	
TO OBTAIN		GRID AZIMUTH, ADD		TO THE GEODETIC AZIMUTH	
TO OBTAIN		GRID AZ. (ADD)(SUB.)		TO THE GEODETIC AZIMUTH	

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS)	GRID DISTANCE (METERS)

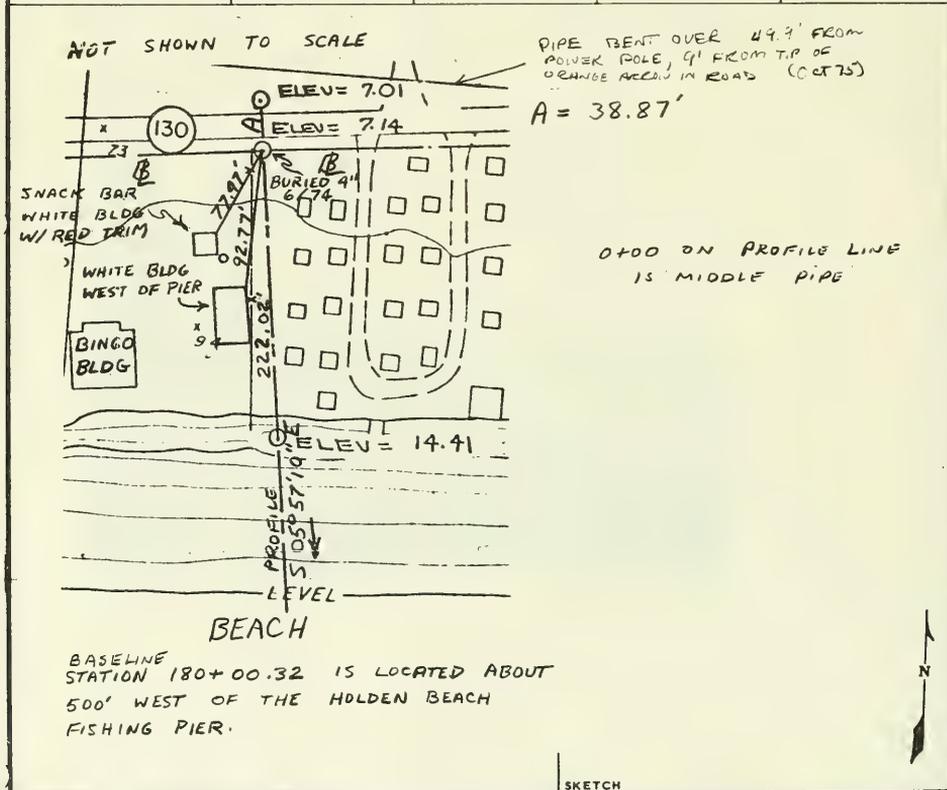

DA FORM 1959 OCT 64 REPLACES DA FORMS 1959 AND 1960, 1 FEB 57, WHICH ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION For use of this form, see TM 5-237; the proponent agency is U.S. Continental Army Command.




Profile line 10. View toward west.



Profile line 10. View toward east and Holden Beach fishing pier.

COUNTRY U.S.A.		TYPE OF MARK GALV. PIPE		STATION 200 + 51.65 PROFILE 11	
LOCALITY HOLDEN BEACH, U.S.		STAMPING ON MARK 200 + 51.65		AGENCY (CAST IN MARKS) C.E.	
LATITUDE 33-54-38.250		LONGITUDE 78-18-21.609		DATUM NORTH AMERICA 1927	
NORTHING(EASTING) 2210603.310 (FT) (M)		EASTING(NORTHING) 59197.580 (FT) (M)		ELEVATION 7.36 (FT) (M)	
NORTHING(EASTING) (M)		EASTING(NORTHING) (FT) (M)		DATUM 1929 (M.S.L.)	
TO OBTAIN		GRID AZIMUTH, ADD		TO THE GEODETIC AZIMUTH	
TO OBTAIN		GRID AZ. (ADD)(SUB.)		TO THE GEODETIC AZIMUTH	
OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS)	GRID DISTANCE (METERS)	ORDER
			(FEET)	(FEET)	THIRD

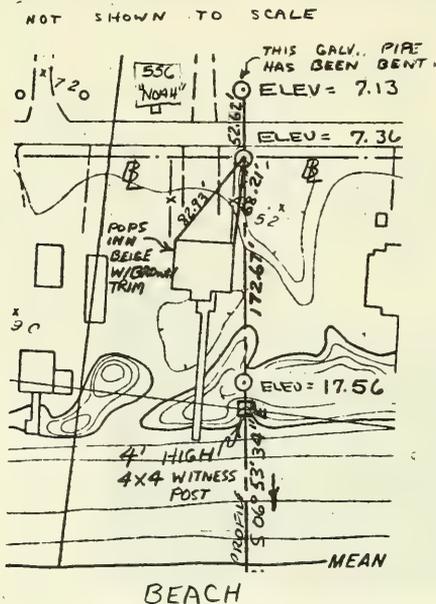

O+OO ON PROFILE LINE IS MIDDLE PIPE

BASELINE STATION 200 + 51.65 IS LOCATED ABOUT 0.5 MILE WEST OF THE HOLDEN BEACH FISHING PIER.

SKETCH



Profile line 11. View toward east.




Profile line 11. View toward west.

COUNTRY U. S. A.		TYPE OF MARK GALV. MARK		STATION 220+00.74		PROFILE 12	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 220+00.74		AGENCY (CAST IN MARKS) C. E.		ELEVATION (FT) 8.96 (M)	
LATITUDE 33-54-36.070		LONGITUDE 78-18-44.583		DATUM NORTH AMERICA 1927		DATUM 1929 (M.S.L.)	
(NORTHING)(EASTING) (FT) (M) 2208668.310		(EASTING)(NORTHING) (FT) (M) 58963.670		GRID AND ZONE N.C. LAMBERT		ESTABLISHED BY (AGENCY) CERC	
(NORTHING)(EASTING) (FT) (M)		(EASTING)(NORTHING) (FT) (M)		GRID AND ZONE		DATE 1970	ORDER THIRD

TO OBTAIN GRID AZIMUTH, ADD TO THE GEODETIC AZIMUTH
 TO OBTAIN GRID AZ. (ADD)(SUB.) TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS) (FEET)	GRID DISTANCE (METERS) (FEET)

NOT SHOWN TO SCALE

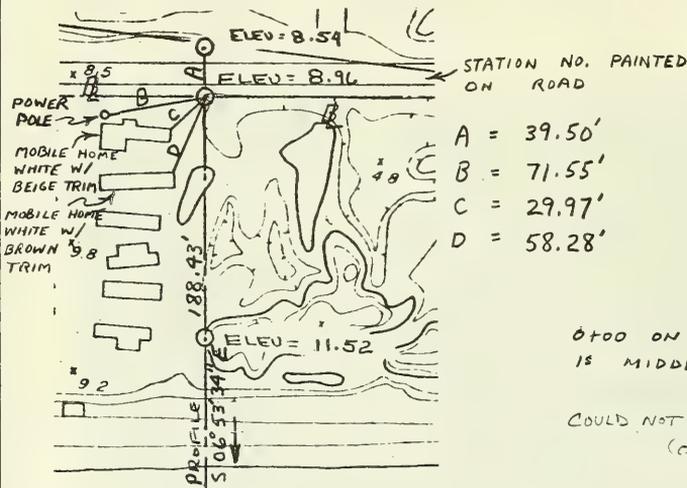

BEACH

BASILINE STATION 220+00.74 IS LOCATED ABOUT 4500' WEST OF THE HOLDEN BEACH FISHING PIER.

SKETCH

DA FORM 1959

REPLACES DA FORMS 1959 AND 1960, 1 FEB 57, WHICH ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION

For use of this form, see TM 5-237; the proponent agency is U.S. Continental Army Command.



Profile line 12. View toward east.




Profile line 12. View toward west.

COUNTRY U. S. A.		TYPE OF MARK GALV. PIPE		STATION 240+08.64		PROFILE 13	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 240+08.64		AGENCY (CAST IN MARKS) C.E.		ELEVATION 7.12 (FT) (M)	
LATITUDE 33-54-33.823		LONGITUDE 78-19-08.250		DATUM NORTH AMERICA 1927		DATUM 1929 (M.S.L.)	
(NORTHING)(EASTING) 2206674.920 (M)		(EASTING)(NORTHING) 58722.700 (M)		GRID AND ZONE N. C. LAMBERT		ESTABLISHED BY (AGENCY) CERC	
(NORTHING)(EASTING) (M)		(EASTING)(NORTHING) (M)		GRID AND ZONE		DATE 1970	
						ORDER THIRD	

TO OBTAIN GRID AZIMUTH, ADD TO THE GEODETIC AZIMUTH
TO OBTAIN GRID AZ. (ADD)(SUB.) TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS) (FEET)	GRID DISTANCE (METERS) (FEET)

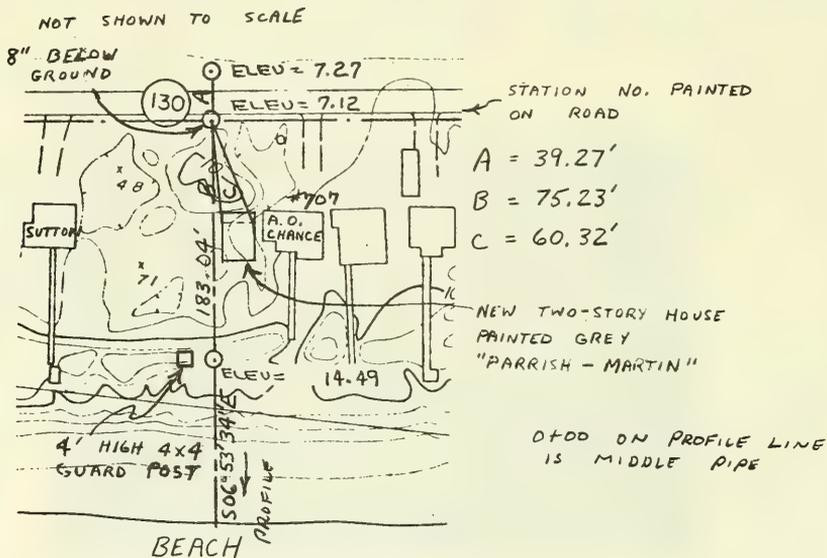

BASELINE STATION 240+08.64 IS LOCATED ABOUT 1.25 MILES WEST OF THE HOLDEN BEACH FISHING PIER.

SKETCH

DA FORM 1959
1 OCT 64

REPLACES DA FORMS 1959 AND 1960, 1 FEB 57, WHICH ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION
For use of this form, see TM 5-237; the proponent agency is U.S. Continental Army Command.



Profile line 13. View toward east.




Profile line 13. View toward west.

COUNTRY U. S. A.		TYPE OF MARK GALV. PIPE		STATION 260+04.84		PROFILE 14	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 260+04.84		AGENCY (CAST IN MARKS) C.E.		ELEVATION 6.68 (FT) (M)	
LATITUDE 33-54-31.587		LONGITUDE 78-19-31.776		DATUM NORTH AMERICA 1927		DATUM 1929 (M.S.L.)	
NORTHING(EASTING) (FT) 2204693.150 (M)		EASTING(NORTHING) (FT) 58483.130 (M)		GRID AND ZONE N. C. LAMBERT		ESTABLISHED BY (AGENCY) CERC	
NORTHING(EASTING) (FT) (M)		EASTING(NORTHING) (FT) (M)		GRID AND ZONE		DATE 1970	ORDER THIRD

TO OBTAIN	GRID AZIMUTH, ADD	TO THE GEODETIC AZIMUTH
TO OBTAIN	GRID AZ. (ADD)(SUB.)	TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS) (FEET)	GRID DISTANCE (METERS) (FEET)

NOT SHOWN TO SCALE

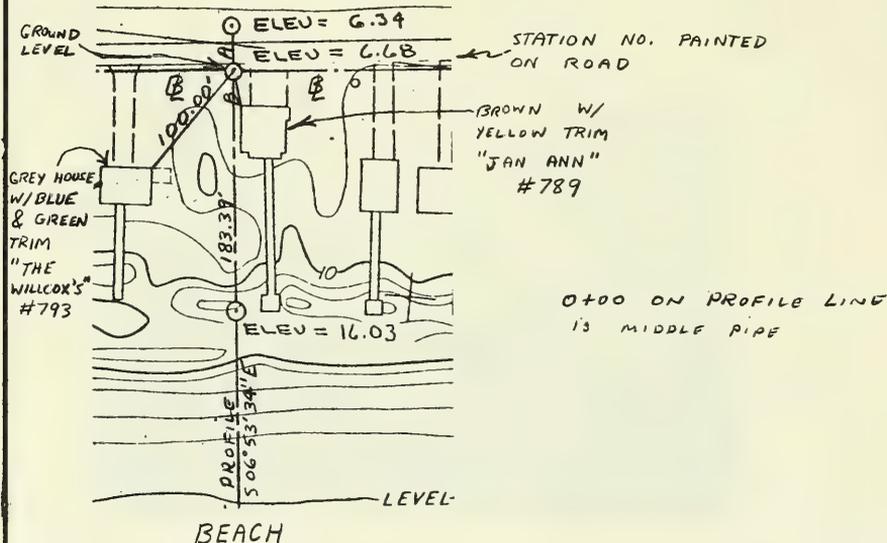

BASELINE
STATION 260+04.84 IS LOCATED
ABOUT 1.5 MILES WEST OF HOLDEN
BEACH FISHING PIER.

SKETCH

DA FORM 1959
1 OCT 64

REPLACES DA FORMS 1959
AND 1960, 1 FEB 57, WHICH
ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION
For use of this form, see TM 5-237; the proponent
agency is U.S. Continental Army Command.



Profile line 14. View toward east.




Profile line 14. View toward west.

COUNTRY U. S. A.		TYPE OF MARK GALV. PIPE		STATION 279+90.14		PROFILE 15	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 279+90.14		AGENCY (CAST IN MARKS) C.E.		ELEVATION 7.07 (FT) (M)	
LATITUDE 33-54-29.095		LONGITUDE 78-19-55.135		DATUM NORTH AMERICA 1927		DATUM 1929 (M.S.L.)	
(NORTHING)(EASTING) 2202725.820 (FT) (M)		(EASTING)(NORTHING) 58217.970 (FT) (M)		GRID AND ZONE N.C. LAMBERT		ESTABLISHED BY (AGENCY) CERC	
(NORTHING)(EASTING) (M)		(EASTING)(NORTHING) (M)		GRID AND ZONE		DATE 1970	ORDER THIRD

TO OBTAIN GRID AZIMUTH, ADD " TO THE GEODETIC AZIMUTH
 TO OBTAIN GRID AZ. (ADD)(SUB.) " TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS) (FEET)	GRID DISTANCE (METERS) (FEET)

NOT SHOWN TO SCALE

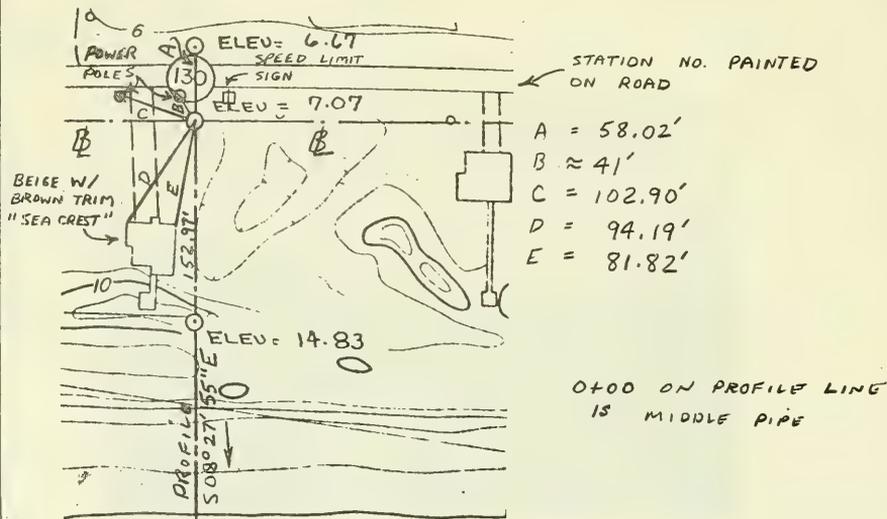

- A = 58.02'
- B ≈ 41'
- C = 102.90'
- D = 94.19'
- E = 81.82'

O+00 ON PROFILE LINE
IS MIDDLE PIPE

BEACH

BASILINE
STATION 279+90.14 IS LOCATED
ABOUT 2.0 MILES WEST OF THE
HOLDEN BEACH FISHING PIER.





Profile line 15. View toward east.




Profile line 15. View toward west. Note wave cut scarp in toe of dune.

COUNTRY U. S. A.		TYPE OF MARK GALV. PIPE		STATION 300+01.44 PROFILE 16	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 300+01.44		AGENCY (CAST IN MARKS) C. E.	ELEVATION (FT) 7.66 (M)
LATITUDE 33-54-26.444		LONGITUDE 78-20-18-781		DATUM NORTH AMERICA 1927	DATUM 1929 (M.S.L.)
(NORTHING)(EASTING) (FT) 2200734.360 (M)	(EASTING)(NORTHING) (FT) 57936.580 (M)	GRID AND ZONE N. C. LAMBERT		ESTABLISHED BY (AGENCY) CERC	
(NORTHING)(EASTING) (M)	(EASTING)(NORTHING) (M)	GRID AND ZONE		DATE 1970	ORDER THIRD

TO OBTAIN		GRID AZIMUTH, ADD		TO THE GEODETIC AZIMUTH	
TO OBTAIN		GRID AZ. (ADD)(SUB.)		TO THE GEODETIC AZIMUTH	

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE		GRID DISTANCE	
			(METERS)	(FEET)	(METERS)	(FEET)

NOT SHOWN TO SCALE

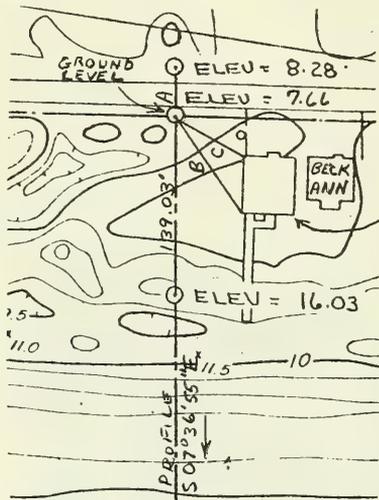

A = 38.97'
B = 91.82'
C = 85.00'

GREEN W/
WHITE TRIM
"HARE
NOSTRUM"
#949

0+00 ON PROFILE LINE
IS MIDDLE PIPE

BEACH

BASILINE
STATION 300+01.44 IS LOCATED
ABOUT 2.5 MILES WEST OF THE
HOLDEN BEACH FISHING PIER.

SKETCH

DA FORM 1959
1 OCT 64

REPLACES DA FORMS 1959
AND 1950, 1 FEB 57, WHICH
ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION

For use of this form, see TM 5-237; the proponent
agency is U.S. Continental Army Command.



Profile line 16. View toward east.




Profile line 16. View toward west.

COUNTRY U. S. A.		TYPE OF MARK GALV. PIPE		STATION 320 + 95.11 PROFILE 17	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 320 + 95.11		AGENCY (CAST IN MARKS) C. E.	
LATITUDE 33-54-23.836		LONGITUDE 78-20-43.420		DATUM NORTH AMERICA 1927	
(NORTHING)(EASTING) (FT.) 2198659.160		(EASTING)(NORTHING) (FT.) 57659.120		GRID AND ZONE N. C. LAMBERT	
(NORTHING)(EASTING) (M.)		(EASTING)(NORTHING) (M.)		DATE 1970	
				ORDER THIRD	

TO OBTAIN GRID AZIMUTH, ADD TO THE GEODETIC AZIMUTH
TO OBTAIN GRID AZ. (ADD)(SUB.) TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS) (FEET)	GRID DISTANCE (METERS) (FEET)

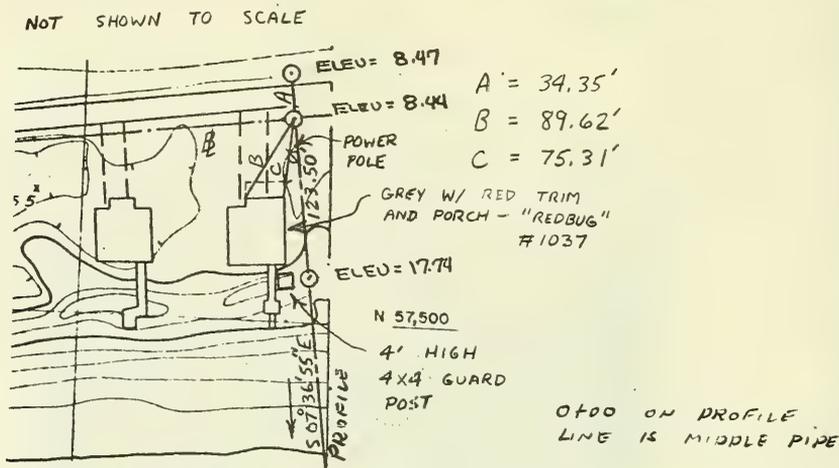

BEACH

BASILINE STATION 320 + 95.11 IS LOCATED ABOUT 2.9 MILES WEST OF THE HOLDEN BEACH FISHING PIER.

SKETCH

DA FORM 1959

REPLACES DA FORMS 1959 AND 1960, 1 FEB 57, WHICH ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION

For use of this form, see TM 5-237; the proponent agency is U.S. Continental Army Command.




Profile line 17. View toward east.



Profile line 17. View toward west.

COUNTRY U.S. A.	TYPE OF MARK GALV. PIPE	STATION 341+ 47.07	PROFILE 18
LOCALITY HOLDEN BEACH, N.C.	STAMPING ON MARK 341+ 47.07	AGENCY (CAST IN MARKS) C.E.	ELEVATION 8.80 (FT) (M)
LATITUDE 33-54-21.390	LONGITUDE 78-21-07.582	DATUM NORTH AMERICA 1927	DATUM 1929 (M.S.L.)
NORTHING(EASTING) 2196623.820 (FT) (M)	EASTING(NORTHING) 57398.500 (FT) (M)	GRID AND ZONE N.C. LAMBERT	ESTABLISHED BY (AGENCY) CERC
(NORTHING)(EASTING) (M)	(EASTING)(NORTHING) (M)	GRID AND ZONE	DATE 1970
TO OBTAIN		GRID AZIMUTH, ADD	TO THE GEODETIC AZIMUTH
TO OBTAIN		GRID AZ. (ADD)(SUB.)	TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS) (FEET)	GRID DISTANCE (METERS) (FEET)

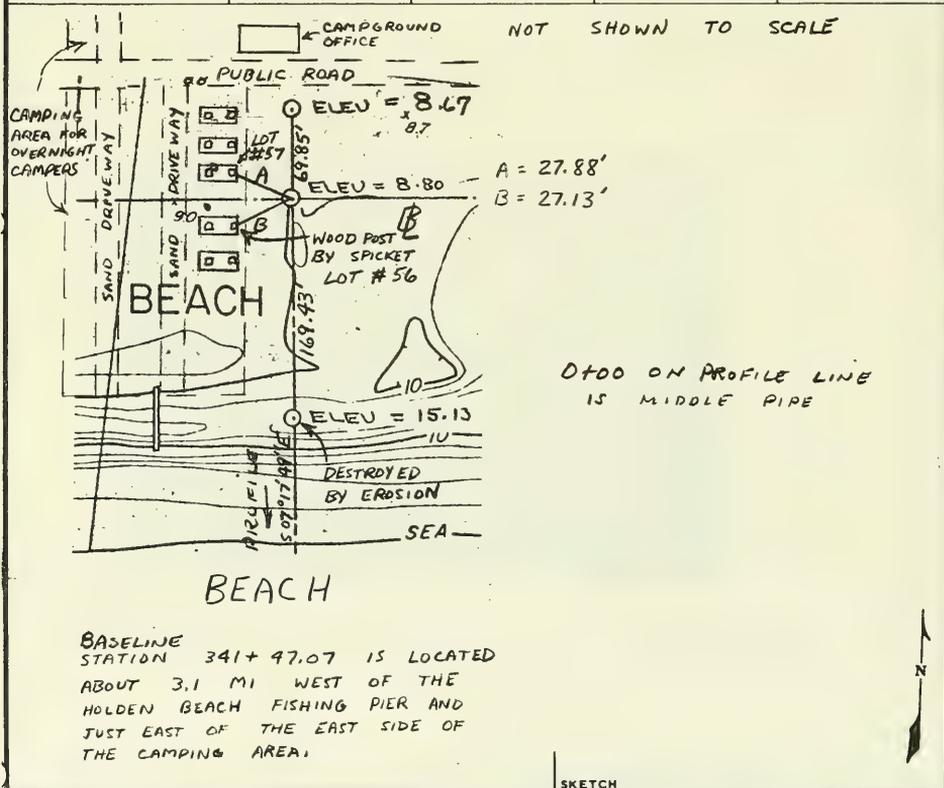



Profile line 18. View toward east.




Profile line 18. View toward west.

COUNTRY U. S. A.		TYPE OF MARK GALV. PIPE		STATION 360+02.07		PROFILE 19	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 360+02.07		AGENCY (CAST IN MARKS) C.E.		ELEVATION 10.24 (FT)	
LATITUDE 33-54-18.801		LONGITUDE 78-21-29.354		DATUM NORTH AMERICA 1927		DATUM 1929 (M.S.L.)	
(NORTHING)(EASTING) (FT) (M) 2194790.180 (M)		(EASTING)(NORTHING) (FT) (M) 57124.830 (M)		GRID AND ZONE N. C. LAMBERT		ESTABLISHED BY (AGENCY) CERC	
(NORTHING)(EASTING) (FT) (M)		(EASTING)(NORTHING) (FT) (M)		GRID AND ZONE		DATE 1970	
TO OBTAIN		GRID AZIMUTH, ADD				TO THE GEODETIC AZIMUTH	
TO OBTAIN		GRID AZ. (ADD)(SUB.)				TO THE GEODETIC AZIMUTH	

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS) (FEET)	GRID DISTANCE (METERS) (FEET)

NOT SHOWN TO SCALE

BLACK W/
RED TRIM

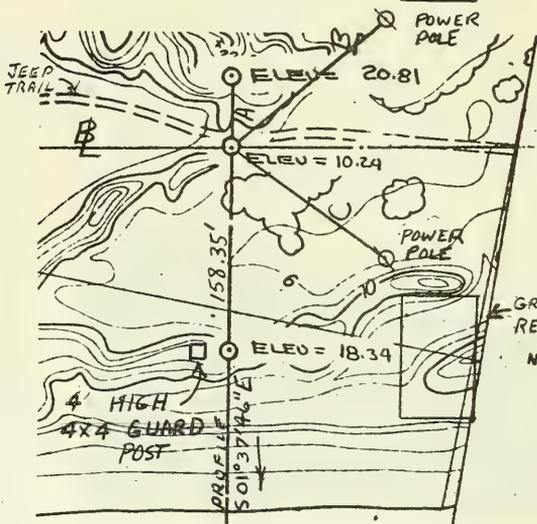

A = 55.79'
B = 127.57'
C = 119.00'

GREY W/
RED TRIM

0+00 ON PROFILE LINE
IS MIDDLE PIPE

BEACH

BASELINE
STATION 360+02.07 IS LOCATED ABOUT 3.5
MILES WEST OF THE HOLDEN BEACH FISHING PIER,
AND AT THE END OF THE PUBLIC ROAD, JUST
WEST OF THE LAST TWO HOUSES.

SKETCH

DA FORM 1959
1 OCT 64

REPLACES DA FORMS 1959
AND 1960, 1 FEB 57, WHICH
ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION
For use of this form, see TM 5-237; the proponent
agency is U.S. Continental Army Command.




Profile line 19. View toward east.



Profile line 19. View toward west.

COUNTRY U. S. A.		TYPE OF MARK GALV. PIPE		STATION 380+02.04 PROFILE 20	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 380+02.04		AGENCY (CAST IN MARKS) C.E.	
LATITUDE 33-54-14.937		LONGITUDE 78-21-52.621		ELEVATION 5.77 (FT) (M)	
NORTHING(EASTING) (FT) 2192831.270 (M)		EASTING(NORTHING) (FT) 56721.680 (M)		DATUM NORTH AMERICA 1927	
(NORTHING)(EASTING) (FT) (M)		(EASTING)(NORTHING) (FT) (M)		DATE 1970	
TO OBTAIN		GRID AZIMUTH, ADD		TO THE GEODETIC AZIMUTH	
TO OBTAIN		GRID AZ. (ADD)(SUB.)		TO THE GEODETIC AZIMUTH	
OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE (METERS)	GRID DISTANCE (METERS)	ORDER
			(FEET)	(FEET)	THIRD

NOT SHOWN TO SCALE

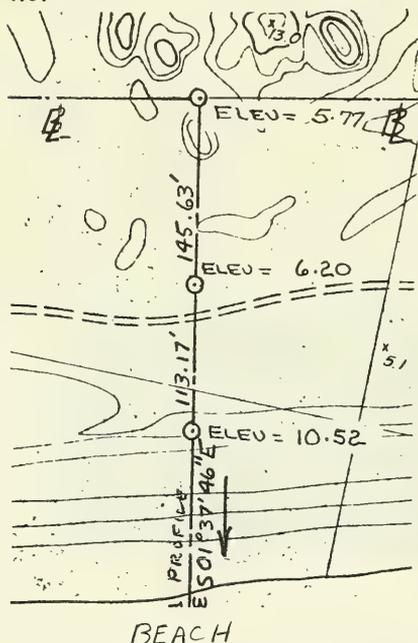

O+00 ON PROFILE LINE
IS NORTHERN MOST PIPE

NO PHYSICAL FEATURES TO TIE TO.
STATION 380+02.04 IS LOCATED ABOUT
2000 FEET WEST OF THE LAST TWO
HOUSES ON WEST END OF BEACH.

SKETCH

DA FORM 1959
1 OCT 64

REPLACES DA FORMS 1959
AND 1960, 1 FEB 57, WHICH
ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION
For use of this form, see TM 5-237; the proponent
agency is U.S. Continental Army Command.



Profile line 20. View toward east.




Profile line 20. View toward west.

COUNTRY U.S. A.		TYPE OF MARK GALV. PIPE		STATION 400+50.61		PROFILE 21	
LOCALITY HOLDEN BEACH, N.C.		STAMPING ON MARK 400+50.61		AGENCY (CAST IN MARKS) C.E.		ELEVATION 10.36 (FT) (M)	
LATITUDE 33-54-10.979		LONGITUDE 78-22-16.454		DATUM NORTH AMERICA 1927		DATUM 1929 (M.S.L.)	
NORTHING(EASTING) 2190824.750 (M)		NORTHING(EASTING) 56308.720 (M)		GRID AND ZONE N. C. LAMBERT		ESTABLISHED BY (AGENCY) CERC	
NORTHING(EASTING) (M)		NORTHING(EASTING) (M)		GRID AND ZONE (M)		DATE 1970	
						ORDER THIRD	

TO OBTAIN	GRID AZIMUTH, ADD	TO THE GEODETIC AZIMUTH
TO OBTAIN	GRID AZ. (ADD)(SUB.)	TO THE GEODETIC AZIMUTH

OBJECT	AZIMUTH OR DIRECTION (GEODETIC)(GRID) (MAGNETIC)	BACK AZIMUTH	GEOD. DISTANCE		GRID DISTANCE	
			(METERS)	(FEET)	(METERS)	(FEET)

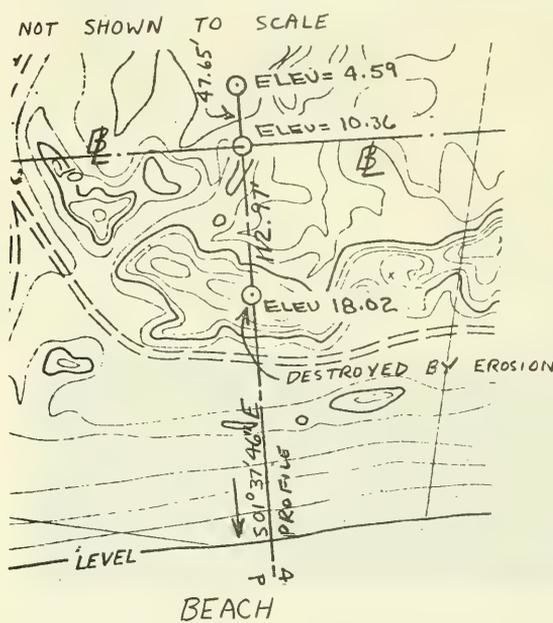

0+00 ON PROFILE LINE
IS MIDDLE PIPE

BASELINE STATION 400+50.61 IS LOCATED ABOUT 0.8 MILE WEST OF THE LAST TWO HOUSES ON HOLDEN BEACH, THERE ARE NO PHYSICAL FEATURES TO TIE TO.

SKETCH

DA FORM 1959
1 OCT 64

REPLACES DA FORMS 1959 AND 1960, 1 FEB 57, WHICH ARE OBSOLETE.

DESCRIPTION OR RECOVERY OF HORIZONTAL CONTROL STATION
For use of this form, see TM 5-237; the proponent agency is U.S. Continental Army Command.



Profile line 21. View toward east.



Profile line 21. View toward west across Shallotte Inlet.

APPENDIX B

BEACH PROFILE DATA

This appendix provides the edited beach profile data for each profile line measured during the study period from November 1970 to December 1974. The benchmark used for each profile line is indicated by the zero with positive distances in the seaward direction. The vertical measurements were referenced to the National Geodetic Vertical Datum of 1929. All distances and elevations are in feet.

The heading of each data column provides the year (yy), month (mm), and day (dd) of the measurement in the format yymmdd, as well as the survey number.

LINE 1

DATE SRVY 18	DATE SRVY 19	DATE SRVY 20	DATE SRVY 21	DATE SRVY 22	DATE SRVY 23	DATE SRVY 24	DATE SRVY 25
-68	-68	-68	-68	-68	-68	-68	-68
8.4	8.4	8.2	8.3	8.3	8.2	8.2	8.3
-59	-61	-53	-58	-57	-63	-62	-68
6.0	6.5	5.9	6.0	6.0	6.6	6.0	6.2
-55	-58	-68	-55	-55	-68	-33	-40
4.8	5.9	6.8	5.5	5.2	6.3	5.2	4.0
-41	-47	-40	4.8	0	4.9	0	-25
5.4	6.4	4.3	4.0	3.7	4.0	3.9	5.1
-30	-43	-39	0	0	0	2.8	0
6.6	5.5	4.3	2.0	2.5	3.0	5.0	4.2
-19	-19	-19	5.5	5.0	1.3	1.6	2.5
6.8	6.6	6.6	0.3	1.3	1.5	0.3	3.0
-13	-16	-16	7.5	7.5	7.5	7.5	5.0
8.0	8.2	8.0	10.0	10.0	10.0	10.0	10.0
7.1	7.2	7.2	10.0	10.0	10.0	10.0	10.0
0	0	0	1.1	1.1	1.1	1.1	1.1
7.1	6.7	5.0	6.1	6.1	6.1	6.1	6.1
6.9	6.8	6.8	6.1	6.1	6.1	6.1	6.1
36	36	76	77	75	75	75	75
3.8	2.8	1.2	1.1	1.2	1.2	1.2	1.2
8.0	8.0	1.2	1.2	1.2	1.2	1.2	1.2
2.8	1.0	-2.6	1.2	1.2	1.2	1.2	1.2
9.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
10.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
0.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
12.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
15.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
17.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
20.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
22.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
25.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
27.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
30.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
32.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
35.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
37.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
40.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
42.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
45.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
47.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
50.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
52.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
55.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
57.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
60.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
62.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
65.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
67.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
70.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
72.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
75.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
77.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
80.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
82.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
85.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
87.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
90.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
92.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
95.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
97.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
100.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
102.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
105.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
107.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
110.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
112.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
115.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
117.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
120.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
122.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
125.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
127.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
130.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
132.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
135.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
137.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
140.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
142.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
145.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
147.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
150.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
152.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
155.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
157.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
160.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
162.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
165.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
167.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
170.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
172.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
175.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
177.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
180.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
182.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
185.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
187.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
190.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
192.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
195.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
197.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
200.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
202.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
205.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
207.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
210.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
212.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
215.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
217.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
220.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
222.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
225.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
227.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
230.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
232.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
235.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
237.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
240.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
242.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
245.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
247.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
250.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
252.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
255.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
257.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
260.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
262.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
265.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
267.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
270.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
272.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
275.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
277.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
280.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2

LINE 1

DATE SRVY 26	DATE SRVY 27	DATE SRVY 28	DATE SRVY 29	DATE SRVY 30	DATE SRVY 31	DATE SRVY 32	DATE SRVY 33
-68	-68	-68	-68	-68	-68	-68	-68
8.3	8.3	9.0	9.4	9.5	8.5	9.4	9.6
-45	-49	-43	-51	-60	-64	-62	-68
4.0	3.1	4.5	7.1	8.6	5.9	6.6	6.8
0	4.1	4.0	5.5	4.6	4.5	5.4	5.7
2.0	3.9	4.0	4.5	2.9	4.3	5.4	4.5
5.0	3.9	4.0	1.8	2.2	0	5.2	2.6
7.5	3.9	2.8	2.7	2.1	4.1	4.1	4.8
1.1	1.9	1.0	2.5	1.8	2.1	2.5	2.9
10.0	7.5	1.0	1.6	1.4	3.5	2.6	7.5
11.4	1.8	1.6	2.5	1.4	5.0	1.8	10.0
-3.0	-2.4	-2.6	-2.6	-3.0	-1.4	-1.4	-2.1
12.5	-2.4	-2.6	-2.6	-3.0	2.0	2.0	12.5
15.0	-3.6	-4.4	-2.6	-3.0	2.0	2.0	15.0
17.5	-3.6	-4.4	-2.6	-3.0	2.0	2.0	17.5
20.0	-4.4	-4.4	-2.6	-3.0	2.0	2.0	20.0
22.5	-4.4	-4.4	-2.6	-3.0	2.0	2.0	22.5
25.0	-4.4	-4.4	-2.6	-3.0	2.0	2.0	25.0
27.5	-4.4	-4.4	-2.6	-3.0	2.0	2.0	27.5
30.0	-4.4	-4.4	-2.6	-3.0	2.0	2.0	30.0
32.5	-4.4	-4.4	-2.6	-3.0	2.0	2.0	32.5
35.0	-4.4	-4.4	-2.6	-3.0	2.0	2.0	35.0
37.5	-4.4	-4.4	-2.6	-3.0	2.0	2.0	37.5
40.0	-4.4	-4.4	-2.6	-3.0	2.0	2.0	40.0
42.5	-4.4	-4.4	-2.6	-3.0	2.0	2.0	42.5
45.0	-4.4	-4.4	-2.6	-3.0	2.0	2.0	45.0
47.5	-4.4	-4.4	-2.6	-3.0	2.0	2.0	47.5
50.0	-4.4	-4.4	-2.6	-3.0	2.0	2.0	50.0
52.5	-4.4	-4.4	-2.6	-3.0	2.0	2.0	52.5
55.0	-4.4	-4.4	-2.6	-3.0	2.0	2.0	55.0
57.5	-4.4	-4.4	-2.6	-3.0	2.0	2.0	57.5
60.0	-4.4	-4.4	-2.6	-3.0	2.0	2.0	60.0
62.5	-4.4	-4.4	-2.6	-3.0	2.0	2.0	62.5
65.0	-4.4	-4.4	-2.6	-3.0	2.0	2.0	65.0
67.5	-4.4	-4.4	-2.6	-3.0	2.0	2.0	67.5
70.0	-4.4	-4.4	-2.6	-3.0	2.0	2.0	70.0
72.5	-4.4	-4.4	-2.6	-3.0	2.0	2.0	72.5
75.0	-4.4	-4.4	-2.6	-3.0	2.0		

LINE 2

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 710809
10 | 710931
11 | 711006
12 | 711214
13 | 720103
14 | 720208
15 | 720317
16 | 720413
17 | 720515
18 | 720622
19 |
| 0 | 9.1 | 0 | 9.2 | 0 | 9.3 | 0 | 9.3 | 0 | 9.3 |
| 9.3 | 9.1 | 9.1 | 9.1 | 19 | 9.1 | 52 | 8.2 | 52 | 8.4 |
| 19 | 19 | 9.1 | 9.1 | 19 | 9.1 | 77 | 9.2 | 77 | 9.4 |
| 33 | 8.6 | 39 | 8.7 | 39 | 8.8 | 101 | 8.4 | 100 | 8.7 |
| 48 | 8.0 | 41 | 7.9 | 42 | 8.1 | 118 | 8.4 | 123 | 8.5 |
| 78 | 9.3 | 66 | 9.1 | 67 | 9.2 | 150 | 9.5 | 150 | 9.7 |
| 9.3 | 8.7 | 99 | 9.5 | 92 | 8.9 | 176 | 3.4 | 175 | 7.2 |
| 100 | 8.2 | 100 | 8.4 | 100 | 8.5 | 200 | 1.7 | 200 | 3.7 |
| 120 | 8.2 | 125 | 9.5 | 125 | 9.0 | 220 | 0.0 | 220 | 3.7 |
| 139 | 8.5 | 125 | 9.5 | 125 | 9.0 | 250 | 0.0 | 250 | 1.0 |
| 151 | 9.4 | 151 | 9.7 | 155 | 9.7 | 250 | 0.0 | 250 | 1.0 |
| 155 | 8.2 | 159 | 6.4 | 155 | 7.2 | 275 | 0.0 | 275 | 1.5 |
| 173 | 18.4 | 179 | 5.6 | 162 | 6.4 | 300 | 0.0 | 300 | 0.2 |
| 200 | 2.0 | 200 | 3.4 | 197 | 2.9 | 325 | 0.0 | 325 | 0.2 |
| 225 | 2.9 | 225 | 2.3 | 200 | 2.5 | 350 | 0.0 | 350 | 0.2 |
| 250 | 2.7 | 250 | 1.4 | 225 | 1.3 | 375 | 0.0 | 375 | 0.2 |
| 275 | 0.8 | 275 | 0.6 | 250 | 0.4 | 400 | 0.0 | 400 | 0.2 |
| 300 | 1.1 | 300 | 0.6 | 275 | 0.3 | 400 | 0.0 | 400 | 0.2 |
| 315 | 0.5 | 325 | 0.6 | 300 | 0.9 | 400 | 0.0 | 400 | 0.2 |
| 350 | 0.1 | 350 | 0.6 | 325 | 0.9 | 400 | 0.0 | 400 | 0.2 |
| 375 | 0.7 | 375 | 0.9 | 350 | 0.9 | 400 | 0.0 | 400 | 0.2 |
| 400 | 1.4 | 400 | 0.0 | 400 | 0.0 | 400 | 0.0 | 400 | 0.2 |
| 425 | 0.2 | 425 | 0.6 | 400 | 0.0 | 400 | 0.0 | 400 | 0.2 |
| 450 | 0.5 | 450 | 0.5 | 400 | 0.0 | 400 | 0.0 | 400 | 0.2 |

LINE 2

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 720609
18 | 720622
19 | 720805
20 | 720929
21 | 721211
22 | 730115
23 | 730215
24 | 730315
25 | 730415
26 | 730515
27 |
| 51 | 52 | 6.4 | 6.4 | 52 | 6.6 | 52 | 8.5 | 52 | 8.4 |
| 9.2 | 77 | 9.4 | 9.2 | 77 | 9.4 | 77 | 9.3 | 77 | 9.4 |
| 100 | 100 | 6.7 | 100 | 100 | 8.3 | 100 | 8.5 | 100 | 8.8 |
| 125 | 114 | 8.2 | 110 | 110 | 9.5 | 113 | 8.1 | 111 | 8.2 |
| 140 | 134 | 4.0 | 138 | 136 | 7.3 | 132 | 8.8 | 136 | 8.5 |
| 175 | 182 | 2.0 | 170 | 170 | 6.8 | 170 | 8.2 | 170 | 5.1 |
| 200 | 200 | 1.9 | 200 | 200 | 5.4 | 200 | 8.2 | 200 | 5.1 |
| 225 | 200 | 1.9 | 225 | 200 | 5.0 | 225 | 2.7 | 225 | 2.7 |
| 250 | 1.4 | 208 | 5.2 | 240 | 2.3 | 250 | 1.6 | 250 | 1.4 |
| 250 | 5.1 | 250 | 5.6 | 270 | 1.1 | 275 | 0.6 | 275 | 0.5 |
| 275 | 0.7 | 255 | 5.9 | 300 | 0.2 | 300 | 0.0 | 300 | 0.5 |
| 300 | 1.0 | 278 | 3.9 | 325 | 0.0 | 330 | 0.6 | 325 | 0.3 |
| 325 | 1.9 | 300 | 2.5 | 350 | 0.2 | 350 | 0.3 | 350 | 0.2 |
| 350 | 0.5 | 325 | 3.5 | 375 | 0.1 | 375 | 0.3 | 375 | 0.2 |
| 375 | 0.7 | 350 | 0.1 | 400 | 0.0 | 400 | 0.2 | 400 | 0.2 |
| 400 | 0.2 | 400 | 0.5 | 400 | 0.0 | 400 | 0.0 | 400 | 0.2 |
| 425 | 0.2 | 425 | 0.5 | 400 | 0.0 | 400 | 0.0 | 400 | 0.2 |
| 450 | 0.5 | 450 | 0.5 | 400 | 0.0 | 400 | 0.0 | 400 | 0.2 |

LINE 2

DATE SRVY	730328 20	DATE SRVY	730413 27	DATE SRVY	730614 28	DATE SRVY	730712 29	DATE SRVY	730809 30	DATE SRVY	731008 31	DATE SRVY	731205 32	DATE SRVY	740107 33
52	8.4	52	8.6	52	8.5	52	8.5	52	8.5	52	8.5	52	8.7	52	8.6
77	9.2	77	9.2	77	9.1	77	9.1	77	9.2	77	9.2	77	9.1	77	9.4
100	8.0	100	8.6	100	8.9	100	8.7	100	8.9	100	8.6	100	8.9	100	8.9
112	8.3	125	8.3	125	8.2	125	8.1	125	8.0	125	8.1	125	8.7	125	8.3
136	8.3	136	8.6	136	8.6	136	8.4	150	8.7	134	8.6	150	8.5	137	8.6
160	8.6	148	7.3	148	7.1	150	6.8	175	4.2	144	7.2	152	6.0	134	8.3
183	5.0	173	4.9	173	4.5	175	4.9	500	2.3	156	5.1	161	8.5	200	5.8
200	4.0	200	3.1	200	2.9	500	3.3	525	1.0	200	5.0	200	6.2	225	4.3
228	2.8	225	2.0	225	2.1	225	2.1	275	.75	215	6.0	225	3.9	250	2.4
259	1.5	275	1.5	275	1.6	275	1.6	300	.19	225	3.0	275	1.6	280	1.0
300	.9	300	.4	300	.4	300	.4	325	.312	250	3.0	275	1.6	300	.7
328	.7	325	.7	325	.76	325	.76	300	.A	275	2.0	300	.7	325	.22
350	.11	350	.13	350	.13	350	.13	350	.A	300	.A	325	.6	150	.31
375	.16	375	.16	375	.16	375	.16	350	.9	350	.9	375	.219	375	.17
400	.212	400	.317	400	.317	400	.317	400	.A	400	.A	400	.2.9	400	.2.9
425	.217														

LINE 2

DATE SRVY	740204 34	DATE SRVY	740304 35	DATE SRVY	740401 36	DATE SRVY	740530 37	DATE SRVY	740816 38	DATE SRVY	740930 39	DATE SRVY	741203 40
52	8.6	52	8.0	52	8.5	52	8.6	0	9.5	0	9.2	0	9.3
77	9.3	77	9.3	77	9.1	77	9.2	0	9.1	20	9.2	0	9.3
100	8.7	100	8.7	100	8.6	100	8.9	20	9.3	45	8.9	30	9.0
125	8.2	125	8.0	125	8.0	125	8.2	30	9.1	70	9.4	55	9.1
134	8.6	150	8.6	148	8.4	150	7.8	52	9.0	95	9.1	78	9.5
155	6.4	160	6.1	162	5.7	168	5.7	75	9.5	100	8.9	100	8.8
190	6.5	183	3.4	183	4.9	192	3.4	100	8.9	125	8.3	125	8.4
200	5.2	200	2.7	200	2.9	200	2.7	125	8.4	135	8.5	148	8.4
225	2.2	225	1.2	225	1.2	225	1.6	133	6.7	150	7.1	171	8.0
250	1.0	250	.5	240	.5	250	1.1	168	7.2	175	7.8	200	8.7
275	.13	275	.66	275	.11	275	.15	175	7.8	200	8.7	203	8.6
300	.11	300	.14	300	.09	300	.00	200	6.8	225	8.9	207	7.7
325	.24	325	.16	325	.15	325	.14	225	10.2	250	10.8	250	2.6
350	.15	350	.15	350	.14	350	.16	250	11.0	250	10.8	250	2.6
375	.16	375	.16	375	.15	375	.16	300	8.9	275	10.7	260	1.2
400	.214	400	.214	400	.213	425	.213	325	1.2	275	2.7	275	1.7
425	.217							350	1.2	300	2.7	300	1.7
								350	0.0	325	2.7	325	1.1
								400	.7	350	.4	350	.8
								400	.166	375	.8	375	.2.6
								425	.2.4	400	.1.8	400	.3.6
								450	.3.3	425	.2.4	450	.3.6

LINE 3

DATE 740204 SRVY 34	DATE 740304 SRVY 35	DATE 740401 SRVY 36	DATE 740530 SRVY 37	DATE 740816 SRVY 38	DATE 740930 SRVY 39	DATE 741203 SRVY 40
112. 13.0	112. 13.3	112. 13.1	112. 13.2	112. 13.3	112. 13.2	112. 13.2
117. 12.5	117. 12.9	117. 12.9	117. 13.0	117. 13.0	117. 13.0	117. 13.1
125. 6.9	125. 6.9	125. 6.9	125. 6.9	125. 6.9	125. 6.9	125. 6.9
131. 6.2	131. 6.2	131. 6.2	131. 6.2	131. 6.2	131. 6.2	131. 6.2
143. 6.9	143. 6.9	143. 6.9	143. 6.9	143. 6.9	143. 6.9	143. 6.9
166. 7.2	166. 7.2	166. 7.2	166. 7.2	166. 7.2	166. 7.2	166. 7.2
200. 7.2	200. 7.2	200. 7.2	200. 7.2	200. 7.2	200. 7.2	200. 7.2
212. 5.5	212. 5.4	212. 5.4	212. 5.4	212. 5.4	212. 5.4	212. 5.4
234. 5.4	234. 4.6	234. 4.6	234. 4.6	234. 4.6	234. 4.6	234. 4.6
268. 1.8	268. 4.0	268. 4.0	268. 4.0	268. 4.0	268. 4.0	268. 4.0
300. 6.6	300. 2.0	300. 1.7	300. 1.7	300. 1.7	300. 1.7	300. 1.7
325. 4.2	325. 4.3	325. 4.5	325. 4.4	325. 4.3	325. 4.5	325. 4.5
350. 1.5	350. 3.0	350. 3.5	350. 3.5	350. 3.5	350. 3.5	350. 3.5
375. 2.6	375. 2.7	375. 2.8	375. 2.8	375. 2.8	375. 2.8	375. 2.6

LINE 4

DATE 701113 SRVY 2	DATE 701214 SRVY 3	DATE 710114 SRVY 4	DATE 710209 SRVY 5	DATE 710309 SRVY 6	DATE 710404 SRVY 7	DATE 710510 SRVY 8	DATE 710607 SRVY 9
191. 10.1	191. 10.0	191. 10.0	191. 10.1	191. 10.0	191. 10.0	191. 9.9	191. 9.9
192. 3.0	192. 5.5	192. 4.6	192. 4.2	192. 3.4	192. 4.0	192. 4.5	192. 4.9
200. 2.4	200. 4.4	200. 3.7	200. 3.6	200. 2.7	200. 3.3	200. 3.4	200. 4.3
225. 1.3	225. 1.2	225. 1.2	225. 1.7	225. 1.0	225. 1.2	225. 1.7	225. 1.7
250. 1.6	250. 1.5	250. 1.8	250. 1.6	250. 1.1	250. 1.4	250. 1.0	250. 1.0
275. 4.8	275. 4.8	275. 4.1	275. 4.1	275. 4.1	275. 4.2	275. 4.0	275. 4.0
300. 1.0	300. 1.0	300. 1.0	300. 1.0	300. 1.0	300. 1.0	300. 1.0	300. 1.0
325. 1.1	325. 1.1	325. 1.1	325. 1.1	325. 1.1	325. 1.1	325. 1.1	325. 1.1
350. 1.0	350. 1.0	350. 1.0	350. 1.0	350. 1.0	350. 1.0	350. 1.0	350. 1.0
375. 1.0	375. 1.0	375. 1.0	375. 1.0	375. 1.0	375. 1.0	375. 1.0	375. 1.0
400. 2.2	400. 2.0	400. 2.0	400. 2.0	400. 2.0	400. 2.0	400. 2.0	400. 2.0
425. 3.4	425. 2.9	425. 3.0	425. 2.8	425. 3.6	425. 3.4	425. 2.6	425. 4.0

LINE 4

DATE 710809 SRVY 10	DATE 710831 SRVY 11	DATE 711006 SRVY 12	DATE 711214 SRVY 13	DATE 720103 SRVY 14	DATE 720208 SRVY 15	DATE 720317 SRVY 16	DATE 720413 SRVY 17
191. 10.2	191. 10.2	191. 10.1	191. 10.2	191. 10.2	191. 10.1	191. 10.2	191. 10.1
192. 6.1	192. 5.5	192. 3.5	193. 4.1	193. 4.3	192. 4.9	192. 3.7	192. 3.5
200. 4.8	200. 4.8	200. 2.8	200. 3.6	200. 3.5	200. 4.2	200. 2.9	200. 2.8
225. 1.7	225. 2.7	225. 1.2	225. 2.3	225. 2.0	225. 2.5	225. 1.4	225. 1.8
250. 0.7	250. 1.0	250. 0.3	250. 1.0	250. 1.1	250. 1.6	250. 0.5	250. 0.2
275. 0.1	275. 0.6	275. 0.6	275. 0.7	275. 0.4	275. 0.9	275. 0.5	275. 0.2
300. 0.1	300. 0.5	300. 0.2	300. 0.5	300. 0.4	300. 0.7	300. 0.5	300. 0.1
325. 0.8	325. 0.7	325. 0.2	325. 0.5	325. 0.6	325. 0.7	325. 0.5	325. 0.8
350. 1.7	350. 2.1	350. 1.3	350. 1.2	350. 1.1	350. 1.2	350. 1.0	350. 0.7
375. 2.6	375. 3.8	375. 2.2	375. 2.3	375. 1.6	375. 1.6	375. 1.6	375. 2.4
400. 2.2	400. 3.8	400. 3.4	400. 3.7	400. 2.2	400. 2.2	425. 2.5	425. 2.7
				411. 2.6	411. 2.6	450. 3.3	450. 3.4
				418. 2.6		475. 3.6	

LINE 4

DATE 720609 SRVY 18	DATE 720625 SRVY 19	DATE 720805 SRVY 20	DATE 720929 SRVY 21	DATE 721211 SRVY 22	DATE 730115 SRVY 23	DATE 730215 SRVY 24	DATE 730315 SRVY 25
191. 10.1	191. 10.2	191. 10.2	191. 10.2	191. 10.1	191. 10.2	191. 10.2	191. 10.2
192. 10.1	192. 5.8	192. 6.8	192. 10.2	194. 5.0	193. 4.1	193. 4.6	192. 4.8
193. 5.0	200. 5.0	200. 5.4	193. 6.9	200. 4.4	200. 3.2	200. 3.8	200. 4.1
200. 4.0	225. 3.1	225. 3.4	207. 6.7	225. 2.5	225. 1.4	225. 2.1	225. 2.2
225. 2.7	250. 1.9	250. 2.0	232. 3.2	250. 1.6	250. 0.6	250. 1.0	250. 1.0
250. 0.9	275. 0.9	275. 0.4	254. 1.8	275. 0.7	275. 0.0	275. 0.2	275. 0.8
275. 1.3	300. 0.3	300. 1.0	279. 0.9	300. 0.0	300. 0.3	300. 0.5	300. 0.1
300. 0.7	325. 0.6	325. 1.5	300. 0.3	325. 0.4	325. 0.6	325. 0.5	325. 0.1
325. 0.1	350. 0.1	350. 1.5	325. 0.6	350. 1.1	350. 1.0	350. 1.4	350. 1.3
350. 1.2	375. 0.1	375. 1.1	350. 0.8	375. 0.1	375. 1.6	375. 1.9	375. 1.0
375. 1.9	400. 0.5	400. 1.5	375. 1.3	400. 0.9	400. 2.4	400. 2.2	400. 2.0
400. 2.4	425. 0.5	425. 2.1	400. 1.9	425. 0.4	425. 0.3	425. 0.5	425. 0.6
		450. 2.8	425. 2.5	450. 3.2	450. 3.5	450. 3.0	450. 2.8

LINE 4

DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	
730328 26	730413 27	730614 28	730712 29	730809 30	731008 31	731205 32	740107 33	
191. 192. 193. 200. 250. 285. 295. 300. 305. 325. 350. 375. 400.	191. 192. 193. 200. 250. 285. 295. 300. 305. 325. 350. 375. 400.	10.1 3.1 2.7 2.2 2.2 2.5 2.4 2.5 2.7 2.7 2.9 3.1 3.4	10.2 5.4 6.1 4.4 2.5 2.5 2.5 3.0 3.0 3.2 3.5 3.7 4.0	10.3 192. 200. 225. 250. 275. 300. 325. 350. 375. 400.	10.2 5.4 4.6 3.1 2.2 2.2 1.8 1.2 1.2 1.4 1.6 1.8 2.1	191. 192. 200. 225. 250. 275. 300. 325. 350. 375. 400.	10.2 6.8 5.6 3.8 2.6 2.6 1.7 1.7 1.7 1.8 2.1 2.3 2.7 3.1	191. 192. 200. 225. 250. 275. 300. 325. 350. 375. 400.

LINE 4

DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY
740204 34	740304 35	740401 36	740530 37	740816 38	740910 39	741203 40	
191. 192. 193. 200. 225. 250. 275. 300. 325. 350. 375. 400.	191. 192. 193. 200. 225. 250. 275. 300. 325. 350. 375. 400.	10.4 5.2 4.4 2.6 1.4 1.4 1.7 2.2 2.2 2.7 3.0 3.2 3.6	10.2 4.9 4.2 2.7 1.6 1.1 1.1 1.6 1.6 1.8 2.1 2.4 2.8	191. 192. 193. 200. 225. 250. 275. 300. 325. 350. 375. 400.	191. 192. 193. 200. 225. 250. 275. 300. 325. 350. 375. 400.	10.2 10.2 4.5 3.6 1.9 1.9 1.3 1.2 1.5 1.7 2.1 2.4 2.7	

LINE 5

DATE SRVY	701214 SRVY	701114 SRVY	710909 SRVY	710309 SRVY	710408 SRVY	710510 SRVY	710607 SRVY
187	187	187	187	187	187	187	187
15.1	15.2	15.2	15.1	15.0	15.1	15.2	15.4
196	200	200	200	200	199	196	196
15.4	15.3	15.3	15.2	15.1	15.1	15.2	15.1
218	206	206	216	216	209	205	205
5.6	6.4	6.4	7.3	5.6	5.8	10.2	7.5
241	223	214	225	225	225	211	210
2.1	2.1	2.1	2.5	4.9	4.5	5.3	5.6
285	270	270	285	285	280	225	225
4.9	4.9	4.9	5.1	25.0	2.5	4.1	4.8
300	290	290	275	275	275	250	250
1.9	1.8	1.8	1.7	1.3	1.4	1.4	1.4
300	300	300	300	300	300	275	275
1.4	1.1	1.1	0.0	1.4	0.6	1.3	1.1
325	325	325	325	325	325	325	325
1.4	1.1	1.1	0.0	1.4	0.6	1.3	1.1
350	350	350	350	350	350	350	350
1.4	1.1	1.1	0.0	1.4	0.6	1.3	1.1
375	375	375	375	375	375	375	375
1.4	1.1	1.1	0.0	1.4	0.6	1.3	1.1
400	400	400	400	400	400	400	400
1.4	1.1	1.1	0.0	1.4	0.6	1.3	1.1
425	425	425	425	425	425	425	425
1.4	1.1	1.1	0.0	1.4	0.6	1.3	1.1
450	450	450	450	450	450	450	450
1.4	1.1	1.1	0.0	1.4	0.6	1.3	1.1
475	475	475	475	475	475	475	475
1.4	1.1	1.1	0.0	1.4	0.6	1.3	1.1

LINE 5

DATE SRVY	710909 SRVY	710317 SRVY	720317 SRVY	720208 SRVY	720103 SRVY	720208 SRVY	720413 SRVY
187	187	187	187	187	187	187	187
15.3	15.2	15.2	15.4	15.6	15.6	15.6	16.2
196	195	195	197	197	197	197	193
10.1	10.1	10.1	10.4	10.4	10.4	10.4	10.2
209	215	215	208	208	208	210	210
5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1
518	520	520	518	518	518	518	518
2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
253	245	245	253	253	253	253	253
5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1
249	249	249	249	249	249	249	249
4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3
325	325	325	325	325	325	325	325
1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
300	300	300	300	300	300	300	300
1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
350	350	350	350	350	350	350	350
1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
375	375	375	375	375	375	375	375
1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
400	400	400	400	400	400	400	400
1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
425	425	425	425	425	425	425	425
1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
450	450	450	450	450	450	450	450
1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
475	475	475	475	475	475	475	475
1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4

LINE 5

DATE SRVY	DATE 720609 SRVY 18	DATE 720625 SRVY 19	DATE 720805 SRVY 20	DATE 720929 SRVY 21	DATE 721211 SRVY 22	DATE 730115 SRVY 23	DATE 730215 SRVY 24	DATE 730315 SRVY 25
187	187	187	187	187	187	187	187	187
16.2	16.2	16.4	16.4	16.4	16.3	16.7	16.6	16.3
192	192	192	192	192	192	192	192	192
15.0	15.0	15.9	15.9	15.9	15.9	16.0	16.0	15.9
6.4	6.4	6.6	6.6	6.4	7.9	9.2	6.8	6.8
229	229	233	233	208	225	225	231	233
4.2	4.2	3.9	3.9	6.4	5.4	5.2	4.5	5.1
250	250	250	250	228	250	250	258	254
1.9	1.9	1.1	1.1	231	1.9	1.4	2.9	4.5
247	247	275	275	231	275	278	273	283
7.8	7.8	7.7	7.7	5.5	7.9	1.4	7.3	7.0
300	300	300	300	255	300	300	300	300
7	7	7	7	278	7	7	7	7
325	325	325	325	325	325	325	325	325
6	6	6	6	1.4	6	6	6	6
350	350	350	350	300	350	350	350	350
3	3	3	3	1.1	3	3	3	3
375	375	375	375	325	375	375	375	375
0.0	0.0	0.0	0.0	1.7	0.0	0.6	0.9	0.3
400	400	400	400	350	400	400	400	400
-5	-5	-5	-5	0.0	4.0	1.6	1.2	1.5
423	423	425	425	375	425	428	428	428
-1.4	-1.4	-1.5	-1.5	6.5	1.6	1.7	1.6	1.2
450	450	450	450	425	450	450	450	450
2.3	2.3	2.6	2.6	3.3	2.9	2.6	2.0	2.0
475	475	475	475	450	475	475	475	475
42.6	42.6	42.6	42.6	450	45.0	45.0	45.0	45.0

LINE 5

DATE SRVY	DATE 730328 SRVY 26	DATE 730413 SRVY 27	DATE 730614 SRVY 28	DATE 730712 SRVY 29	DATE 730809 SRVY 30	DATE 731009 SRVY 31	DATE 731205 SRVY 32	DATE 740107 SRVY 33
187	187	187	187	187	187	187	187	187
16.3	16.3	16.5	16.6	16.4	16.4	16.4	16.6	16.3
191	191	192	192	190	190	190	190	192
5.9	5.9	6.1	6.4	6.4	6.9	6.9	6.8	7.8
522	522	522	522	525	525	525	525	525
3.3	3.3	2.8	3.0	2.9	3.6	3.6	3.5	3.0
560	560	560	560	522	560	560	560	560
2.75	2.75	1.6	1.8	1.8	2.3	2.3	2.4	2.4
2	2	2	2	2	2	2	2	2
300	300	300	300	300	300	300	300	300
1.1	1.1	1.0	1.0	1.0	1.0	1.0	1.0	1.0
325	325	325	325	325	325	325	325	325
4	4	3	3	3	3	3	3	3
350	350	350	350	350	350	350	350	350
0.1	0.1	0.3	0.7	0.1	0.2	0.2	0.6	0.5
400	400	400	400	375	400	400	400	400
-8	-8	-5	-5	1.9	4.0	1.0	1.6	1.6
405	405	405	405	400	405	405	405	405
1.2	1.2	1.7	1.6	4.0	1.2	1.2	1.2	1.2
425	425	425	425	425	425	425	425	425
-1.6	-1.6	-2.6	-2.9	3.3	4.2	0.0	3.0	2.9
450	450	450	450	450	450	450	450	450
-2.9	-2.9	-2.6	-2.9	4.2	4.2	4.2	4.2	4.2
475	475	475	475	475	475	475	475	475
-2.9	-2.9	-2.6	-2.9	450	45.0	45.0	45.0	45.0

LINE 5

DATE 740284 SRVY 34	DATE 740304 SRVY 35	DATE 740401 SRVY 36	DATE 740530 SRVY 37	DATE 740816 SRVY 38	DATE 740830 SRVY 39	DATE 741203 SRVY 40
187. 16.9	187. 16.4	187. 16.3	187. 16.3	187. 16.3	187. 15.9	187. 16.4
191. 17.6	191. 18.4	191. 18.3	191. 18.3	191. 18.3	191. 19.3	191. 17.3
205. 17.6	205. 17.6	205. 17.6	205. 17.6	205. 17.6	205. 17.6	205. 17.6
214. 7.0	214. 7.0	214. 7.0	214. 7.0	214. 7.0	214. 7.0	214. 7.0
250. 4.1	250. 4.1	250. 4.1	250. 4.1	250. 4.1	250. 4.1	250. 4.1
275. 2.0	275. 2.0	275. 2.0	275. 2.0	275. 2.0	275. 2.0	275. 2.0
300. 1.1	300. 1.1	300. 1.1	300. 1.1	300. 1.1	300. 1.1	300. 1.1
325. .3	325. .3	325. .3	325. .3	325. .3	325. .3	325. .3
350. .5	350. .5	350. .5	350. .5	350. .5	350. .5	350. .5
375. 11.0	375. 11.0	375. 11.0	375. 11.0	375. 11.0	375. 11.0	375. 11.0
400. 11.4	400. 11.4	400. 11.4	400. 11.4	400. 11.4	400. 11.4	400. 11.4
425. 11.7	425. 11.7	425. 11.7	425. 11.7	425. 11.7	425. 11.7	425. 11.7
450. 11.7	450. 11.7	450. 11.7	450. 11.7	450. 11.7	450. 11.7	450. 11.7
475. 11.7	475. 11.7	475. 11.7	475. 11.7	475. 11.7	475. 11.7	475. 11.7
500. 11.7	500. 11.7	500. 11.7	500. 11.7	500. 11.7	500. 11.7	500. 11.7

LINE 6

DATE 701113 SRVY 2	DATE 701214 SRVY 3	DATE 710114 SRVY 4	DATE 710209 SRVY 5	DATE 710309 SRVY 6	DATE 710408 SRVY 7	DATE 710510 SRVY 8	DATE 710607 SRVY 9
188. 15.5	188. 15.5	188. 15.5	188. 15.6	188. 15.6	188. 15.4	188. 15.5	188. 15.5
200. 12.9	200. 12.9	200. 12.9	200. 12.9	200. 12.9	200. 12.2	200. 12.9	200. 12.9
207. 11.5	207. 11.5	207. 11.5	207. 11.5	207. 11.5	207. 10.9	207. 11.5	207. 11.5
224. 10.8	224. 10.8	224. 10.8	224. 10.8	224. 10.8	224. 10.7	224. 10.8	224. 10.8
227. 6.6	227. 6.6	227. 6.6	227. 6.6	227. 6.6	227. 6.5	227. 6.6	227. 6.6
273. 2.3	273. 2.3	273. 2.3	273. 2.3	273. 2.3	273. 2.3	273. 2.3	273. 2.3
300. 1.5	300. 1.5	300. 1.5	300. 1.5	300. 1.5	300. 1.5	300. 1.5	300. 1.5
325. 1.6	325. 1.6	325. 1.6	325. 1.6	325. 1.6	325. 1.6	325. 1.6	325. 1.6
350. .4	350. .4	350. .4	350. .4	350. .4	350. .4	350. .4	350. .4
375. .4	375. .4	375. .4	375. .4	375. .4	375. .4	375. .4	375. .4
400. .2	400. .2	400. .2	400. .2	400. .2	400. .2	400. .2	400. .2
425. .6	425. .6	425. .6	425. .6	425. .6	425. .6	425. .6	425. .6
450. 11.3	450. 11.3	450. 11.3	450. 11.3	450. 11.3	450. 11.3	450. 11.3	450. 11.3
475. 11.3	475. 11.3	475. 11.3	475. 11.3	475. 11.3	475. 11.3	475. 11.3	475. 11.3
500. 11.3	500. 11.3	500. 11.3	500. 11.3	500. 11.3	500. 11.3	500. 11.3	500. 11.3

LINE 6

DATE SRVY	710328 26	DATE SRVY	730413 27	DATE SRVY	730614 28	DATE SRVY	730712 29	DATE SRVY	730809 30	DATE SRVY	731008 31	DATE SRVY	731205 32	DATE SRVY	740107 33
188	15.8	188	15.8	188	15.8	188	15.8	188	15.8	188	15.9	188	15.9	188	15.9
198	14.9	198	14.8	198	14.8	198	14.8	198	15.4	198	15.9	198	15.9	198	15.9
200	12.7	200	12.8	200	12.8	200	12.8	200	15.5	200	12.9	200	12.9	200	12.9
210	12.4	210	12.5	210	12.5	210	12.5	210	12.8	210	12.8	210	12.8	210	12.8
215	12.1	215	12.7	215	6.7	215	7.1	215	12.5	215	10.3	215	10.3	215	10.3
220	7.8	220	10.3	220	2.5	220	5.8	220	7.0	220	6.1	220	6.1	220	6.1
225	4.7	225	7.8	225	3.3	225	6.2	225	6.1	225	6.4	225	6.4	225	6.4
230	2.8	230	4.3	230	2.3	230	3.4	230	6.1	230	6.4	230	6.4	230	6.4
240	4.7	240	4.3	240	3.0	240	2.5	240	5.9	240	2.6	240	2.6	240	2.6
250	1.5	250	1.8	250	3.25	250	2.5	250	4.5	250	2.6	250	2.6	250	2.6
260	0.5	260	1.4	260	0.5	260	0.5	260	3.9	260	1.8	260	1.8	260	1.8
270	0.5	270	1.4	270	0.5	270	0.5	270	3.9	270	1.8	270	1.8	270	1.8
280	0.5	280	1.4	280	0.5	280	0.5	280	3.9	280	1.8	280	1.8	280	1.8
290	0.6	290	0.6	290	0.6	290	0.6	290	1.1	290	0.9	290	0.9	290	0.9
300	0.6	300	0.6	300	0.6	300	0.6	300	1.1	300	0.9	300	0.9	300	0.9
310	0.6	310	0.6	310	0.6	310	0.6	310	1.1	310	0.9	310	0.9	310	0.9
320	0.6	320	0.6	320	0.6	320	0.6	320	1.1	320	0.9	320	0.9	320	0.9
330	0.6	330	0.6	330	0.6	330	0.6	330	1.1	330	0.9	330	0.9	330	0.9
340	0.6	340	0.6	340	0.6	340	0.6	340	1.1	340	0.9	340	0.9	340	0.9
350	0.6	350	0.6	350	0.6	350	0.6	350	1.1	350	0.9	350	0.9	350	0.9
360	0.6	360	0.6	360	0.6	360	0.6	360	1.1	360	0.9	360	0.9	360	0.9
370	0.6	370	0.6	370	0.6	370	0.6	370	1.1	370	0.9	370	0.9	370	0.9
380	0.6	380	0.6	380	0.6	380	0.6	380	1.1	380	0.9	380	0.9	380	0.9
390	0.6	390	0.6	390	0.6	390	0.6	390	1.1	390	0.9	390	0.9	390	0.9
400	0.6	400	0.6	400	0.6	400	0.6	400	1.1	400	0.9	400	0.9	400	0.9
410	0.6	410	0.6	410	0.6	410	0.6	410	1.1	410	0.9	410	0.9	410	0.9
420	0.6	420	0.6	420	0.6	420	0.6	420	1.1	420	0.9	420	0.9	420	0.9
430	0.6	430	0.6	430	0.6	430	0.6	430	1.1	430	0.9	430	0.9	430	0.9
440	0.6	440	0.6	440	0.6	440	0.6	440	1.1	440	0.9	440	0.9	440	0.9
450	0.6	450	0.6	450	0.6	450	0.6	450	1.1	450	0.9	450	0.9	450	0.9
460	0.6	460	0.6	460	0.6	460	0.6	460	1.1	460	0.9	460	0.9	460	0.9
470	0.6	470	0.6	470	0.6	470	0.6	470	1.1	470	0.9	470	0.9	470	0.9
480	0.6	480	0.6	480	0.6	480	0.6	480	1.1	480	0.9	480	0.9	480	0.9
490	0.6	490	0.6	490	0.6	490	0.6	490	1.1	490	0.9	490	0.9	490	0.9
500	0.6	500	0.6	500	0.6	500	0.6	500	1.1	500	0.9	500	0.9	500	0.9

LINE 6

DATE SRVY	740204 34	DATE SRVY	740304 35	DATE SRVY	740401 36	DATE SRVY	740530 37	DATE SRVY	740816 38	DATE SRVY	760930 39	DATE SRVY	741203 40
188	15.8	188	15.8	188	15.9	188	15.6	188	15.9	188	15.4	188	15.4
198	12.8	198	12.9	198	13.1	198	10.9	198	12.1	198	13.4	198	13.4
200	12.8	200	12.9	200	13.1	200	10.9	200	12.1	200	13.4	200	13.4
210	12.8	210	12.9	210	12.2	210	12.8	210	13.1	210	13.1	210	13.1
215	10.3	215	10.5	215	12.8	215	7.5	215	7.6	215	13.0	215	13.0
220	6.3	220	8.3	220	2.9	220	5.1	220	5.3	220	7.9	220	7.9
225	6.8	225	8.3	225	9.8	225	5.1	225	5.3	225	7.9	225	7.9
230	6.8	230	8.3	230	9.8	230	5.1	230	5.3	230	7.9	230	7.9
240	2.2	240	3.1	240	4.4	240	3.0	240	4.6	240	5.5	240	5.5
260	4.2	260	3.1	260	2.61	260	1.9	260	2.0	260	3.8	260	3.8
280	2.2	280	1.5	280	3.0	280	1.1	280	1.4	280	2.3	280	2.3
300	1.2	300	0.0	300	2.4	300	0.3	300	0.9	300	1.5	300	1.5
320	0.4	320	0.0	320	0.9	320	0.4	320	0.9	320	1.5	320	1.5
350	0.4	350	0.0	350	0.9	350	0.4	350	0.9	350	1.5	350	1.5
370	0.2	370	0.1	370	0.7	370	0.4	370	0.7	370	1.1	370	1.1
400	0.7	400	0.4	400	3.75	400	1.0	400	1.5	400	0.1	400	0.1
420	0.4	420	0.4	420	3.75	420	0.9	420	1.5	420	0.0	420	0.0
430	0.4	430	0.4	430	3.75	430	0.9	430	1.5	430	0.0	430	0.0
440	0.4	440	0.4	440	3.75	440	0.9	440	1.5	440	0.0	440	0.0
450	0.4	450	0.4	450	3.75	450	0.9	450	1.5	450	0.0	450	0.0
460	0.4	460	0.4	460	3.75	460	0.9	460	1.5	460	0.0	460	0.0
470	0.4	470	0.4	470	3.75	470	0.9	470	1.5	470	0.0	470	0.0
480	0.4	480	0.4	480	3.75	480	0.9	480	1.5	480	0.0	480	0.0
490	0.4	490	0.4	490	3.75	490	0.9	490	1.5	490	0.0	490	0.0
500	0.4	500	0.4	500	3.75	500	0.9	500	1.5	500	0.0	500	0.0

LINE 7

DATE 701113	DATE 701214	DATE 710114	DATE 710209	DATE 710309	DATE 710408	DATE 710510	DATE 710607
SRVY 2	SRVY 3	SRVY 4	SRVY 5	SRVY 6	SRVY 7	SRVY 8	SRVY 9
173. 14.3	173. 14.2	173. 14.4	173. 14.3	173. 14.3	173. 14.2	173. 14.1	173. 14.2
204. 14.8	205. 14.8	205. 14.9	203. 14.0	181. 14.1	181. 14.5	181. 14.4	190. 14.7
214. 11.7	214. 11.5	214. 12.0	180. 14.0	195. 14.0	193. 14.0	200. 14.2	200. 14.4
227. 11.1	227. 11.1	227. 11.2	216. 11.3	200. 14.0	204. 14.4	205. 15.4	14.9
230. 6.6	230. 7.0	232. 6.1	237. 11.2	204. 15.1	214. 11.4	215. 11.6	218. 11.4
255. 3.6	259. 4.8	259. 4.1	232. 6.0	218. 11.8	225. 11.5	225. 11.0	228. 10.9
275. 2.1	275. 3.5	275. 3.5	250. 4.4	225. 11.6	229. 6.4	228. 6.7	229. 6.6
300. 1.2	300. 2.6	300. 3.5	275. 3.1	240. 5.3	250. 4.6	250. 6.4	250. 6.4
325. .01	325. 1.5	325. 3.1	300. 1.8	250. 4.3	275. 3.0	275. 3.5	275. 4.8
350. .02	350. .8	350. 1.9	325. .7	275. 2.6	300. 2.3	300. 2.2	300. 3.0
375. .02	375. .8	375. .8	350. .8	300. 1.1	325. 1.4	325. .8	325. 1.1
400. .03	400. .0	400. .6	375. .6	325. .2	350. .2	350. .9	350. 0.0
425. .08	425. .0	425. .2	400. .1	350. .4	375. .1	375. .1	375. .1
450. .24	450. .0	450. .5	425. .1	400. .4	392. .3	400. .1	400. .0
475. .35	475. .0	475. .2	450. .4	425. .4	425. .7	425. .1	425. .1
				450. .3		425. .1	415. .2

LINE 7

DATE 710809	DATE 710931	DATE 711214	DATE 720103	DATE 720204	DATE 720317	DATE 720413
SRVY 10	SRVY 11	SRVY 13	SRVY 14	SRVY 15	SRVY 16	SRVY 17
173. 14.1	173. 14.2	173. 14.2	173. 14.2	173. 14.2	173. 14.3	173. 14.2
193. 13.8	193. 14.5	193. 13.9	194. 14.3	200. 14.3	201. 14.7	200. 14.2
204. 14.9	205. 13.8	204. 14.6	204. 15.1	205. 14.8	212. 12.0	208. 14.8
216. 11.5	215. 14.8	215. 11.7	213. 11.8	224. 10.8	228. 11.6	219. 11.2
228. 10.1	225. 10.9	225. 11.1	225. 11.9	220. 6.6	225. 6.9	225. 11.2
252. 1.1	251. 5.3	252. 7.0	258. 4.6	250. 4.0	254. 5.4	250. 6.4
264. 6.4	262. 7.2	264. 7.0	253. 4.6	275. 5.1	277. 3.2	265. 5.0
278. 5.0	285. 6.6	281. 6.1	278. 3.7	275. 3.7	300. 1.9	275. 2.9
300. 2.5	300. 2.8	300. 3.1	300. 3.1	325. 2.0	325. 1.0	300. 1.5
325. 1.4	320. 2.4	325. 2.3	325. 2.3	350. .1	350. .1	325. .8
350. .6	350. .3	350. 1.3	350. .7	375. .1	375. .1	375. .1
375. .01	375. .0	375. .5	400. .1	400. .8	400. .3	400. .7
400. .01	400. .0	400. .2	400. .1	425. .1	425. .1	425. .1
425. .03	425. .0	425. .0	400. .8	450. .2	450. .1	425. .1
450. .08	450. .0	450. .1	425. .1	450. .2	450. .1	450. .1
475. .25	475. .0	475. .2	450. .2	475. .2	475. .2	475. .2
			475. .3		475. .2	475. .2

LINE 7

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 720609 | 720624 | 720805 | 720929 | 721211 | 730115 | 730215 | 730315 | 730215 | 730215 | 730107 | 730107 | 730107 |
| 16 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 24 | 24 | 33 | 33 | 33 |
| 173. 14.3 | 173. 14.3 | 173. 14.3 | 173. 14.3 | 173. 14.5 | 173. 14.7 | 173. 14.7 | 173. 14.7 | 173. 14.7 | 173. 14.7 | 173. 14.7 | 173. 14.7 | 173. 14.7 |
| 198. 14.4 | 194. 14.3 | 13.6 14.6 | 187. 14.6 | 14.8 14.8 | 163. 14.8 | 163. 14.8 | 163. 14.8 | 163. 14.8 | 163. 14.8 | 163. 14.8 | 163. 14.8 | 163. 14.8 |
| 205. 15.0 | 200. 14.9 | 200. 14.7 | 200. 14.3 | 200. 14.6 | 200. 15.0 | 200. 15.0 | 200. 15.0 | 200. 15.0 | 200. 15.0 | 200. 15.0 | 200. 15.0 | 200. 15.0 |
| 224. 11.2 | 214. 11.4 | 204. 15.1 | 205. 15.0 | 223. 11.8 | 205. 15.4 | 207. 15.4 | 207. 15.4 | 207. 15.4 | 207. 15.4 | 207. 15.4 | 207. 15.4 | 207. 15.4 |
| 230. 6.4 | 224. 11.1 | 215. 11.8 | 215. 11.9 | 230. 9.0 | 215. 12.0 | 218. 12.1 | 218. 12.1 | 218. 12.1 | 218. 12.1 | 218. 12.1 | 218. 12.1 | 218. 12.1 |
| 250. 6.2 | 227. 8.9 | 225. 11.7 | 225. 11.5 | 255. 6.2 | 222. 11.7 | 225. 12.1 | 225. 12.1 | 225. 12.1 | 225. 12.1 | 225. 12.1 | 225. 12.1 | 225. 12.1 |
| 275. 4.2 | 246. 6.6 | 232. 8.1 | 228. 9.3 | 280. 3.9 | 249. 6.2 | 261. 4.8 | 261. 4.8 | 261. 4.8 | 261. 4.8 | 261. 4.8 | 261. 4.8 | 261. 4.8 |
| 300. 1.9 | 274. 3.5 | 254. 6.2 | 256. 7.6 | 300. 2.4 | 274. 6.2 | 287. 2.9 | 287. 2.9 | 287. 2.9 | 287. 2.9 | 287. 2.9 | 287. 2.9 | 287. 2.9 |
| 325. 6.9 | 300. 1.8 | 277. 4.4 | 274. 6.5 | 325. 1.3 | 300. 2.8 | 300. 2.8 | 300. 2.8 | 300. 2.8 | 300. 2.8 | 300. 2.8 | 300. 2.8 | 300. 2.8 |
| 350. 4.5 | 325. 0.7 | 325. 0.0 | 279. 6.8 | 350. 4.5 | 325. 1.6 | 325. 1.6 | 325. 1.6 | 325. 1.6 | 325. 1.6 | 325. 1.6 | 325. 1.6 | 325. 1.6 |
| 375. 4.2 | 350. 0.6 | 350. 0.6 | 300. 3.8 | 375. 4.2 | 350. 0.6 | 350. 0.6 | 350. 0.6 | 350. 0.6 | 350. 0.6 | 350. 0.6 | 350. 0.6 | 350. 0.6 |
| 400. 4.1 | 375. 0.2 | 375. 0.2 | 325. 1.7 | 400. 4.1 | 375. 0.2 | 375. 0.2 | 375. 0.2 | 375. 0.2 | 375. 0.2 | 375. 0.2 | 375. 0.2 | 375. 0.2 |
| 425. 1.8 | 400. 0.2 | 400. 0.2 | 375. 1.7 | 425. 1.8 | 400. 0.2 | 400. 0.2 | 400. 0.2 | 400. 0.2 | 400. 0.2 | 400. 0.2 | 400. 0.2 | 400. 0.2 |
| 450. 1.2 | 425. 0.2 | 425. 0.2 | 400. 0.8 | 450. 1.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 |
| 475. 0.8 | 450. 0.2 | 450. 0.2 | 425. 0.6 | 475. 0.8 | 450. 0.2 | 450. 0.2 | 450. 0.2 | 450. 0.2 | 450. 0.2 | 450. 0.2 | 450. 0.2 | 450. 0.2 |
| 500. 0.6 | 500. 0.6 | 500. 0.6 | 450. 0.6 | 500. 0.6 | 500. 0.6 | 500. 0.6 | 500. 0.6 | 500. 0.6 | 500. 0.6 | 500. 0.6 | 500. 0.6 | 500. 0.6 |
| 525. 0.0 | 525. 0.0 | 525. 0.0 | 488. 0.0 | 525. 0.0 | 525. 0.0 | 525. 0.0 | 525. 0.0 | 525. 0.0 | 525. 0.0 | 525. 0.0 | 525. 0.0 | 525. 0.0 |
| 550. 0.0 | 550. 0.0 | 550. 0.0 | 525. 0.0 | 550. 0.0 | 550. 0.0 | 550. 0.0 | 550. 0.0 | 550. 0.0 | 550. 0.0 | 550. 0.0 | 550. 0.0 | 550. 0.0 |

LINE 7

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 730328 | 730413 | 730614 | 730712 | 730809 | 731008 | 731205 | 731205 | 731205 | 731205 | 740107 | 740107 | 740107 |
| 26 | 27 | 28 | 29 | 30 | 31 | 32 | 32 | 32 | 32 | 33 | 33 | 33 |
| 173. 14.2 | 173. 14.7 | 14.7 173. | 173. 14.8 | 173. 14.7 | 173. 14.7 | 173. 14.7 | 173. 14.7 | 173. 14.7 | 173. 14.7 | 173. 14.7 | 173. 14.7 | 173. 14.7 |
| 195. 14.0 | 194. 14.8 | 14.4 194. | 200. 15.0 | 194. 14.8 | 194. 14.8 | 194. 14.8 | 194. 14.8 | 194. 14.8 | 194. 14.8 | 194. 14.8 | 194. 14.8 | 194. 14.8 |
| 205. 15.1 | 205. 15.3 | 204. 204. | 208. 15.3 | 200. 15.0 | 204. 204. | 204. 204. | 204. 204. | 204. 204. | 204. 204. | 204. 204. | 204. 204. | 204. 204. |
| 214. 12.0 | 214. 12.3 | 212. 12.8 | 226. 12.3 | 213. 15.6 | 211. 13.5 | 207. 13.4 | 207. 13.4 | 207. 13.4 | 207. 13.4 | 207. 13.4 | 207. 13.4 | 207. 13.4 |
| 224. 11.4 | 225. 11.5 | 222. 12.7 | 246. 6.3 | 213. 15.1 | 222. 12.5 | 226. 8.9 | 226. 8.9 | 226. 8.9 | 226. 8.9 | 226. 8.9 | 226. 8.9 | 226. 8.9 |
| 244. 9.0 | 239. 6.9 | 240. 6.8 | 275. 6.3 | 221. 12.9 | 227. 9.6 | 250. 6.1 | 250. 6.1 | 250. 6.1 | 250. 6.1 | 250. 6.1 | 250. 6.1 | 250. 6.1 |
| 254. 5.3 | 275. 2.0 | 269. 4.6 | 300. 4.3 | 237. 7.3 | 250. 5.9 | 275. 4.7 | 275. 4.7 | 275. 4.7 | 275. 4.7 | 275. 4.7 | 275. 4.7 | 275. 4.7 |
| 276. 1.6 | 300. 1.6 | 300. 3.6 | 325. 2.7 | 253. 6.2 | 300. 4.2 | 300. 3.5 | 300. 3.5 | 300. 3.5 | 300. 3.5 | 300. 3.5 | 300. 3.5 | 300. 3.5 |
| 300. 1.8 | 325. 1.8 | 325. 1.0 | 350. 1.1 | 275. 5.0 | 325. 2.6 | 325. 2.0 | 325. 2.0 | 325. 2.0 | 325. 2.0 | 325. 2.0 | 325. 2.0 | 325. 2.0 |
| 325. 0.4 | 350. 0.0 | 350. 0.6 | 400. 0.6 | 325. 3.0 | 375. 1.4 | 375. 1.1 | 375. 1.1 | 375. 1.1 | 375. 1.1 | 375. 1.1 | 375. 1.1 | 375. 1.1 |
| 350. 0.4 | 375. 0.0 | 375. 0.0 | 425. 0.2 | 350. 0.8 | 400. 0.6 | 400. 0.6 | 400. 0.6 | 400. 0.6 | 400. 0.6 | 400. 0.6 | 400. 0.6 | 400. 0.6 |
| 375. 0.0 | 400. 0.0 | 400. 0.0 | 425. 0.2 | 375. 0.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 | 425. 0.2 |
| 400. 0.0 | 425. 0.0 | 425. 0.0 | 450. 0.2 | 400. 0.2 | 450. 0.2 | 450. 0.2 | 450. 0.2 | 450. 0.2 | 450. 0.2 | 450. 0.2 | 450. 0.2 | 450. 0.2 |
| 414. 0.2 | 450. 0.6 | 450. 0.6 | 475. 0.2 | 425. 0.2 | 475. 0.2 | 475. 0.2 | 475. 0.2 | 475. 0.2 | 475. 0.2 | 475. 0.2 | 475. 0.2 | 475. 0.2 |
| | | | | | | | | | | | | |

LINE 7

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 700204
34 | 700304
35 | 700401
36 | 700530
37 | 700616
38 | 700930
39 | 701204
40 | |
| 173
14.8 | 173
14.6 | 173
14.7 | 173
14.2 | 173
14.2 | 173
14.3 | 173
14.3 | |
| 190
14.9 | 15.1 | 187
15.4 | 200
14.9 | 195
14.2 | 200
14.5 | 200
14.4 | |
| 203
15.5 | 13.1 | 198
14.5 | 200
15.3 | 200
14.6 | 208
14.6 | 208
14.9 | |
| 211
13.2 | 222 | 200
14.9 | 214
13.4 | 203
14.9 | 214
12.8 | 214
13.0 | |
| 213
13.9 | 229 | 214
15.5 | 223 | 210
13.1 | 223 | 226 | |
| 221
12.4 | 232 | 215
12.8 | 236 | 221
11.7 | 237 | 235 | |
| 232
9.6 | 250 | 220
13.6 | 270 | 221
7.6 | 271 | 235 | |
| 250
4.0 | 255 | 235
6.0 | 280 | 234
7.0 | 250 | 252 | |
| 256
3.5 | 270 | 261 | 3.4 | 249 | 275 | 250 | |
| 283
3.0 | 300 | 266 | 2.8 | 275 | 300 | 275 | |
| 300
2.1 | 325 | 300 | 1.9 | 300 | 325 | 300 | |
| 325
1.3 | 350 | 325 | 1.3 | 325 | 325 | 325 | |
| 350
0.5 | 375 | 350 | 0.6 | 375 | 350 | 375 | |
| 375
0.5 | 400 | 375 | 0.4 | 400 | 400 | 400 | |
| 400
0.7 | 425 | 400 | 0.4 | 400 | 425 | 400 | |
| 425
0.4 | 450 | 425 | 0.2 | 425 | 450 | 425 | |
| 450
0.2 | 475 | 450 | 0.1 | 450 | 475 | 450 | |
| 475
0.2 | 500 | 475 | 0.2 | 500 | 500 | 475 | |
| 500
0.2 | 500 | 500 | 0.2 | 500 | 500 | 500 | |

LINE 8

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 701113
2 | 701214
3 | 701114
4 | 701209
5 | 701309
6 | 701404
7 | 701510
8 | 701607
9 |
| 172
18.1 | 172
18.0 | 172
18.1 | 172
18.1 | 172
18.1 | 172
18.0 | 172
18.0 | 172
17.9 |
| 190
16.1 | 190
15.8 | 192
12.7 | 192
15.6 | 192
18.1 | 192
15.8 | 192
15.9 | 190
15.9 |
| 201
12.8 | 203
12.6 | 228
7.8 | 229
12.9 | 190
15.7 | 202
12.4 | 200
12.7 | 200
12.7 |
| 213
11.8 | 216
11.0 | 232
5.7 | 232
8.5 | 200
13.0 | 220
10.0 | 219
10.2 | 219
10.2 |
| 233
7.9 | 233
7.1 | 250
4.3 | 228
7.8 | 217
11.2 | 225
6.1 | 223
6.9 | 223
6.9 |
| 250
5.0 | 252
5.0 | 275
3.2 | 235
5.8 | 225
8.4 | 250
3.6 | 250
4.1 | 250
4.1 |
| 300
3.1 | 303
3.0 | 300
2.8 | 250
4.6 | 229
7.6 | 275
1.9 | 275
2.5 | 260
3.9 |
| 304
2.0 | 300
3.2 | 325
2.2 | 311
4.4 | 250
4.4 | 300
0.8 | 300
1.4 | 275
4.5 |
| 325
1.3 | 325
1.5 | 350
1.6 | 300
1.0 | 275
2.5 | 325
0.0 | 325
0.7 | 293
4.7 |
| 350
0.7 | 350
0.8 | 375
0.4 | 325
0.3 | 300
1.1 | 350
0.7 | 350
0.3 | 300
3.7 |
| 375
0.0 | 375
0.2 | 400
0.9 | 350
0.3 | 325
0.3 | 375
0.2 | 375
0.3 | 325
1.3 |
| 400
0.8 | 400
0.8 | 425
0.2 | 400
0.7 | 350
0.2 | 400
0.2 | 400
0.4 | 350
0.8 |
| 425
0.4 | 425
0.6 | 450
0.1 | 425
0.1 | 400
0.1 | 425
0.2 | 425
0.2 | 375
0.8 |
| 450
0.2 | 450
0.2 | 475
0.2 | 475
0.3 | 425
0.1 | 475
0.2 | 475
0.2 | 425
0.8 |
| 475
0.2 | 475
0.2 | 500
0.2 | 475
0.3 | 425
0.1 | 500
0.2 | 475
0.2 | 425
0.8 |

LINE 6

DATE 710609 SRVY 10	DATE 710831 SRVY 11	DATE 711006 SRVY 12	DATE 711214 SRVY 13	DATE 720103 SRVY 14	DATE 720208 SRVY 15	DATE 720317 SRVY 16	DATE 720413 SRVY 17
172. 17.7	172. 18.0	172. 17.6	172. 17.8	172. 17.6	172. 17.7	172. 17.6	172. 18.8
189. 16.3	189. 16.3	190. 16.3	190. 16.3	190. 16.3	190. 16.3	190. 16.1	190. 16.0
200. 12.8	200. 12.4	200. 12.9	200. 12.8	200. 12.8	200. 12.8	200. 12.9	200. 12.9
218. 10.7	218. 10.2	218. 10.9	218. 10.9	218. 11.8	218. 11.8	218. 11.2	220. 10.1
229. 6.5	229. 6.6	229. 6.9	229. 6.5	229. 7.0	229. 6.3	229. 6.9	229. 7.2
250. 5.3	250. 6.2	250. 7.3	250. 6.8	250. 3.5	250. 3.6	250. 3.5	250. 3.6
275. 0.1	275. 8.4	275. 6.0	275. 2.4	275. 2.0	275. 2.5	275. 2.1	275. 2.1
300. 5.7	300. 8.3	300. 3.4	300. 1.0	300. 1.1	300. 1.2	300. 1.0	300. 1.3
313. 5.1	313. 4.4	313. 1.9	313. 0.7	313. 0.3	313. 0.4	313. 0.2	313. 0.6
325. 2.0	325. 2.4	325. 1.8	325. 0.1	325. 0.2	325. 0.2	325. 0.2	325. 0.6
350. 0.7	350. 0.7	350. 0.8	350. 0.5	350. 0.2	350. 0.2	350. 0.6	350. 0.6
375. 0.1	375. 0.1	375. 0.4	375. 0.2	375. 0.1	375. 0.1	375. 0.1	375. 0.1
400. 0.2	400. 0.2	400. 0.2	400. 0.2	400. 0.2	400. 0.2	400. 0.2	400. 0.2
425. 0.2	425. 0.2	425. 0.2	425. 0.2	425. 0.2	425. 0.2	425. 0.2	425. 0.2
450. 0.2	450. 0.2	450. 0.2	450. 0.2	450. 0.2	450. 0.2	450. 0.2	450. 0.2
475. 0.2	475. 0.2	475. 0.2	475. 0.2	475. 0.2	475. 0.2	475. 0.2	475. 0.2
500. 0.2	500. 0.2	500. 0.2	500. 0.2	500. 0.2	500. 0.2	500. 0.2	500. 0.2

LINE 6

DATE 720609 SRVY 18	DATE 720625 SRVY 19	DATE 720805 SRVY 20	DATE 720929 SRVY 21	DATE 721211 SRVY 22	DATE 730115 SRVY 23	DATE 730215 SRVY 24	DATE 730315 SRVY 25
171. 17.9	172. 17.7	172. 17.7	172. 17.7	172. 17.8	172. 18.1	172. 18.5	172. 18.2
189. 16.2	189. 16.1	189. 16.0	189. 16.8	189. 16.9	189. 16.1	189. 16.0	189. 15.9
201. 12.6	200. 12.4	200. 12.8	200. 12.9	200. 13.5	200. 13.0	200. 13.2	200. 12.9
218. 10.7	218. 11.0	217. 10.9	218. 10.9	218. 11.3	218. 11.0	218. 11.5	215. 10.9
229. 6.4	229. 6.7	229. 6.9	229. 6.2	229. 7.5	229. 5.5	229. 5.5	221. 7.0
250. 5.3	250. 3.7	250. 4.9	250. 4.8	250. 4.2	250. 2.4	250. 4.2	242. 5.1
275. 0.1	274. 2.1	274. 3.7	276. 4.0	275. 2.4	275. 0.8	270. 4.2	242. 5.1
300. 5.0	300. 4.9	300. 1.6	300. 2.4	300. 1.3	300. 0.5	300. 1.3	292. 3.1
325. 1.0	325. 0.2	325. 0.5	325. 1.3	325. 0.6	325. 0.5	325. 0.5	300. 1.3
350. 0.7	350. 0.3	350. 0.2	350. 0.6	350. 0.1	350. 0.2	350. 0.1	325. 0.5
375. 0.1	375. 0.1	375. 0.1	375. 0.1	375. 0.1	375. 0.1	375. 0.1	350. 0.4
400. 0.2	400. 0.2	400. 0.2	400. 0.2	400. 0.2	400. 0.2	400. 0.2	375. 0.4
425. 0.2	425. 0.2	425. 0.2	425. 0.2	425. 0.2	425. 0.2	425. 0.2	400. 0.4
450. 0.2	450. 0.2	450. 0.2	450. 0.2	450. 0.2	450. 0.2	450. 0.2	425. 0.4
475. 0.2	475. 0.2	475. 0.2	475. 0.2	475. 0.2	475. 0.2	475. 0.2	450. 0.4
500. 0.2	500. 0.2	500. 0.2	500. 0.2	500. 0.2	500. 0.2	500. 0.2	475. 0.4

LINE 9

DATE SRVY	701113 2	DATE SRVY	701214 3	DATE SRVY	710114 4	DATE SRVY	710209 5	DATE SRVY	710309 6	DATE SRVY	710408 7	DATE SRVY	710510 8	DATE SRVY	710607 9
186	14.4	186	14.5	186	14.4	186	14.6	186	14.5	186	14.4	186	14.4	186	14.3
200	10.5	200	10.7	200	10.4	200	10.6	200	10.5	200	10.5	200	10.4	200	10.2
234	10.5	234	10.4	234	10.4	234	10.6	234	10.4	234	10.5	234	10.4	234	10.2
245	7.5	245	10.2	245	10.3	245	9.3	245	9.4	245	9.3	245	9.4	245	9.5
270	4.3	270	5.3	270	8.0	270	6.5	270	10.9	270	10.6	270	10.9	270	10.8
295	2.5	295	4.9	295	6.0	295	6.0	295	6.4	295	6.9	295	7.4	295	7.3
300	2.2	300	3.7	300	3.8	300	4.3	300	3.5	300	5.1	300	4.6	300	5.0
325	1.2	325	1.2	325	4.1	325	2.7	325	2.2	325	5.1	325	4.6	325	6.6
350	.8	350	1.2	350	3.8	350	1.5	350	1.2	350	4.2	350	2.9	350	4.3
375	.6	375	.2	375	1.5	375	.5	375	.6	375	2.5	375	1.5	375	3.2
400	.2	400	-1.3	400	1.1	400	.4	400	0.0	400	3.0	400	1.5	400	1.6
425	-1.1	425	-2.7	425	-2.7	425	-1.2	425	-1.6	425	2.1	425	1.2	425	-2.3
450	-2.4	450	-2.7	450	-2.7	450	-1.2	450	-3.4	450	2.6	450	-2.5	450	-4.4
475	-4.2	475	-3.6	475	-3.6	475	-2.6	475	-2.9	475	2.6	475	-2.5	475	-4.3

LINE 9

DATE SRVY	710809 10	DATE SRVY	710931 11	DATE SRVY	711006 12	DATE SRVY	711214 13	DATE SRVY	720103 14	DATE SRVY	720208 15	DATE SRVY	720317 16	DATE SRVY	720413 17
186	14.4	186	14.2	186	14.5	186	14.4	186	14.4	186	14.3	186	14.4	186	14.4
192	12.9	192	10.5	192	20.6	192	10.3	192	11.0	192	20.0	192	10.5	192	10.4
200	10.4	200	9.3	200	22.5	200	9.5	200	9.5	200	22.5	200	9.5	200	9.6
225	9.4	225	10.6	225	23.3	225	10.5	225	10.3	225	23.7	225	10.9	225	10.7
237	10.5	237	7.2	237	24.2	237	7.9	237	7.9	237	24.2	237	8.0	237	8.0
242	7.3	242	6.2	242	26.7	242	5.7	242	5.9	242	27.8	242	5.2	242	6.8
267	6.7	267	3.9	267	27.4	267	3.7	267	3.7	267	30.0	267	2.5	267	3.9
282	4.2	282	2.6	282	27.8	282	3.9	282	3.0	282	34.3	282	2.8	282	3.9
295	2.1	295	.4	295	30.0	295	2.5	295	3.0	295	32.5	295	2.8	295	3.1
320	2.0	320	.3	320	32.5	320	1.5	320	1.8	320	37.4	320	2.1	320	2.1
350	.7	350	.3	350	32.5	350	1.5	350	1.0	350	40.0	350	1.9	350	1.8
375	.4	375	-1.1	375	37.5	375	.7	375	.6	375	42.5	375	1.3	375	1.3
400	-1.7	400	-2.8	400	42.5	400	0.0	400	.2	400	45.0	400	1.1	400	1.1
425	-3.2	425	-2.8	425	42.5	425	-2.6	425	-2.4	425	47.5	425	1.2	425	1.2
450	-4.0	450	-2.8	450	47.5	450	-2.6	450	-2.1	450	47.5	450	2.0	450	2.3
475	-3.1	475	-3.1	475	47.5	475	-2.6	475	-2.9	475	47.5	475	3.0	475	3.1
500	-3.1	500	-3.1	500	47.5	500	-2.6	500	-2.9	500	47.5	500	3.0	500	3.1

LINE 9

DATE SHVY	740204 34	DATE SHVY	740302 35	DATE SHVY	740401 36	DATE SHVY	740530 37	DATE SHVY	740816 38	DATE SHVY	740930 39	DATE SHVY	741204 40
186	14.5	186	18.0	186	14.4	186	14.4	186	14.5	186	14.5	186	14.5
200	10.4	184	11.0	200	10.9	200	10.5	200	10.4	200	10.7	187	11.0
225	9.6	225	9.7	218	9.5	225	9.6	225	9.6	225	9.6	200	10.4
216	11.4	238	10.1	218	11.5	239	11.5	237	11.6	237	11.5	200	10.4
244	7.8	240	7.3	241	5.4	249	7.2	256	6.0	246	7.1	257	11.9
272	4.8	277	4.0	248	3.4	276	4.0	268	3.7	275	4.0	250	7.5
300	2.9	306	2.0	300	2.6	325	2.8	300	2.0	300	2.1	265	4.8
325	1.8	326	1.1	325	1.3	350	1.7	325	2.0	325	2.2	300	1.2
375	1.4	375	1.1	375	1.1	375	1.2	375	1.1	375	1.1	325	1.2
400	2	375	1.5	400	1.7	400	1.2	350	1.1	350	1.1	350	1.1
425	1.8	425	1.0	425	1.0	425	1.5	400	1.0	425	1.2	400	1.4
450	1.7	450	1.9	450	2.5	450	1.9	450	1.7	450	1.9	425	1.9
475	2.9	475	2.6	475	2.5	475	2.7	475	2.3	475	2.3	450	2.4

LINE 10

DATE SHVY	701113 2	DATE SHVY	701215 3	DATE SHVY	701115 4	DATE SHVY	710209 5	DATE SHVY	710309 6	DATE SHVY	710408 7	DATE SHVY	710510 8	DATE SHVY	710607 9
222	13.7	222	13.6	222	13.6	222	13.7	222	13.9	222	13.8	222	13.7	222	13.7
215	10.4	215	10.5	215	10.8	215	10.7	225	13.5	231	11.3	232	11.4	231	11.6
217	7.5	218	7.0	216	7.7	245	6.8	231	11.8	240	7.7	240	7.7	239	7.9
240	3.7	250	5.7	270	4.5	250	6.0	240	7.6	250	7.1	257	6.6	267	6.7
294	1.5	277	6.1	312	5.8	268	5.8	250	6.4	275	5.6	275	2.6	274	5.3
325	1.2	300	2.8	325	3.6	275	1.5	275	4.1	300	4.5	300	3.6	300	3.4
350	0.6	325	1.6	350	1.7	300	2.6	300	2.3	325	2.7	325	1.6	325	1.9
375	0.2	350	0.8	375	1.4	325	0.9	325	1.0	350	1.2	350	0.3	350	0.8
400	0.3	375	0.0	400	2.8	350	0.2	375	0.1	365	1.5	375	0.9	375	1.1
425	1.3	400	1.7	400	2.4	400	1.3	375	0.9	375	0.9	400	1.4	400	1.8
450	2.7	425	2.8	425	2.8	425	1.3	400	0.9	365	2.6	400	1.4	425	1.8
475	2.7	425	2.8	425	2.8	450	1.3	425	2.2	425	2.6	450	1.4	425	1.8
						450	1.3	450	2.2	450	2.6	450	1.4	450	2.1
															2.1

LINE 11

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 70035 | 70002 | 70031 | 70016 | 71001 | 71204 | |
| 173 | 173 | 175 | 174 | 173 | 173 | |
| 143 | 177 | 180 | 117 | 190 | 147 | |
| 200 | 169 | 200 | 73 | 200 | 200 | |
| 225 | 200 | 250 | 515 | 225 | 219 | |
| 250 | 73 | 275 | 316 | 250 | 243 | |
| 275 | 250 | 300 | 210 | 275 | 277 | |
| 300 | 21 | 325 | 116 | 300 | 240 | |
| 325 | 300 | 350 | 19 | 325 | 300 | |
| 350 | 111 | 375 | 43 | 350 | 325 | |
| 400 | 375 | 400 | 112 | 375 | 350 | |
| 425 | 117 | 425 | 112 | 400 | 400 | |
| 450 | 350 | 475 | 116 | 425 | 400 | |
| 475 | 325 | 475 | 216 | 425 | 425 | |
| 500 | 400 | 500 | 500 | 500 | 512 | |

LINE 12

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 70110 | 701215 | 710115 | 710209 | 710309 | 710409 | 710511 |
| 180 | 184 | 186 | 184 | 188 | 188 | 184 |
| 207 | 186 | 200 | 182 | 200 | 200 | 200 |
| 223 | 200 | 223 | 186 | 216 | 216 | 217 |
| 243 | 187 | 243 | 186 | 216 | 216 | 217 |
| 263 | 187 | 263 | 186 | 216 | 216 | 217 |
| 283 | 187 | 283 | 186 | 216 | 216 | 217 |
| 303 | 187 | 303 | 186 | 216 | 216 | 217 |
| 323 | 187 | 323 | 186 | 216 | 216 | 217 |
| 343 | 187 | 343 | 186 | 216 | 216 | 217 |
| 363 | 187 | 363 | 186 | 216 | 216 | 217 |
| 383 | 187 | 383 | 186 | 216 | 216 | 217 |
| 403 | 187 | 403 | 186 | 216 | 216 | 217 |
| 423 | 187 | 423 | 186 | 216 | 216 | 217 |
| 443 | 187 | 443 | 186 | 216 | 216 | 217 |
| 463 | 187 | 463 | 186 | 216 | 216 | 217 |
| 483 | 187 | 483 | 186 | 216 | 216 | 217 |
| 503 | 187 | 503 | 186 | 216 | 216 | 217 |

LINE 12

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 188. 10.4 | 188. 11.0 | 188. 11.2 | 188. 11.0 | 188. 11.0 | 188. 11.2 | 188. 11.2 | 188. 11.4 |
| 200. 10.1 | 200. 9.7 | 200. 9.7 | 200. 9.7 | 200. 10.0 | 200. 9.9 | 200. 9.9 | 200. 9.8 |
| 216. 9.4 | 216. 8.4 | 217. 8.4 | 217. 8.5 | 217. 8.9 | 216. 10.0 | 216. 10.0 | 218. 9.4 |
| 219. 7.5 | 223. 7.7 | 223. 7.7 | 223. 7.4 | 220. 7.6 | 227. 7.2 | 227. 7.2 | 225. 7.6 |
| 244. 7.0 | 248. 6.9 | 248. 6.9 | 248. 4.9 | 245. 5.2 | 250. 4.5 | 250. 4.5 | 250. 4.3 |
| 253. 6.6 | 272. 3.7 | 272. 3.7 | 273. 2.9 | 270. 3.2 | 275. 2.5 | 275. 2.5 | 275. 2.5 |
| 265. 5.3 | 300. 1.7 | 300. 1.7 | 300. 1.6 | 295. 1.9 | 300. 1.6 | 300. 1.6 | 300. 1.6 |
| 280. 4.4 | 325. 1.0 | 325. 1.0 | 325. 1.0 | 300. 1.6 | 325. 1.7 | 325. 1.7 | 325. 1.6 |
| 300. 2.5 | 350. 0.0 | 350. 0.0 | 350. 0.0 | 325. 1.6 | 350. 0.0 | 350. 0.0 | 350. 0.0 |
| 325. 1.0 | 375. -1.4 | 375. -1.4 | 375. -1.4 | 350. 0.0 | 375. -0.9 | 375. -0.9 | 375. -0.9 |
| 350. -1.7 | 400. -2.9 | 400. -2.9 | 400. -2.9 | 375. -0.9 | 400. -1.4 | 400. -1.4 | 400. -1.4 |
| 400. -2.9 | 425. -4.5 | 425. -4.5 | 425. -4.5 | 400. -1.4 | 425. -2.0 | 425. -2.0 | 425. -1.4 |
| | | | | 425. -4.5 | 450. -2.7 | 450. -2.7 | 450. -2.0 |
| | | | | 450. -3.7 | 450. -2.9 | 450. -2.9 | 500. -2.8 |

LINE 12

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 188. 11.5 | 188. 11.2 | 188. 11.2 | 188. 11.6 | 188. 11.6 | 188. 11.7 | 188. 11.7 | 188. 11.5 |
| 200. 10.1 | 200. 10.2 | 200. 10.2 | 200. 9.9 | 200. 9.9 | 200. 9.9 | 200. 9.9 | 200. 9.6 |
| 216. 9.4 | 216. 9.3 | 216. 9.3 | 216. 9.2 | 213. 8.6 | 216. 9.2 | 216. 9.2 | 216. 8.9 |
| 221. 9.2 | 240. 4.1 | 240. 4.1 | 235. 3.2 | 237. 3.4 | 249. 4.9 | 249. 4.9 | 250. 5.8 |
| 248. 4.9 | 262. 2.1 | 262. 2.1 | 262. 1.9 | 271. 1.7 | 275. 2.8 | 275. 2.8 | 270. 3.4 |
| 263. 1.6 | 300. 1.1 | 300. 1.1 | 300. 1.0 | 300. 1.0 | 300. 1.6 | 300. 1.6 | 300. 1.9 |
| 300. 1.6 | 325. 1.2 | 325. 1.2 | 325. 1.0 | 325. 1.0 | 325. 2.7 | 325. 2.7 | 325. 2.8 |
| 320. 0.0 | 350. -0.5 | 350. -0.5 | 350. -0.4 | 350. -0.4 | 350. -0.1 | 350. -0.1 | 350. 0.2 |
| 325. -0.6 | 375. -1.1 | 375. -1.1 | 375. -0.5 | 375. -0.5 | 375. -0.8 | 375. -0.8 | 375. 0.5 |
| 350. -1.7 | 400. -1.9 | 400. -1.9 | 400. -1.5 | 400. -1.5 | 400. -1.3 | 400. -1.3 | 400. -0.9 |
| 400. -2.5 | 425. -2.5 | 425. -2.5 | 425. -2.5 | 425. -2.5 | 425. -1.6 | 425. -1.6 | 425. -1.6 |
| 425. -1.0 | 450. -2.1 | 450. -2.1 | 450. -2.1 | 450. -2.1 | 450. -2.0 | 450. -2.0 | 450. -2.2 |
| 475. -2.5 | 500. -2.7 | 500. -2.7 | 500. -2.7 | 475. -3.5 | 500. -3.3 | 500. -3.3 | 475. -2.7 |

LINE 12

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 730329 | 730416 | 730815 | 730713 | 730810 | 731008 | 731206 | 740108 |
| 188. 11.3 | 188. 11.6 | 188. 11.8 | 188. 11.6 | 188. 11.6 | 188. 11.9 | 188. 12.0 | 188. 12.1 |
| 200. 10.2 | 200. 10.6 | 200. 9.9 | 200. 10.0 | 200. 10.2 | 200. 10.5 | 200. 10.6 | 200. 10.8 |
| 218. 9.0 | 216. 10.5 | 219. 8.7 | 218. 8.8 | 212. 8.6 | 218. 9.3 | 216. 9.3 | 214. 10.4 |
| 225. 7.4 | 225. 6.2 | 220. 6.9 | 225. 6.9 | 225. 6.7 | 225. 7.3 | 225. 7.4 | 219. 7.8 |
| 250. 5.0 | 250. 3.3 | 250. 6.3 | 250. 6.9 | 250. 7.0 | 250. 7.1 | 250. 6.7 | 243. 7.0 |
| 275. 3.3 | 275. 2.0 | 275. 4.3 | 277. 4.5 | 260. 7.0 | 275. 4.7 | 275. 4.7 | 272. 3.8 |
| 300. 1.7 | 300. 1.0 | 300. 1.2 | 277. 4.5 | 275. 5.0 | 300. 3.0 | 300. 3.0 | 300. 1.9 |
| 325. .8 | 325. .5 | 325. .8 | 300. 2.4 | 300. 2.4 | 300. 1.8 | 325. 1.8 | 325. 1.8 |
| 350. .2 | 350. .5 | 350. .2 | 325. 1.1 | 325. .9 | 325. 1.3 | 325. 1.3 | 325. 1.3 |
| 375. .4 | 375. .1 | 375. .4 | 350. .9 | 350. .9 | 375. 1.3 | 375. 1.3 | 375. 1.3 |
| 400. .8 | 400. .2 | 400. .8 | 400. .9 | 400. .2 | 400. 1.8 | 400. 1.8 | 400. 1.8 |
| 425. .1 | 425. .3 | 425. .1 | 425. .7 | 400. .1 | 400. .7 | 400. .7 | 400. .7 |
| 450. .2 | 450. .3 | 450. .2 | 425. .2 | 425. .2 | 450. .2 | 450. .2 | 450. .2 |
| 475. .4 | 475. .2 | 475. .4 | 450. .2 | 425. .2 | 450. .2 | 450. .2 | 450. .2 |

LINE 12

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 740205 | 740305 | 740402 | 740531 | 740816 | 741001 | 741204 | 741204 |
| 188. 12.1 | 188. 12.1 | 188. 12.3 | 188. 12.2 | 188. 12.8 | 188. 12.4 | 188. 12.1 | 188. 12.1 |
| 200. 10.7 | 200. 10.2 | 200. 10.7 | 200. 11.1 | 208. 10.9 | 200. 11.2 | 195. 12.6 | 195. 12.6 |
| 218. 9.0 | 216. 10.5 | 219. 8.7 | 218. 8.8 | 212. 8.6 | 218. 9.3 | 216. 9.3 | 214. 10.4 |
| 225. 7.4 | 225. 6.2 | 220. 6.9 | 225. 6.9 | 225. 6.7 | 225. 7.3 | 225. 7.4 | 219. 7.8 |
| 250. 5.0 | 250. 3.3 | 250. 6.3 | 250. 6.9 | 250. 7.0 | 250. 7.1 | 250. 6.7 | 243. 7.0 |
| 275. 3.3 | 275. 2.0 | 275. 4.3 | 277. 4.5 | 260. 7.0 | 275. 4.7 | 275. 4.7 | 272. 3.8 |
| 300. 1.7 | 300. 1.0 | 300. 1.2 | 277. 4.5 | 275. 5.0 | 300. 3.0 | 300. 3.0 | 300. 1.9 |
| 325. .8 | 325. .5 | 325. .8 | 300. 2.4 | 300. 2.4 | 300. 1.8 | 325. 1.8 | 325. 1.8 |
| 350. .2 | 350. .5 | 350. .2 | 325. 1.1 | 325. .9 | 325. 1.3 | 325. 1.3 | 325. 1.3 |
| 375. .4 | 375. .1 | 375. .4 | 350. .9 | 350. .9 | 375. 1.3 | 375. 1.3 | 375. 1.3 |
| 400. .8 | 400. .2 | 400. .8 | 400. .9 | 400. .2 | 400. 1.8 | 400. 1.8 | 400. 1.8 |
| 425. .1 | 425. .3 | 425. .1 | 425. .7 | 400. .1 | 400. .7 | 400. .7 | 400. .7 |
| 450. .2 | 450. .3 | 450. .2 | 425. .2 | 425. .2 | 450. .2 | 450. .2 | 450. .2 |
| 475. .4 | 475. .2 | 475. .4 | 450. .2 | 425. .2 | 450. .2 | 450. .2 | 450. .2 |

LINE 13

DATE 701116 SRVY 2	DATE 701215 SRVY 3	DATE 710115 SRVY 4	DATE 710210 SRVY 5	DATE 710309 SRVY 6	DATE 710409 SRVY 7	DATE 710511 SRVY 8	DATE 710608 SRVY 9
183. 14.0	183. 14.0	183. 14.0	183. 13.9	183. 13.9	183. 13.8	183. 13.8	183. 13.8
197. 10.5	195. 10.5	200. 10.5	200. 10.6	200. 10.6	200. 10.5	200. 10.4	200. 10.5
214. 11.2	218. 11.2	215. 11.5	218. 11.2	218. 11.2	219. 11.2	219. 11.2	219. 11.2
218. 11.3	218. 11.3	223. 11.7	223. 11.7	223. 11.7	225. 11.7	225. 11.7	225. 11.7
239. 5.7	241. 5.7	251. 5.7	251. 5.7	251. 5.7	250. 5.5	250. 5.5	250. 5.5
250. 6.6	260. 6.6	275. 5.7	280. 5.7	285. 6.9	280. 4.7	280. 4.7	280. 4.7
275. 4.0	288. 4.0	300. 3.5	300. 3.3	300. 2.5	275. 4.4	275. 4.4	275. 4.4
300. 1.8	300. 2.8	325. 1.3	325. 1.3	325. 2.7	290. 4.3	300. 2.4	300. 2.4
325. 1.2	325. 1.2	350. 1.2	350. 1.1	350. 0.6	300. 3.1	325. 1.0	325. 1.0
350. 1.2	350. 1.6	375. 1.2	375. 1.1	375. 0.0	325. 1.1	350. 1.0	350. 1.0
375. 2.4	375. 3.0	400. 1.7	400. 1.7	400. 2.3	350. 2.3	375. 1.8	375. 1.8
390. 3.3	375. 3.0	425. 2.7	425. 2.7	425. 3.1	400. 2.9	400. 2.7	400. 2.9

LINE 13

DATE 710810 SRVY 10	DATE 710901 SRVY 11	DATE 711007 SRVY 12	DATE 711215 SRVY 13	DATE 720104 SRVY 14	DATE 720209 SRVY 15	DATE 720317 SRVY 16	DATE 720417 SRVY 17
183. 13.8	183. 13.8	183. 13.7	183. 13.8	183. 14.0	183. 13.8	183. 13.8	183. 14.0
198. 10.1	197. 10.5	197. 10.5	197. 10.5	198. 10.5	200. 10.8	200. 10.5	200. 10.5
214. 11.7	212. 10.0	212. 10.0	209. 10.6	213. 10.5	211. 10.1	213. 11.7	208. 10.8
200. 10.6	219. 7.7	218. 8.2	219. 11.9	219. 8.3	217. 8.8	219. 6.7	214. 11.9
213. 10.7	244. 6.6	234. 7.0	219. 8.3	244. 6.0	243. 6.0	245. 5.6	218. 8.7
218. 7.8	253. 6.3	236. 6.3	244. 5.7	269. 3.7	267. 4.5	274. 2.9	242. 5.5
234. 6.5	278. 3.8	261. 3.6	269. 3.9	294. 2.2	293. 3.8	300. 1.7	268. 2.9
253. 6.5	300. 2.4	246. 2.3	244. 3.4	300. 1.9	300. 2.5	325. 1.7	283. 2.0
276. 6.0	325. 1.9	300. 2.1	300. 3.0	325. 1.2	325. 1.5	325. 1.5	325. 1.0
350. 2.7	350. 1.3	325. 1.3	350. 1.2	375. 1.1	375. 1.1	375. 1.1	375. 1.0
350. 1.7	350. 1.7	375. 1.9	375. 1.2	400. 1.0	400. 0.0	400. 0.0	350. 1.8
375. 1.1	388. 2.6	400. 3.0	400. 2.9	425. 1.0	400. 3.6	425. 1.4	400. 1.8
375. 2.0	400. 3.0	425. 2.6	425. 2.2	450. 2.1	425. 1.5	450. 1.9	450. 2.1
400. 2.5	400. 3.3	450. 3.3	450. 3.3	425. 3.1	475. 2.5	475. 2.9	475. 2.5

LINE 13

DATE SHVY	720609 18	DATE SHVY	720625 19	DATE SHVY	720805 20	DATE SHVY	720929 21	DATE SRVY	721211 22	DATE SHVY	730116 23	DATE SHVY	730215 24	DATE SHVY	730316 25
183	13.8	183	13.9	183	14.0	183	13.8	183	13.9	183	13.9	183	13.9	183	14.1
197	10.7	197	10.9	197	10.7	197	10.8	196	10.9	200	10.8	196	11.0	197	11.0
200	10.8	213	11.8	212	12.0	210	11.1	200	10.9	215	11.6	213	11.7	212	11.7
213	11.9	217	8.8	218	8.8	219	11.9	212	12.0	221	8.5	213	9.0	218	8.6
218	8.7	228	7.2	237	5.6	239	8.7	225	7.6	246	5.5	237	8.3	238	6.2
238	8.4	251	4.3	263	4.2	253	6.2	250	5.3	271	2.1	258	4.3	257	3.5
251	2.7	270	2.0	282	3.0	273	6.7	273	3.5	300	2.0	280	2.8	281	2.0
270	2.7	300	1.8	306	1.6	308	4.0	305	1.2	326	1.8	320	2.0	325	1.0
301	1.2	325	1.8	328	1.5	329	3.0	328	1.2	350	1.4	343	1.8	345	1.0
325	1.8	350	1.2	358	1.2	359	1.8	350	1.1	375	1.3	350	1.4	350	1.0
350	1.2	375	1.8	378	1.2	379	1.8	375	1.1	400	1.7	375	1.4	375	1.0
375	1.2	400	1.6	400	1.2	400	1.8	400	1.1	425	1.9	400	1.4	400	1.0
400	1.6	425	1.6	425	1.5	425	1.3	425	1.2	450	1.9	425	1.5	425	1.0
425	1.6	450	1.2	450	1.1	425	1.8	450	1.2	475	1.1	450	1.5	450	1.0
450	1.2	475	1.2	475	1.8	450	1.9	475	1.2	475	1.1	475	1.5	475	1.0
475	1.2														

LINE 13

DATE SHVY	710329 26	DATE SHVY	730615 26	DATE SHVY	730713 29	DATE SHVY	730810 30	DATE SHVY	731004 31	DATE SHVY	731206 32	DATE SHVY	740108 33		
183	13.8	183	13.8	183	13.8	183	13.8	183	14.0	183	13.9	183	14.1		
200	10.8	196	11.0	197	10.8	200	11.1	200	11.3	200	11.3	200	11.3		
210	10.9	200	11.1	214	10.9	213	12.0	211	11.4	214	11.5	213	12.0		
215	12.1	212	12.1	220	8.2	223	7.6	225	7.3	219	8.3	219	8.5		
219	9.3	225	7.4	245	5.5	250	6.3	250	6.7	233	6.9	230	7.2		
243	5.8	250	4.0	270	4.4	275	3.8	275	4.6	260	4.1	261	4.6		
260	4.0	275	1.9	300	1.7	300	1.7	300	2.1	287	2.6	285	3.2		
273	2.8	300	1.2	325	1.6	325	1.6	325	1.4	300	2.1	300	1.4		
300	1.3	325	1.2	350	1.2	350	1.2	350	1.3	325	1.4	325	1.4		
325	1.2	350	1.2	375	1.2	375	1.2	375	1.3	350	1.4	350	1.4		
350	1.2	375	1.4	400	1.4	400	1.4	400	1.5	375	1.4	375	1.4		
375	1.4	400	1.4	425	1.4	425	1.4	425	1.5	400	1.4	400	1.4		
400	1.4	425	1.4	450	1.4	450	1.4	450	1.5	475	1.4	475	1.4		
425	1.4	450	1.4	475	1.4	475	1.4	475	1.5	475	1.4	475	1.4		
450	1.4														

LINE 14

DATE 710810 SHVY 10	DATE 710901 SHVY 11	DATE 711007 SHVY 12	DATE 711215 SHVY 13	DATE 720104 SHVY 14	DATE 720209 SHVY 15	DATE 720317 SHVY 16	DATE 720317 SHVY 17
183. 15.5	183. 15.7	183. 15.6	183. 15.7	183. 15.6	183. 15.5	183. 14.7	183. 15.5
200. 9.3	200. 9.4	200. 9.5	200. 9.9	200. 9.5	200. 9.5	200. 6.7	200. 9.8
204. 8.7	204. 8.8	213. 10.1	206. 9.0	206. 9.0	215. 10.1	214. 9.3	206. 9.0
211. 10.3	215. 10.1	230. 7.9	215. 10.2	214. 10.1	225. 8.6	233. 6.9	214. 10.7
226. 9.1	227. 8.1	226. 7.5	226. 8.5	229. 8.1	250. 6.0	259. 3.2	237. 6.4
231. 7.1	232. 6.7	250. 5.5	250. 5.8	254. 5.2	275. 3.5	283. 1.3	269. 2.6
237. 5.8	240. 5.4	240. 5.4	275. 3.8	274. 2.5	300. 1.6	325. 0.7	280. 2.0
247. 5.3	248. 2.8	300. 2.0	325. 2.8	325. 1.4	350. 0.3	350. 0.3	325. 1.7
254. 4.5	325. 2.8	350. 1.1	350. 1.5	350. 0.4	375. 0.0	375. 0.0	350. 0.1
300. 2.2	350. 1.1	350. 0.2	375. 1.1	375. 0.1	400. 0.0	400. 0.0	375. 0.2
325. 0.7	375. 0.6	375. 0.2	400. 0.0	400. 0.0	425. 0.0	425. 0.0	400. 0.2
350. 0.5	400. 1.4	400. 0.0	425. 0.6	425. 0.6	450. 0.0	450. 0.0	425. 0.1
375. 1.4	425. 2.1	425. 0.0	425. 0.6	425. 0.6	475. 0.0	475. 0.0	450. 0.1
400. 2.0	450. 2.8	425. 0.0	450. 2.6	450. 2.6	500. 0.0	500. 0.0	475. 0.2

LINE 14

DATE 720609 SHVY 18	DATE 720625 SHVY 19	DATE 720805 SHVY 20	DATE 720929 SHVY 21	DATE 721211 SHVY 22	DATE 730116 SHVY 23	DATE 730215 SHVY 24	DATE 730316 SHVY 25
183. 15.5	183. 15.5	183. 15.5	183. 15.4	183. 15.5	183. 15.6	183. 15.4	183. 15.5
197. 10.2	200. 9.5	200. 9.6	201. 9.3	200. 9.7	185. 14.8	200. 9.6	187. 18.2
207. 9.0	212. 10.5	213. 11.1	215. 11.0	213. 10.8	197. 10.0	214. 10.8	200. 10.2
215. 10.6	224. 8.9	233. 7.3	233. 7.1	227. 8.4	206. 9.5	231. 7.9	207. 8.7
228. 8.7	233. 6.7	255. 5.8	257. 6.1	250. 6.1	213. 11.1	254. 6.0	216. 10.8
235. 6.5	255. 5.5	278. 3.9	287. 6.4	275. 4.1	222. 9.5	277. 4.2	268. 9.0
247. 5.3	277. 4.1	300. 2.5	300. 4.2	300. 2.2	233. 7.3	300. 2.8	247. 7.1
254. 4.5	300. 3.1	325. 1.2	325. 1.6	325. 1.3	250. 5.4	325. 1.4	272. 5.2
273. 5.1	325. 2.3	350. 0.2	350. 0.5	350. 0.4	288. 5.2	350. 0.7	300. 2.9
300. 3.3	350. 0.6	375. 0.2	375. 0.1	375. 0.4	300. 3.8	375. 0.1	300. 1.7
325. 2.0	375. 0.1	400. 0.0	400. 0.0	400. 0.0	325. 1.8	400. 0.0	325. 0.9
350. 0.3	400. 0.0	425. 0.0	425. 0.0	425. 0.0	375. 0.3	425. 0.0	350. 0.2
400. 0.0	425. 0.0	450. 0.0	425. 0.0	425. 0.0	400. 0.0	450. 0.0	400. 0.2
425. 0.0	450. 0.0	450. 0.0	425. 0.0	450. 0.0	425. 0.0	450. 0.0	425. 0.0
450. 0.0	450. 0.0	450. 0.0	450. 0.0	450. 0.0	450. 0.0	450. 0.0	450. 0.0

LINE 14

DATE 730205 SRVY 14	DATE 730205 SRVY 14	DATE 730305 SRVY 15	DATE 740402 SRVY 36	DATE 740531 SRVY 37	DATE 740816 SRVY 38	DATE 731008 SRVY 31	DATE 731206 SRVY 32	DATE 740108 SRVY 33
183. 15.4	183. 15.4	183. 15.2	183. 15.1	183. 15.0	183. 15.1	183. 15.4	183. 15.0	183. 15.1
207. 9.6	200. 9.4	200. 9.4	200. 9.6	200. 10.0	200. 9.8	185. 10.9	185. 14.6	146. 10.0
207. 9.2	210. 21.2	210. 21.2	214. 11.8	210. 11.7	214. 11.6	200. 9.8	200. 9.5	200. 9.5
215. 11.1	233. 7.6	233. 7.6	238. 6.6	228. 9.1	237. 7.1	213. 11.2	213. 11.0	213. 11.0
240. 240.	240. 4.3	240. 5.7	245. 4.7	250. 5.0	240. 5.4	250. 7.9	230. 7.7	228. 8.5
261. 5.3	282. 2.4	269. 2.4	282. 2.6	320. 3.0	260. 3.0	275. 5.7	260. 5.0	255. 5.3
241. 4.0	300. 1.7	300. 3.0	300. 3.0	300. 2.8	300. 2.9	283. 3.7	280. 3.0	266. 2.1
300. 2.7	325. 1.6	325. 1.6	325. 1.6	325. 1.4	325. 1.4	300. 2.4	300. 2.1	300. 1.9
325. 1.3	350. 1.4	350. 1.4	350. 1.4	350. 1.2	350. 1.2	325. 1.5	325. 1.4	325. 1.4
350. 1.4	375. 1.1	375. 1.1	375. 1.1	375. 1.0	375. 1.0	350. 0.0	350. 0.0	350. 0.0
375. 1.4	400. 1.0	400. 1.0	400. 1.0	400. 1.3	400. 1.3	375. 0.8	375. 0.8	375. 0.8
400. 1.1	425. 0.7	425. 0.7	425. 0.7	425. 0.6	425. 0.6	400. 1.6	400. 1.6	400. 1.6
425. 1.4	450. 1.7	450. 1.7	450. 1.7	450. 2.1	450. 2.1	425. 1.6	425. 1.6	425. 1.6
450. 2.4	475. 2.6	475. 2.6	475. 2.6	475. 2.8	475. 2.8	425. 1.6	425. 1.6	425. 1.6

LINE 14

DATE 740205 SRVY 14	DATE 740305 SRVY 15	DATE 740402 SRVY 36	DATE 740531 SRVY 37	DATE 740816 SRVY 38	DATE 741001 SRVY 39	DATE 741204 SRVY 40	DATE 741204 SRVY 40
183. 15.4	183. 14.9	183. 15.1	183. 15.0	183. 15.1	183. 15.2	183. 15.0	183. 15.0
200. 9.6	200. 9.5	200. 9.6	200. 10.0	200. 9.8	200. 10.1	190. 9.9	190. 9.9
211. 11.4	219. 10.8	214. 11.8	210. 11.7	214. 11.6	200. 10.0	200. 10.0	200. 9.7
237. 7.5	245. 6.1	238. 6.6	228. 9.1	237. 7.1	213. 11.6	211. 11.6	211. 11.6
244. 244.	273. 3.3	282. 4.7	250. 5.0	240. 5.4	250. 6.6	240. 5.4	240. 5.4
280. 280.	300. 1.7	285. 2.6	320. 3.0	300. 2.8	275. 6.1	280. 3.0	280. 3.0
280. 280.	325. 1.3	325. 1.3	325. 1.3	325. 1.2	300. 3.6	300. 3.6	300. 3.6
325. 1.9	375. 1.1	375. 1.1	375. 1.1	375. 1.0	325. 1.0	325. 1.0	325. 1.0
325. 1.1	400. 1.5	400. 1.5	400. 1.5	400. 1.3	350. 0.5	350. 0.5	350. 0.5
350. 1.5	425. 2.0	425. 2.0	425. 2.0	425. 1.8	400. 0.5	400. 0.5	400. 0.5
375. 2.6	450. 2.6	450. 2.6	450. 2.6	450. 2.2	425. 0.9	425. 0.9	425. 0.9
425. 1.3	475. 3.0	475. 3.0	475. 3.0	475. 3.1	450. 1.9	450. 1.9	450. 1.9
467. 2.6	475. 2.6	475. 2.6	475. 2.6	475. 2.8	475. 3.0	475. 3.0	475. 3.0

LINE 15

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 701116
2 | 701215
3 | 710118
4 | 710210
5 | 710310
6 | 710409
7 | 710511
8 | 710608
9 | 710608
9 | 710608
9 | 710608
9 |
| 153 | 153 | 1406 | 1405 | 153 | 1405 | 153 | 1402 | 153 | 1402 | 153 |
| 166 | 163 | 1106 | 1068 | 163 | 1103 | 167 | 1068 | 175 | 909 | 163 |
| 195 | 175 | 906 | 1000 | 175 | 1000 | 175 | 904 | 195 | 900 | 178 |
| 200 | 1004 | 1966 | 902 | 194 | 190 | 190 | 900 | 200 | 1003 | 195 |
| 210 | 1004 | 2000 | 1000 | 200 | 1000 | 200 | 1000 | 200 | 1000 | 200 |
| 211 | 709 | 211 | 1005 | 208 | 1005 | 208 | 1007 | 200 | 1007 | 200 |
| 240 | 504 | 213 | 708 | 213 | 705 | 205 | 708 | 211 | 800 | 209 |
| 258 | 502 | 244 | 707 | 213 | 705 | 225 | 600 | 225 | 604 | 211 |
| 266 | 277 | 266 | 509 | 244 | 501 | 250 | 600 | 225 | 604 | 225 |
| 277 | 407 | 278 | 106 | 250 | 305 | 275 | 105 | 250 | 401 | 250 |
| 300 | 106 | 308 | 102 | 275 | 204 | 300 | 005 | 300 | 203 | 275 |
| 320 | 106 | 320 | 002 | 300 | 100 | 300 | 006 | 300 | 100 | 300 |
| 350 | 020 | 350 | 003 | 350 | 002 | 350 | 006 | 350 | 006 | 350 |
| 375 | 375 | 375 | 003 | 375 | 003 | 375 | 006 | 375 | 006 | 375 |
| 400 | 400 | 400 | 003 | 400 | 003 | 400 | 006 | 400 | 006 | 400 |
| 425 | 425 | 425 | 003 | 425 | 003 | 425 | 006 | 425 | 006 | 425 |
| 450 | 450 | 450 | 003 | 450 | 003 | 450 | 006 | 450 | 006 | 450 |

LINE 15

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 710810
10 | 710901
11 | 711007
12 | 711215
13 | 720104
14 | 720209
15 | 720317
16 | 720417
17 | 720417
17 | 720417
17 | 720417
17 |
| 153 | 153 | 1401 | 1001 | 153 | 1402 | 153 | 1400 | 153 | 1400 | 153 |
| 166 | 178 | 178 | 906 | 166 | 1006 | 162 | 1100 | 163 | 1100 | 163 |
| 178 | 195 | 190 | 900 | 191 | 903 | 187 | 905 | 186 | 901 | 180 |
| 198 | 206 | 205 | 1007 | 204 | 1006 | 196 | 903 | 203 | 1000 | 190 |
| 200 | 1004 | 215 | 707 | 209 | 605 | 204 | 1007 | 203 | 1000 | 200 |
| 206 | 1009 | 240 | 607 | 234 | 605 | 204 | 1007 | 203 | 1000 | 200 |
| 213 | 708 | 261 | 503 | 241 | 308 | 235 | 404 | 252 | 100 | 203 |
| 219 | 603 | 280 | 501 | 266 | 202 | 260 | 207 | 262 | 100 | 205 |
| 255 | 602 | 300 | 200 | 280 | 102 | 300 | 101 | 300 | 003 | 250 |
| 280 | 209 | 320 | 101 | 300 | 101 | 300 | 006 | 300 | 003 | 275 |
| 300 | 002 | 345 | 100 | 325 | 005 | 350 | 006 | 350 | 006 | 300 |
| 325 | 007 | 370 | 105 | 350 | 007 | 375 | 006 | 375 | 006 | 325 |
| 350 | 007 | 400 | 003 | 375 | 006 | 400 | 006 | 400 | 006 | 375 |
| 400 | 007 | 425 | 003 | 425 | 006 | 425 | 006 | 425 | 006 | 400 |
| 400 | 007 | 450 | 003 | 450 | 006 | 450 | 006 | 450 | 006 | 400 |

LINE 15

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 720609 | 720625 | 720605 | 720629 | 721211 | 730116 | 730215 | 730116 | 730108 | 731206 | 740108 | 730116 | 730116 |
| 16 | 19 | 20 | 21 | 22 | 23 | 24 | 23 | 31 | 32 | 33 | 25 | 25 |
| 153 | 14.0 | 152 | 14.0 | 153 | 13.9 | 153 | 14.1 | 153 | 14.1 | 153 | 14.1 | 153 |
| 184 | 11.5 | 164 | 16.9 | 165 | 11.0 | 173 | 10.2 | 164 | 16.9 | 174 | 10.2 | 164 |
| 194 | 9.0 | 190 | 9.1 | 175 | 9.8 | 200 | 11.0 | 187 | 9.1 | 195 | 9.1 | 195 |
| 204 | 10.5 | 204 | 10.7 | 194 | 9.1 | 205 | 9.1 | 200 | 10.6 | 200 | 10.6 | 200 |
| 205 | 8.3 | 203 | 8.6 | 206 | 10.6 | 230 | 5.4 | 211 | 7.6 | 211 | 7.6 | 211 |
| 208 | 7.9 | 225 | 5.7 | 239 | 8.3 | 255 | 3.6 | 234 | 5.3 | 235 | 5.3 | 235 |
| 209 | 6.8 | 250 | 3.2 | 250 | 6.0 | 270 | 2.4 | 260 | 3.5 | 261 | 3.7 | 261 |
| 235 | 0.2 | 275 | 2.1 | 275 | 3.7 | 300 | 1.3 | 281 | 2.4 | 288 | 1.3 | 288 |
| 285 | 3.7 | 300 | 1.3 | 300 | 1.2 | 325 | 0.3 | 300 | 1.6 | 300 | 1.6 | 300 |
| 278 | 1.3 | 325 | 0.4 | 325 | 0.6 | 350 | 0.1 | 325 | 0.4 | 325 | 0.4 | 325 |
| 300 | 0.1 | 350 | 0.4 | 350 | 0.6 | 375 | 0.1 | 350 | 0.4 | 375 | 0.4 | 375 |
| 325 | 0.2 | 375 | -1.3 | 375 | 0.1 | 400 | 0.1 | 375 | 0.3 | 375 | 0.3 | 375 |
| 350 | 0.6 | 400 | -2.8 | 400 | 0.9 | 425 | -2.9 | 400 | 0.4 | 400 | 0.4 | 400 |
| 375 | -1.2 | 425 | -2.6 | 425 | 0.2 | 450 | -2.6 | 425 | 0.2 | 450 | -2.6 | 450 |
| 400 | -1.0 | 450 | -2.7 | 450 | -2.9 | 475 | -2.9 | 450 | -2.6 | 475 | -2.6 | 475 |
| 430 | -2.7 | 475 | -2.7 | 475 | -2.9 | 500 | -2.9 | 475 | -2.6 | 500 | -2.6 | 500 |
| 450 | -2.7 | 500 | -2.7 | 500 | -2.9 | 525 | -2.9 | 500 | -2.6 | 525 | -2.6 | 525 |

LINE 15

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 730129 | 730116 | 730615 | 730713 | 730810 | 731008 | 731206 | 731008 | 731206 | 740108 | 740108 | 730116 | 730116 |
| 26 | 27 | 28 | 29 | 30 | 31 | 32 | 31 | 32 | 33 | 33 | 25 | 25 |
| 153 | 14.1 | 153 | 14.2 | 153 | 14.0 | 153 | 14.1 | 153 | 14.1 | 153 | 14.1 | 153 |
| 184 | 11.5 | 171 | 10.3 | 188 | 10.5 | 194 | 10.2 | 189 | 10.1 | 189 | 10.1 | 189 |
| 194 | 9.0 | 196 | 9.6 | 196 | 9.5 | 194 | 9.3 | 187 | 9.1 | 195 | 9.1 | 195 |
| 204 | 10.6 | 200 | 10.6 | 200 | 10.7 | 200 | 10.9 | 200 | 11.1 | 200 | 11.1 | 200 |
| 205 | 8.3 | 200 | 8.5 | 213 | 7.1 | 205 | 8.6 | 215 | 8.0 | 208 | 8.0 | 208 |
| 208 | 7.9 | 225 | 5.2 | 235 | 5.5 | 234 | 5.2 | 235 | 6.6 | 225 | 6.6 | 225 |
| 209 | 6.8 | 250 | 3.1 | 250 | 4.1 | 264 | 5.5 | 260 | 3.8 | 250 | 4.1 | 250 |
| 235 | 0.2 | 275 | 1.1 | 275 | 2.8 | 292 | 1.7 | 285 | 1.9 | 275 | 2.0 | 275 |
| 285 | 3.7 | 300 | 1.1 | 300 | 1.2 | 300 | 0.7 | 300 | 1.2 | 300 | 1.2 | 300 |
| 278 | 1.3 | 325 | 0.0 | 325 | 0.2 | 325 | 0.5 | 325 | 0.2 | 325 | 0.5 | 325 |
| 300 | 0.1 | 350 | 0.0 | 350 | -1.4 | 350 | -1.1 | 350 | 0.6 | 350 | 0.6 | 350 |
| 325 | 0.2 | 375 | -2.0 | 375 | -1.9 | 375 | -1.7 | 375 | 0.6 | 375 | 0.6 | 375 |
| 350 | 0.6 | 400 | -2.8 | 400 | -2.6 | 400 | -2.6 | 400 | 0.4 | 400 | 0.4 | 400 |
| 375 | -1.2 | 425 | -2.6 | 425 | -2.6 | 425 | -2.6 | 425 | 0.4 | 425 | 0.4 | 425 |
| 400 | -1.0 | 450 | -2.7 | 450 | -2.9 | 450 | -2.9 | 450 | 0.4 | 450 | 0.4 | 450 |
| 430 | -2.7 | 475 | -2.7 | 475 | -2.9 | 475 | -2.9 | 475 | 0.4 | 475 | 0.4 | 475 |
| 450 | -2.7 | 500 | -2.7 | 500 | -2.9 | 500 | -2.9 | 500 | 0.4 | 500 | 0.4 | 500 |

LTNE 16

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 710810 | 710901 | 711007 | 711215 | 720104 | 720209 | 720317 | 720417 | | |
| 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | | |
| 139 | 154 | 153 | 139 | 139 | 154 | 139 | 154 | 139 | 161 |
| 141 | 157 | 166 | 155 | 153 | 100 | 155 | 144 | 155 | 147 |
| 157 | 162 | 170 | 170 | 178 | 81 | 170 | 95 | 180 | 95 |
| 158 | 168 | 181 | 186 | 186 | 71 | 195 | 59 | 200 | 52 |
| 183 | 199 | 200 | 200 | 200 | 42 | 200 | 56 | 225 | 28 |
| 193 | 225 | 64 | 42 | 425 | 240 | 225 | 36 | 250 | 540 |
| 200 | 540 | 212 | 44 | 250 | 140 | 250 | 17 | 275 | 45 |
| 208 | 533 | 47 | 275 | 275 | 44 | 275 | 48 | 300 | 48 |
| 233 | 258 | 45 | 283 | 275 | 44 | 275 | 48 | 300 | 48 |
| 239 | 263 | 12 | 287 | 275 | 44 | 275 | 48 | 300 | 48 |
| 273 | 273 | 9 | 320 | 320 | 42 | 320 | 42 | 320 | 42 |
| 279 | 314 | 11 | 320 | 320 | 42 | 320 | 42 | 320 | 42 |
| 300 | 339 | 11 | 350 | 350 | 115 | 375 | 11 | 400 | 11 |
| 325 | 350 | 11 | 375 | 375 | 117 | 400 | 11 | 400 | 11 |
| 325 | 350 | 11 | 375 | 375 | 117 | 400 | 11 | 400 | 11 |
| 350 | 389 | 11 | 400 | 400 | 224 | 400 | 224 | 400 | 224 |
| 350 | 400 | 11 | 400 | 400 | 224 | 400 | 224 | 400 | 224 |
| 400 | 400 | 11 | 400 | 400 | 224 | 400 | 224 | 400 | 224 |
| 400 | 400 | 11 | 400 | 400 | 224 | 400 | 224 | 400 | 224 |

LTNE 16

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 720004 | 720625 | 720805 | 720929 | 721211 | 730116 | 730215 | 730316 | | |
| 16 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | | |
| 139 | 154 | 155 | 155 | 139 | 154 | 139 | 155 | 139 | 155 |
| 140 | 156 | 147 | 99 | 158 | 100 | 157 | 155 | 157 | 155 |
| 150 | 172 | 100 | 104 | 167 | 100 | 167 | 102 | 167 | 102 |
| 176 | 176 | 141 | 72 | 187 | 68 | 169 | 84 | 160 | 77 |
| 181 | 200 | 51 | 170 | 200 | 58 | 178 | 61 | 200 | 62 |
| 200 | 225 | 310 | 225 | 225 | 318 | 200 | 41 | 225 | 42 |
| 219 | 250 | 14 | 233 | 250 | 212 | 225 | 245 | 250 | 246 |
| 233 | 275 | 53 | 257 | 275 | 140 | 250 | 29 | 275 | 145 |
| 259 | 275 | 145 | 275 | 300 | 140 | 300 | 48 | 300 | 46 |
| 280 | 300 | 145 | 300 | 325 | 40 | 325 | 42 | 325 | 40 |
| 300 | 325 | 140 | 325 | 350 | 46 | 350 | 48 | 350 | 47 |
| 325 | 350 | 140 | 350 | 375 | 46 | 375 | 48 | 375 | 47 |
| 350 | 400 | 140 | 375 | 400 | 119 | 400 | 119 | 400 | 119 |
| 400 | 400 | 140 | 400 | 400 | 227 | 400 | 227 | 400 | 227 |
| 400 | 400 | 140 | 400 | 400 | 227 | 400 | 227 | 400 | 227 |
| 400 | 400 | 140 | 400 | 400 | 227 | 400 | 227 | 400 | 227 |

LINE 17

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 701116 | 701216 | 710118 | 710210 | 710210 | 710310 | 710409 | 710511 | 710608 | |
| 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | |
| 124 | 17.1 | 124 | 17.1 | 124 | 17.0 | 124 | 17.0 | 124 | 16.9 |
| 137 | 13.5 | 148 | 14.2 | 139 | 14.2 | 139 | 14.0 | 140 | 13.7 |
| 145 | 9.9 | 142 | 10.2 | 144 | 10.2 | 148 | 10.1 | 147 | 10.1 |
| 162 | 9.0 | 179 | 9.3 | 150 | 10.2 | 160 | 10.4 | 165 | 10.0 |
| 166 | 7.6 | 194 | 5.2 | 175 | 6.6 | 166 | 7.4 | 171 | 7.9 |
| 188 | 6.2 | 225 | 5.7 | 200 | 6.3 | 175 | 6.7 | 185 | 6.3 |
| 209 | 5.6 | 219 | 7.1 | 285 | 4.0 | 200 | 5.0 | 200 | 5.9 |
| 236 | 4.9 | 243 | 4.0 | 250 | 1.4 | 225 | 4.9 | 242 | 4.4 |
| 255 | 3.4 | 268 | 1.2 | 275 | 3.2 | 243 | 5.1 | 258 | 2.6 |
| 280 | 1.1 | 325 | -2.6 | 300 | 1.4 | 250 | 4.0 | 275 | 1.1 |
| 300 | -1.0 | 325 | -1.5 | 325 | 1.4 | 275 | 1.5 | 300 | 1.0 |
| 315 | -1.6 | 335 | -2.7 | 350 | 1.5 | 325 | 1.6 | 300 | 1.7 |
| | | | | 350 | 1.5 | 350 | 1.6 | 325 | 1.7 |
| | | | | 375 | 1.5 | 350 | 1.6 | 325 | 1.7 |
| | | | | 375 | 1.5 | 350 | 1.6 | 325 | 1.7 |

LINE 17

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 710810 | 710901 | 711007 | 711215 | 720104 | 720209 | 720317 | 720417 | | |
| 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | | |
| 154 | 16.6 | 124 | 16.7 | 124 | 16.9 | 123 | 16.6 | 124 | 16.8 |
| 160 | 14.3 | 134 | 14.2 | 134 | 13.1 | 137 | 13.4 | 135 | 13.4 |
| 164 | 10.0 | 158 | 10.3 | 158 | 10.2 | 155 | 10.0 | 157 | 10.4 |
| 165 | 8.0 | 165 | 8.4 | 162 | 7.6 | 165 | 7.0 | 165 | 10.7 |
| 184 | 6.2 | 187 | 4.3 | 187 | 4.3 | 191 | 4.3 | 181 | 5.8 |
| 195 | 6.6 | 200 | 3.6 | 200 | 2.6 | 200 | 3.7 | 200 | 3.0 |
| 200 | 6.7 | 195 | 7.1 | 225 | 2.2 | 225 | 2.0 | 225 | 1.8 |
| 212 | 7.0 | 200 | 6.2 | 225 | 1.3 | 225 | 2.0 | 225 | 1.7 |
| 224 | 6.7 | 225 | 3.1 | 250 | 1.3 | 250 | 1.4 | 250 | 1.6 |
| 254 | 2.7 | 250 | 3.1 | 275 | 1.5 | 275 | 0.0 | 275 | 1.1 |
| 279 | 1.2 | 250 | 1.7 | 300 | 1.9 | 300 | 1.6 | 300 | 1.9 |
| 300 | 1.2 | 300 | -1.0 | 325 | -1.9 | 325 | -1.5 | 325 | 1.6 |
| 325 | -1.2 | 300 | -2.6 | 350 | -3.1 | 350 | -1.9 | 350 | 1.9 |
| 350 | -2.6 | 400 | -2.7 | 375 | -3.1 | 375 | -2.5 | 375 | 1.9 |

LINE 17

DATE 720625 SRVY 18	DATE 720625 SRVY 19	DATE 720625 SRVY 20	DATE 720625 SRVY 21	DATE 721211 SRVY 22	DATE 730116 SRVY 23	DATE 730215 SRVY 24	DATE 710316 SRVY 25
124	16.8	123	16.9	124	16.8	123	16.6
136	14.1	138	14.1	137	13.8	136	13.7
137	10.5	146	10.5	147	10.5	146	10.5
145	10.5	145	10.5	145	10.5	145	10.5
157	19.0	153	18.9	154	18.9	154	18.9
162	5.8	178	6.3	172	6.3	174	6.4
183	4.7	184	4.7	186	4.7	184	4.7
200	2.0	200	2.0	200	2.0	200	2.0
225	5.5	225	4.5	215	4.5	216	4.5
250	2.8	242	2.8	225	2.8	225	2.4
275	1.6	275	1.7	275	1.6	275	1.5
300	5	300	1.1	300	5	300	5
325	1.8	325	1.1	325	1.8	325	1.8
350	1.8	350	1.1	350	1.8	325	1.4
375	2.7	375	2.6	375	2.7	350	2.7

LINE 17

DATE 730129 SRVY 26	DATE 730713 SRVY 29	DATE 730810 SRVY 30	DATE 731004 SRVY 31	DATE 740108 SRVY 33	DATE 740205 SRVY 34
124	16.6	123	16.8	123	16.6
136	14.2	139	14.4	139	13.7
146	10.4	146	10.5	146	14.2
156	10.5	158	10.5	154	10.4
166	9.0	162	8.1	160	8.1
200	4.1	189	4.5	200	4.5
225	2.2	200	2.5	225	2.5
250	0.4	225	0.4	250	0.4
275	0.0	275	0.0	275	0.0
300	0.7	300	0.7	300	0.7
325	1.2	325	1.2	325	1.2
350	1.2	350	1.2	350	1.2
375	3.4	375	3.4	375	3.4

LINE 17

DATE SRVY	740305 SRVY	DATE SRVY	740402 SRVY	DATE SRVY	740531 SRVY	DATE SRVY	740816 SRVY	DATE SRVY	741001 SRVY	DATE SRVY	741205 SRVY
123	123	123	123	123	123	124	124	124	124	124	124
145	145	145	145	145	145	145	145	145	145	145	145
167	167	167	167	167	167	167	167	167	167	167	167
189	189	189	189	189	189	189	189	189	189	189	189
211	211	211	211	211	211	211	211	211	211	211	211
233	233	233	233	233	233	233	233	233	233	233	233
255	255	255	255	255	255	255	255	255	255	255	255
277	277	277	277	277	277	277	277	277	277	277	277
300	300	300	300	300	300	300	300	300	300	300	300
325	325	325	325	325	325	325	325	325	325	325	325
350	350	350	350	350	350	350	350	350	350	350	350
375	375	375	375	375	375	375	375	375	375	375	375

LINE 18

DATE SRVY	70116 SRVY	DATE SRVY	701216 SRVY	DATE SRVY	710118 SRVY	DATE SRVY	710210 SRVY	DATE SRVY	710310 SRVY	DATE SRVY	710409 SRVY	DATE SRVY	710511 SRVY	DATE SRVY	710608 SRVY
170	170	170	170	170	170	170	170	170	170	170	170	170	170	170	170
145	145	145	145	145	145	145	145	145	145	145	145	145	145	145	145
163	163	163	163	163	163	163	163	163	163	163	163	163	163	163	163
194	194	194	194	194	194	194	194	194	194	194	194	194	194	194	194
200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200
223	223	223	223	223	223	223	223	223	223	223	223	223	223	223	223
260	260	260	260	260	260	260	260	260	260	260	260	260	260	260	260
285	285	285	285	285	285	285	285	285	285	285	285	285	285	285	285
310	310	310	310	310	310	310	310	310	310	310	310	310	310	310	310
335	335	335	335	335	335	335	335	335	335	335	335	335	335	335	335
145	145	145	145	145	145	145	145	145	145	145	145	145	145	145	145
165	165	165	165	165	165	165	165	165	165	165	165	165	165	165	165

LINE 18

DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY
710810 10	710901 11	711007 12	711215 13	720104 14	720209 15	720320 16	720417 17
170. 181. 184. 200. 225. 233. 256. 283. 300. 329. 350.	14.8 19.3 20.9 234. 259. 264. 300. 329. 350.	14.8 170. 13.3 192. 191. 218. 219. 284. 2.2 2.2 3.0 3.7	14.7 170. 17.1 193. 200. 225. 250. 275. 300. 329. 350.	14.7 170. 12.3 181. 193. 200. 225. 250. 275. 300. 329. 350.	14.7 170. 12.5 181. 193. 200. 225. 250. 275. 300. 329. 350.	14.9 170. 12.5 182. 191. 200. 225. 250. 275. 300. 329. 350.	14.8 185. 190. 200. 225. 250. 275. 300. 329. 350.

LINE 18

DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY
720609 16	720625 19	720805 20	720829 21	721211 22	730116 23	730215 24	730316 25
170. 170. 170. 181. 200. 225. 250. 275. 300. 329. 350.	15.0 13.8 185. 208. 225. 234. 251. 275. 300. 329. 350.	14.9 14.0 177. 206. 208. 212. 217. 258. 280. 300. 325. 350.	14.9 170. 18.9 185. 200. 225. 250. 275. 300. 329. 350.	14.9 170. 14.9 189. 208. 225. 250. 275. 300. 329. 350.	15.0 170. 14.2 176. 181. 200. 225. 250. 275. 300. 329. 350.	14.9 170. 13.9 181. 193. 200. 225. 250. 275. 300. 329. 350.	14.9 170. 17.8 181. 200. 225. 250. 275. 300. 329. 350.

LINE 18

DATE 730329 SRVY 26	DATE 730416 SRVY 27	DATE 730615 SRVY 28	DATE 730713 SRVY 29	DATE 730810 SRVY 30	DATE 731009 SRVY 31	DATE 731206 SRVY 32	DATE 740108 SRVY 33
170. 15.0	170. 15.0	170. 15.0	170. 15.0	170. 14.9	170. 15.1	170. 11.2	170. 11.5
177. 16.1	177. 16.7	175. 16.0	174. 16.4	174. 16.9	175. 14.1	176. 7.0	175. 7.0
183. 6.1	183. 6.1	183. 6.7	183. 6.1	183. 6.1	183. 6.6	189. 4.5	205. 7.3
200. 3.4	200. 4.2	200. 4.3	200. 4.7	200. 4.6	200. 4.5	200. 3.7	216. 2.6
225. 2.0	225. 2.6	225. 2.4	225. 2.9	225. 4.0	225. 2.7	225. 2.3	250. 1.4
250. 2.0	250. 2.7	250. 1.2	250. 1.8	250. 3.2	255. 1.2	250. 1.2	275. 1.8
275. 4.4	275. 4.2	275. 4.7	275. 1.1	275. 1.6	275. 1.7	275. 1.2	300. 1.0
300. 4.6	300. 3.3	300. 3.0	300. 4.2	300. 1.5	300. 4.2	300. 1.0	325. 1.0
325. 1.3	325. 4.6	325. 1.0	325. 4.6	325. 4.2	325. 4.2	325. 1.0	350. 2.1
350. 1.9	350. 1.6	350. 1.7	350. 1.6	350. 2.3	350. 1.5	325. 2.7	375. 3.0
375. 2.9	375. 2.8	375. 2.2	375. 2.3	375. 2.5	375. 2.6		
400. 4.0	400. 4.0	400. 4.0	400. 4.0				

LINE 18

DATE 740205 SRVY 34	DATE 740305 SRVY 35	DATE 740402 SRVY 36	DATE 740531 SRVY 37	DATE 740816 SRVY 38	DATE 741001 SRVY 39	DATE 741205 SRVY 40
170. 11.9	170. 12.0	170. 9.5	170. 10.0	170. 7.6	165. 12.4	167. 14.9
176. 6.0	176. 7.4	180. 6.5	180. 7.0	180. 13.3	168. 13.3	175. 8.2
192. 7.8	200. 5.9	200. 6.3	204. 7.0	198. 14.0	178. 7.5	200. 4.5
200. 7.2	225. 4.9	221. 6.0	230. 4.0	209. 7.4	209. 7.3	225. 2.1
208. 7.8	250. 3.4	250. 2.1	255. 2.3	200. 6.1	217. 6.5	250. 1.4
250. 5.2	275. 4.4	275. 1.0	283. 1.2	225. 5.9	225. 4.6	275. 1.6
250. 3.3	300. 1.4	300. 1.1	300. 1.8	250. 3.0	250. 2.1	300. 1.2
275. 1.2	325. 1.7	325. 1.2	325. 4.4	275. 1.7	275. 1.2	300. 1.2
300. 1.2	350. 1.7	350. 2.1	350. 1.7	300. 4.4	300. 4.4	350. 1.0
325. 4.6	375. 2.0	375. 2.2	375. 2.5	325. 1.4	325. 1.4	375. 2.2
350. 1.7	400. 4.0	400. 2.5	400. 2.7	350. 1.8	350. 1.8	
375. 4.2	425. 3.0	425. 3.0	425. 2.6	400. 1.5	400. 2.0	
400. 4.7			425. 4.2	425. 2.6		

LINE 19

DATE SRVY	701118 2	DATE SRVY	701216 3	DATE SRVY	710118 11	DATE SRVY	710210 5	DATE SRVY	710310 8	DATE SRVY	710409 7	DATE SRVY	710511 8	DATE SRVY	710608 9
158	17.5	158	17.7	158	17.6	158	17.4	158	17.3	158	17.3	158	17.4	158	17.5
165	9.2	166	9.5	166	16.0	168	9.2	168	9.0	168	15.3	166	15.4	170	14.2
200	6.8	209	6.6	186	9.0	193	9.8	189	9.9	189	8.9	186	9.1	187	8.9
208	6.8	213	6.4	200	9.4	210	9.2	200	9.3	191	9.7	192	10.0	192	9.8
235	6.0	246	6.7	209	9.6	217	6.9	210	9.1	200	9.2	200	9.42	200	9.5
245	3.2	273	2.5	215	7.1	225	6.9	219	7.5	210	8.2	205	7.8	200	8.3
280	3.6	325	2.5	228	6.0	235	3.9	228	6.4	215	7.9	225	7.4	215	7.9
325	-1.1	350	-1.8	279	5.8	275	1.7	234	1.5	253	6.9	250	5.5	250	6.0
350	-1.8	375	-2.6	292	3.8	325	-1.4	300	3.0	275	4.9	275	4.9	275	3.8
				305	2.6	350	-0.9	325	3.0	300	3.2	300	3.2	300	1.8
				325	1.4	375	-2.1	350	1.2	325	3.2	325	3.2	325	3.3
				350	-0.8	400	-3.1	375	-2.4	350	-0.9	350	-1.7	350	-0.6
				370	-2.4			400	-2.9	375	-2.1	375	-3.0	375	-1.3
										400	-3.2			400	-2.2
														425	-2.9

LINE 19

DATE SRVY	710810 10	DATE SRVY	710901 11	DATE SRVY	711007 12	DATE SRVY	711215 13	DATE SRVY	720104 14	DATE SRVY	720209 15	DATE SRVY	720120 16	DATE SRVY	720417 17
158	17.2	158	17.4	158	17.4	158	17.3	158	17.3	158	17.2	158	17.3	158	17.3
167	15.3	187	9.0	188	8.8	164	16.0	165	15.8	166	15.3	166	9.5	187	9.3
182	11.2	193	9.8	195	10.0	180	11.4	188	9.1	187	9.1	200	10.1	195	10.3
189	8.9	200	9.5	212	8.6	188	9.1	183	10.0	193	10.0	225	8.4	200	9.9
194	10.0	212	8.6	222	7.2	195	10.1	200	9.7	200	9.7	250	6.1	225	8.4
200	9.5	226	7.3	223	6.7	225	8.6	225	8.5	225	8.5	275	3.4	259	7.6
211	8.9	232	6.1	250	7.1	256	7.6	244	6.7	250	6.5	300	1.8	262	4.8
226	7.5	257	5.2	260	7.1	261	4.6	269	3.6	267	6.7	325	4.6	283	2.9
239	5.6	281	4.5	285	3.9	266	2.6	294	1.6	299	3.3	350	-1.1	300	2.0
261	3.0	300	2.4	300	2.2	300	1.9	300	1.5	300	2.7	375	-1.0	325	1.0
268	2.1	325	-0.1	325	-0.4	325	-0.9	325	1.1	325	1.8	400	-1.6	350	-1.1
300	1.6	350	-1.5	375	-2.7	375	-1.1	350	-0.9	375	-1.5	425	-2.6	400	-1.8
350	-0.8	400	-2.8			400	-2.4	400	-2.2	400	-2.0			425	-2.8
375	-1.9							425	-2.0	419	-2.5				
400	-2.1								-2.0						

LINE 19

DATE SRVY	DATE 720609 SRVY	DATE 720625 SRVY	DATE 720805 SRVY	DATE 720929 SRVY	DATE 721211 SRVY	DATE 730116 SRVY	DATE 730215 SRVY	DATE 730316 SRVY	
156	17.3	156	17.3	158	17.3	158	17.3	158	17.3
161	15.0	167	16.2	161	16.3	161	16.3	161	16.3
168	14.3	183	18.7	194	19.2	194	19.2	194	19.2
184	14.3	193	19.3	221	20.0	220	19.9	220	19.9
190	10.3	216	8.8	233	6.9	235	7.8	235	7.8
200	10.0	235	5.9	258	7.4	250	6.5	250	6.5
217	6.9	257	3.4	278	5.9	275	4.0	275	4.0
226	7.2	277	2.4	278	8.9	300	4.7	250	7.7
250	5.0	300	1.1	300	5.5	300	3.3	269	7.6
275	2.7	325	6.9	325	3.0	325	2.8	300	3.9
291	4.5	350	2.2	350	3.2	350	1.2	300	3.1
300	7	400	2.2	375	1.1	375	3.0	375	1.5
325	7	400	1.3	400	2.2	425	1.9	350	1.2
350	7	425	3.3	425	2.2	450	2.3	375	2.3
375	7	450	1.0	425	2.8	475	1.1	400	2.4
400	7	450	1.9	425	2.8	475	1.1	425	2.5
425	7	450	2.6	425	2.8	475	1.1	450	2.5
450	7	450	2.6	425	2.8	475	1.1	450	2.5

LINE 19

DATE SRVY	DATE 730329 SRVY	DATE 730416 SRVY	DATE 730615 SRVY	DATE 730713 SRVY	DATE 730810 SRVY	DATE 731009 SRVY	DATE 731208 SRVY	DATE 740108 SRVY	
158	17.4	158	17.1	158	17.2	158	17.3	158	17.2
161	17.2	162	17.0	162	17.1	167	16.3	162	16.8
180	9.7	188	9.2	199	9.5	187	10.7	187	10.2
193	10.8	200	10.8	228	10.7	198	8.7	200	10.3
200	19.9	228	7.6	238	7.4	225	10.3	225	8.3
216	8.8	250	7.5	250	7.4	252	7.7	250	7.7
242	7.9	295	5.8	275	5.8	275	6.4	275	6.9
250	4.1	300	5.9	300	6.1	300	5.1	300	5.5
275	4.0	325	5.2	325	6.3	325	2.7	300	2.3
278	3.7	350	3.1	350	3.2	351	1.8	325	2.3
300	4.6	375	1.8	375	1.3	375	1.8	350	1.3
325	3.1	400	1.0	400	1.3	400	1.8	375	1.6
350	1.6	425	1.0	425	1.1	425	1.1	400	1.4
375	1.3	450	2.2	450	2.6	475	1.3	425	1.7
400	1.6	475	2.8	450	2.6	475	1.3	425	1.7
425	1.3	500	2.8	475	2.6	475	1.3	450	2.1
450	1.3	525	2.7	475	2.6	475	1.3	500	2.7
475	1.2								
500	1.2								
525	1.2								

LJME 19

DATE 740205	DATE 740305	DATE 740402	DATE 740531	DATE 740616	DATE 741001	DATE 741205
SRVY 34	SRVY 35	SRVY 36	SRVY 37	SRVY 38	SRVY 39	SRVY 40
158	158	158	158	158	158	158
17.2	17.3	17.2	17.3	17.1	17.2	17.2
161	161	161	161	167	168	168
16.9	17.1	17.1	16.8	15.8	15.7	16.6
181	191	200	191	188	188	200
11.7	9.6	10.7	9.5	10.8	9.6	10.8
190	200	225	200	200	200	225
4.2	10.5	8.5	11.5	10.8	10.9	8.2
195	225	250	225	225	211	250
10.7	8.7	8.0	8.9	8.5	9.0	7.8
200	250	250	250	250	216	275
10.3	7.7	5.8	7.9	7.7	9.0	8.2
528	575	575	575	575	525	575
9.3	6.0	4.6	6.4	5.9	7.7	6.9
208	325	325	325	300	300	300
7.0	7.7	3.1	8.0	6.1	6.8	4.9
225	325	350	350	350	350	350
5.6	7.7	1.9	7.0	9.2	7.7	7.2
300	375	400	400	375	375	375
4.3	11.9	1.4	1.9	3.8	6.9	1.6
325	400	425	400	400	400	400
2.2	7.9	6.6	7.5	11.4	5.2	7.7
350	425	450	425	400	350	450
1.5	7.2	1.6	2.2	5.5	2.9	1.7
375	450	475	450	425	475	475
1.7	6.8	1.6	1.1	6.6	6.8	2.2
400	475	500	475	450	400	450
2	1.9	2.2	1.5	1.0	5.5	2
425	500	525	500	475	425	425
8.4	2.45	2.7	2.1	1.5	4.5	4.5
450	500	525	525	500	450	450
8.9	2.45	2.7	2.5	2.1	2.6	2.6
475	500	525	525	525	475	475
11.3	1.6	1.6	1.6	2.1	1.4	1.4
500	500	500	500	500	500	500
1.8	2.45	2.45	2.45	2.45	2.45	2.45
525	525	525	525	525	525	525
2.45	2.45	2.45	2.45	2.45	2.45	2.45

LINE 20

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 701118
2 | 701216
3 | 710118
4 | 710210
5 | 710310
6 | 710409
7 | 710511
8 | 710604
9 | | |
| 113 | 113 | 113 | 113 | 113 | 113 | 113 | 113 | | |
| 9.8 | 9.6 | 9.6 | 9.8 | 10.2 | 10.1 | 9.9 | 10.0 | | |
| 125 | 125 | 125 | 125 | 8.0 | 125 | 125 | 125 | | |
| 178 | 178 | 178 | 178 | 7.0 | 150 | 150 | 150 | | |
| 178 | 178 | 178 | 178 | 5.0 | 175 | 175 | 175 | | |
| 200 | 200 | 200 | 200 | 4.2 | 192 | 192 | 192 | | |
| 225 | 225 | 225 | 225 | 4.8 | 200 | 200 | 200 | | |
| 250 | 250 | 250 | 250 | 4.9 | 225 | 225 | 225 | | |
| 275 | 275 | 275 | 275 | 4.2 | 250 | 250 | 250 | | |
| 300 | 300 | 300 | 300 | 3.3 | 275 | 275 | 275 | | |
| 325 | 325 | 325 | 325 | 2.7 | 300 | 300 | 300 | | |
| 350 | 350 | 350 | 350 | 2.5 | 325 | 325 | 325 | | |
| 375 | 375 | 375 | 375 | 1.4 | 350 | 350 | 350 | | |
| 400 | 400 | 400 | 400 | 1.5 | 375 | 375 | 375 | | |
| 425 | 425 | 425 | 425 | 1.4 | 400 | 400 | 400 | | |
| 450 | 450 | 450 | 450 | 1.4 | 425 | 425 | 425 | | |
| 475 | 475 | 475 | 475 | 1.6 | 450 | 450 | 450 | | |
| 500 | 500 | 500 | 500 | 1.1 | 475 | 475 | 475 | | |
| 525 | 525 | 525 | 525 | 1.0 | 500 | 500 | 500 | | |
| 550 | 550 | 550 | 550 | 1.5 | 525 | 525 | 525 | | |
| 575 | 575 | 575 | 575 | 1.9 | 550 | 550 | 550 | | |
| 600 | 600 | 600 | 600 | 1.9 | 575 | 575 | 575 | | |
| 625 | 625 | 625 | 625 | 2.4 | 600 | 600 | 600 | | |
| 650 | 650 | 650 | 650 | 3.0 | 625 | 625 | 625 | | |

LINE 20

DATE 710010	DATE 710901	DATE 711007	DATE 711215	DATE 720104	DATE 720209	DATE 720370	DATE 720417
SRVY 10	SRVY 11	SRVY 12	SRVY 13	SRVY 14	SRVY 15	SRVY 16	SRVY 17
113. 8.8	113. 9.9	113. 10.3	113. 10.3	113. 10.4	113. 10.0	113. 10.4	113. 10.4
120. 8.5	125. 7.2	121. 7.5	123. 8.1	121. 8.7	123. 8.7	131. 8.2	131. 8.2
150. 7.6	160. 7.2	167. 7.6	168. 7.5	168. 7.2	173. 8.0	178. 8.5	178. 8.5
165. 5.9	174. 4.9	187. 5.8	185. 4.6	188. 5.0	193. 5.0	198. 5.2	198. 5.2
190. 4.6	200. 4.9	178. 4.7	185. 4.6	168. 4.6	200. 2.6	204. 2.4	163. 3.5
200. 4.6	225. 4.8	189. 4.9	206. 3.3	193. 3.8	225. 2.3	200. 1.9	200. 2.7
220. 4.9	250. 5.0	202. 6.2	225. 1.6	200. 3.3	250. 1.2	225. 1.2	225. 2.0
250. 5.0	275. 5.4	225. 6.6	250. 1.1	225. 2.0	275. 0.1	250. 0.6	250. 1.7
275. 5.4	300. 5.7	238. 6.9	275. 0.0	250. 0.9	300. 0.3	275. 0.1	275. 1.2
300. 5.8	315. 5.4	256. 4.4	300. 0.0	275. 0.4	300. 0.5	300. 0.5	300. 0.5
323. 5.8	350. 2.2	281. 2.6	325. 0.0	300. 0.4	325. 0.1	350. 0.4	325. 0.3
350. 4.0	375. 1.2	300. 2.1	350. 0.0	325. 0.3	350. 0.4	375. 0.4	350. 0.4
375. 1.8	400. 0.8	325. 1.2	375. 0.2	350. 0.3	400. 0.4	400. 0.4	375. 0.4
400. 0.6	425. 0.8	350. 0.2	425. 0.2	375. 0.2	425. 0.4	425. 0.4	400. 0.6
425. 0.7	450. 0.7	375. 0.7	450. 0.7	375. 0.7	450. 0.7	450. 0.7	425. 0.7
450. 1.9	475. 0.9	400. 1.7	475. 0.9	400. 1.7	475. 0.9	475. 0.9	450. 1.9
475. 2.7	475. 2.7	425. 2.6	475. 2.6	425. 2.6	475. 2.6	475. 2.6	475. 2.6

LINE 20

DATE 720009	DATE 720025	DATE 720805	DATE 720929	DATE 721211	DATE 730116	DATE 740215	DATE 740316
SRVY 18	SRVY 19	SRVY 20	SRVY 21	SRVY 22	SRVY 23	SRVY 24	SRVY 25
10.4	10.5	10.5	10.5	10.6	10.5	10.4	10.5
8.6	8.6	118. 118.	118. 118.	118. 118.	118. 118.	118. 118.	118. 118.
120. 8.6	126. 7.3	121. 5.8	120. 7.0	116. 6.8	127. 7.5	110. 8.0	116. 8.0
150. 7.6	174. 4.9	187. 5.8	185. 4.6	188. 5.0	193. 5.0	198. 5.2	198. 5.2
165. 5.9	174. 4.9	187. 5.8	185. 4.6	188. 5.0	193. 5.0	198. 5.2	198. 5.2
190. 4.6	200. 4.9	178. 4.7	206. 3.3	193. 3.8	200. 2.6	204. 2.4	163. 3.5
200. 4.6	225. 4.8	189. 4.9	206. 3.3	193. 3.8	225. 2.3	200. 1.9	200. 2.7
220. 4.9	250. 5.0	202. 6.2	225. 1.6	200. 3.3	250. 1.2	225. 1.2	225. 2.0
250. 5.0	275. 5.4	225. 6.6	250. 1.1	225. 2.0	275. 0.1	250. 0.6	250. 1.7
275. 5.4	300. 5.7	238. 6.9	275. 0.0	250. 0.9	300. 0.3	275. 0.1	275. 1.2
300. 5.8	315. 5.4	256. 4.4	300. 0.0	275. 0.4	300. 0.5	300. 0.5	300. 0.5
323. 5.8	350. 2.2	281. 2.6	325. 0.0	300. 0.4	325. 0.1	350. 0.4	325. 0.3
350. 4.0	375. 1.2	300. 2.1	350. 0.0	325. 0.3	350. 0.4	375. 0.4	350. 0.4
375. 1.8	400. 0.8	325. 1.2	375. 0.2	350. 0.3	400. 0.4	400. 0.4	375. 0.4
400. 0.6	425. 0.8	350. 0.2	425. 0.2	375. 0.2	425. 0.4	425. 0.4	400. 0.6
425. 0.7	450. 0.7	375. 0.7	450. 0.7	375. 0.7	450. 0.7	450. 0.7	425. 0.7
450. 1.9	475. 0.9	400. 1.7	475. 0.9	400. 1.7	475. 0.9	475. 0.9	450. 1.9
475. 2.7	475. 2.7	425. 2.6	475. 2.6	425. 2.6	475. 2.6	475. 2.6	475. 2.6

LINE 20

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 730329 | 730416 | 730615 | 730713 | 730810 | 731009 | 731206 | 740108 |
| 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 |
| 113 | 10.5 | 113 | 10.3 | 113 | 10.3 | 113 | 10.4 |
| 117 | 8.7 | 118 | 7.2 | 115 | 8.1 | 118 | 8.0 |
| 145 | 7.9 | 118 | 7.2 | 115 | 8.1 | 118 | 8.0 |
| 171 | 6.9 | 118 | 7.2 | 115 | 8.1 | 118 | 8.0 |
| 197 | 5.2 | 143 | 5.4 | 138 | 5.8 | 141 | 7.0 |
| 225 | 3.6 | 184 | 3.6 | 163 | 4.9 | 166 | 4.6 |
| 251 | 2.8 | 191 | 1.9 | 186 | 4.1 | 185 | 4.5 |
| 277 | 1.8 | 200 | 1.9 | 200 | 3.7 | 200 | 3.4 |
| 303 | 2.5 | 200 | 3.3 | 200 | 3.7 | 200 | 3.4 |
| 329 | 1.7 | 250 | 1.0 | 225 | 2.6 | 225 | 1.7 |
| 355 | 1.0 | 250 | 1.0 | 250 | 1.0 | 250 | 1.1 |
| 381 | 1.3 | 275 | 1.0 | 275 | 1.0 | 275 | 1.2 |
| 407 | 1.0 | 275 | 1.0 | 275 | 1.0 | 275 | 1.0 |
| 433 | 1.0 | 300 | 1.0 | 300 | 1.0 | 300 | 1.0 |
| 459 | 1.0 | 300 | 1.0 | 300 | 1.0 | 300 | 1.0 |
| 485 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 511 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 537 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 563 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 589 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 615 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 641 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 667 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 693 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 719 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 745 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 771 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 797 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 823 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 849 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 875 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 901 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 927 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 953 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 979 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |
| 1005 | 1.0 | 325 | 1.0 | 325 | 1.0 | 325 | 1.0 |

LINE 20

| DATE
SRVY |
|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 740205 | 740305 | 740402 | 740531 | 740816 | 741001 | 741205 | 741205 |
| 34 | 35 | 36 | 37 | 38 | 39 | 40 | 40 |
| 113 | 10.5 | 113 | 10.6 | 113 | 10.7 | 113 | 11.2 |
| 119 | 8.5 | 117 | 8.7 | 128 | 8.0 | 124 | 8.3 |
| 141 | 6.5 | 145 | 6.9 | 150 | 6.5 | 153 | 6.3 |
| 163 | 5.3 | 171 | 6.0 | 150 | 6.5 | 153 | 6.3 |
| 185 | 3.9 | 197 | 5.4 | 205 | 5.6 | 200 | 6.0 |
| 207 | 2.9 | 225 | 5.2 | 225 | 5.0 | 225 | 5.2 |
| 229 | 4.7 | 250 | 3.6 | 225 | 5.0 | 225 | 5.2 |
| 251 | 3.6 | 275 | 3.2 | 225 | 5.0 | 225 | 5.2 |
| 273 | 1.8 | 275 | 3.2 | 225 | 5.0 | 225 | 5.2 |
| 295 | 1.8 | 300 | 1.7 | 275 | 3.9 | 275 | 4.2 |
| 317 | 1.1 | 300 | 1.7 | 300 | 2.4 | 300 | 3.5 |
| 339 | 2.0 | 300 | 1.7 | 300 | 2.4 | 300 | 3.5 |
| 361 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 383 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 405 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 427 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 449 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 471 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 493 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 515 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 537 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 559 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 581 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 603 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 625 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 647 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 669 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 691 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 713 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 735 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 757 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 779 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 801 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 823 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 845 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 867 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 889 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 911 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 933 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 955 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 977 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |
| 999 | 2.1 | 325 | 1.1 | 325 | 1.3 | 325 | 1.4 |

LINE 21

DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY						
71118 2	7101216 3	710118 4	710210 5	710310 6	710409 7	710511 6	710609 9		
113. 17.2	114. 17.1	113. 17.3	113. 17.4	113. 17.3	113. 16.6	113. 17.2	111. 17.3		
115. 17.6	127. 6.2	9.3 125. 6.2	125. 6.2	7.8 11.6	16.6 11.6	61.9 128. 6.9	125. 7.4		
118. 11.6	154. 6.2	4.3 150. 4.0	4.0 134. 5.7	5.7 12.9	6.4 15.0	5.2 15.0	5.1 175. 4.1		
125. 6.6	169. 3.0	2.4 175. 3.4	3.4 150. 5.0	5.0 15.4	5.2 175. 4.1	4.1 175. 4.1	200. 4.6		
150. 4.5	194. 3.1	3.2 200. 3.5	3.5 200. 3.1	4.0 175. 4.0	4.1 200. 3.6	3.8 200. 3.9	285. 3.9		
175. 1.8	225. 2.5	2.5 225. 3.0	3.0 225. 2.6	3.1 200. 3.1	2.0 3.1	2.5 2.9	250. 4.6		
200. 1.2	250. 2.7	1.9 250. 2.3	2.3 225. 2.6	2.6 225. 2.6	3.1 250. 2.6	2.9 275. 2.1	275. 3.1		
225. 2.4	275. 1.1	2.75 1.2	250. 1.5	250. 2.2	2.5 2.75	1.2 300. 1.2	300. 1.2		
250. 1.4	300. 2.2	1.1 300. 1.9	1.9 275. 1.4	1.4 300. 1.4	1.1 325. 1.1	1.2 325. 1.6	325. 2.2		
275. 1.1	325. 1.6	1.9 325. 1.4	1.4 300. 1.7	1.7 325. 1.7	1.1 325. 1.1	1.2 325. 1.6	350. 2.2		
300. 1.1	350. 1.9	1.9 375. 1.6	1.6 375. 1.2	1.2 375. 1.2	0.0 375. 0.0	1.2 375. 1.2	375. 2.2		
325. 1.8	375. 2.9	2.1 384. 2.1	2.1 384. 1.8	1.8 400. 1.8	0.0 395. 0.0	1.2 395. 1.2	400. 2.2		
350. 1.1	400. 3.0		384. 1.8	400. 1.8	0.0 400. 0.0	1.2 400. 1.2	411. 3.0		
375. 2.3			400. 3.0	400. 3.0	0.0 400. 0.0	1.2 400. 1.2	411. 3.0		
394. 3.9					0.0 400. 0.0	1.2 400. 1.2	411. 3.0		

LINE 21

DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY	DATE SRVY
710610 10	710901 11	711007 12	711215 13	720104 14	720209 15	720417 17	720609 18		
113. 14.1	113. 14.2	14.7 113. 14.7	14.7 100. 14.6	100. 14.6	100. 14.5	100. 14.5	112. 15.1		
125. 7.8	134. 6.3	8.7 130. 7.2	110. 17.7	109. 16.7	109. 16.7	111. 16.9	131. 5.3		
150. 5.1	164. 4.3	5.6 155. 4.9	136. 6.2	140. 5.7	140. 5.7	126. 5.7	174. 5.2		
175. 4.3	184. 4.6	4.3 173. 5.9	161. 4.6	165. 4.9	165. 4.9	175. 5.4	200. 5.9		
200. 4.8	200. 4.0	5.1 200. 4.5	212. 5.4	200. 5.1	200. 5.1	200. 5.1	250. 5.8		
225. 2.9	263. 5.6	2.8 250. 5.1	225. 5.1	225. 5.1	225. 5.1	225. 5.1	250. 6.0		
250. 2.8	275. 3.8	2.6 275. 3.4	250. 5.2	250. 5.1	250. 5.1	250. 5.1	275. 5.1		
275. 2.8	292. 2.7	5.3 292. 2.7	274. 5.1	275. 5.1	275. 5.1	275. 5.1	300. 3.7		
300. 1.1	300. 2.5	6.0 300. 2.5	313. 3.3	300. 3.3	300. 3.3	300. 3.3	325. 2.7		
325. 1.1	325. 1.5	5.7 313. 1.5	325. 2.2	325. 2.2	325. 2.2	325. 2.2	350. 1.6		
350. 2.7	350. 1.1	3.3 350. 1.1	350. 1.9	350. 1.9	350. 1.9	400. 1.9	375. 1.9		
375. 2.7	375. 2.7	1.5 384. 1.5	375. 1.8	375. 1.8	375. 1.8	425. 1.2	400. 2.4		
394. 3.9	394. 3.9	2.6 400. 2.6	400. 3.0	400. 3.0	400. 3.0	450. 3.1	411. 3.0		
		3.7 400. 3.7				475. 3.1			

LINE 21

DATE 720075 SRVY 19	DATE 72005 SRVY 20	DATE 720929 SRVY 21	DATE 721211 SRVY 22	DATE 730116 SRVY 23	DATE 730215 SRVY 24	DATE 730316 SRVY 25	DATE 730329 SRVY 26
113. 10.4	15.3	113. 15.1	113. 15.0	113. 15.0	113. 14.8	113. 14.8	113. 14.5
139. 7.7	123. 9.6	140. 8.6	140. 8.6	140. 7.2	121. 10.0	134. 6.6	120. 10.6
160. 5.5	141. 6.0	139. 6.1	140. 5.4	150. 5.2	134. 6.9	159. 5.2	141. 5.9
182. 4.8	170. 5.0	157. 5.3	170. 5.8	200. 5.7	150. 5.5	187. 5.7	168. 5.4
183. 5.5	200. 5.9	183. 5.5	225. 5.9	225. 6.0	174. 5.6	200. 5.9	185. 5.6
200. 5.7	225. 6.0	200. 5.6	250. 6.4	250. 6.5	200. 6.0	225. 6.3	200. 5.9
225. 5.6	250. 6.0	225. 5.5	275. 6.6	275. 6.3	225. 6.4	250. 6.5	225. 6.6
250. 6.1	275. 5.0	250. 5.9	300. 5.2	300. 4.7	250. 6.4	275. 5.9	250. 6.8
275. 4.6	299. 5.3	275. 5.6	300. 3.3	325. 4.7	262. 6.4	300. 5.0	275. 6.4
300. 3.0	325. 6.4	300. 6.5	350. 2.6	350. 3.2	275. 5.6	325. 4.3	300. 4.7
325. 2.0	350. 1.3	307. 9.4	375. 1.9	375. 1.9	300. 3.9	350. 2.9	325. 3.2
350. 1.1	375. 1.1	325. 6.4	400. 1.1	400. 1.6	325. 2.0	375. 1.3	350. 2.0
375. 1.5	400. 1.1	375. 2.1	425. 2.8	425. 2.3	375. 1.2	400. 1.6	375. 1.5
400. 1.1	400. 1.1	400. 1.1	450. 4.5	450. 3.2	400. 1.1	425. 1.2	400. 1.5
425. 1.1	425. 1.1	425. 2.4			417. 4.1	425. 1.2	425. 1.5
430. 3.2					444. 4.4	425. 2.5	425. 2.6

LINE 21

DATE 730416 SRVY 27	DATE 730615 SRVY 28	DATE 730713 SRVY 29	DATE 730810 SRVY 30	DATE 731009 SRVY 31	DATE 731206 SRVY 32	DATE 740108 SRVY 33	DATE 740205 SRVY 34
113. 10.4	14.0	113. 14.2	113. 14.1	113. 13.8	113. 14.0	113. 14.0	113. 14.2
138. 6.6	17.6	134. 7.3	134. 6.2	129. 7.9	133. 7.9	124. 6.3	130. 8.4
160. 5.9	183. 6.0	163. 16.4	163. 5.7	150. 6.0	139. 5.7	152. 5.6	140. 6.3
182. 4.8	200. 5.9	189. 5.6	200. 5.8	200. 5.8	205. 5.6	200. 6.0	200. 5.6
200. 5.7	225. 6.1	200. 5.6	225. 6.2	225. 5.9	225. 6.0	231. 6.4	200. 5.9
225. 5.6	250. 6.1	200. 6.0	250. 5.9	250. 5.9	250. 6.5	250. 6.4	225. 6.4
250. 6.1	275. 5.8	275. 5.8	275. 5.8	275. 6.2	275. 6.5	275. 6.3	275. 6.4
300. 5.0	300. 5.5	300. 5.7	300. 6.8	300. 4.5	300. 5.5	300. 5.2	300. 5.7
325. 3.3	325. 5.3	325. 4.3	325. 5.8	325. 2.7	325. 4.7	325. 4.2	325. 4.2
350. 1.6	350. 3.0	350. 2.2	350. 5.8	350. 1.9	350. 2.8	350. 3.2	350. 4.3
400. 1.4	375. 1.5	375. 1.9	375. 1.3	375. 1.6	375. 1.6	375. 1.9	375. 3.5
425. 1.4	400. 1.1	400. 1.7	400. 1.5	400. 1.9	400. 1.3	400. 1.3	400. 1.7
425. 3.3	425. 3.3	425. 4.1	400. 3.5	425. 3.3	425. 2.2	425. 2.5	425. 2.6
					444. 4.4	425. 4.5	425. 3.5



LINE 21

DATE 740305 SRVY 35	DATE 740402 SRVY 36	DATE 740531 SRVY 37	DATE 740816 SRVY 38	DATE 741001 SRVY 39	DATE 741205 SRVY 40
113. 14.1	113. 14.1	113. 14.4	100. 17.1	100. 17.2	100. 17.3
131. 6.6	130. 5.7	177. 5.8	107. 17.8	107. 17.6	106. 17.6
200. 5.8	195. 6.0	200. 6.0	125. 11.4	125. 10.4	125. 10.4
225. 6.0	200. 5.8	225. 6.0	150. 6.8	100. 10.0	100. 10.0
250. 6.4	225. 6.0	225. 6.3	175. 5.8	7.0 16.0	6.0 6.0
275. 6.3	225. 6.0	250. 6.3	200. 5.8	6.0 18.0	6.0 18.0
300. 6.0	250. 6.3	275. 6.3	5.9 17.5	5.9 20.0	5.9 20.0
325. 4.5	300. 6.0	300. 5.8	6.1 20.0	5.8 22.5	6.0 22.5
350. 4.2	325. 5.0	325. 5.2	6.4 22.5	6.0 25.0	6.1 25.0
375. 3.4	350. 4.9	350. 5.3	5.6 25.0	6.4 27.5	6.3 27.5
400. 2.3	366. 5.0	400. 4.0	3.00 5.2	6.4 30.0	6.3 30.0
425. 2.4	400. 2.4	425. 2.6	3.75 4.7	5.1 32.5	5.4 32.5
450. 2.0	425. 1.4	450. 1.9	4.00 4.9	5.1 35.0	5.4 35.0
	450. 3.5	470. 4.6	4.00 4.9	5.1 37.5	5.4 37.5
		470. 4.6	4.25 2.1	5.1 40.0	5.4 40.0
		470. 4.6	4.25 2.1	5.1 42.5	5.4 42.5
		470. 4.6	4.25 2.1	5.1 45.0	5.4 45.0
		470. 4.6	4.25 2.1	5.1 47.5	5.4 47.5
		470. 4.6	4.25 2.1	5.1 50.0	5.4 50.0
		470. 4.6	4.25 2.1	5.1 52.5	5.4 52.5
		470. 4.6	4.25 2.1	5.1 55.0	5.4 55.0
		470. 4.6	4.25 2.1	5.1 57.5	5.4 57.5
		470. 4.6	4.25 2.1	5.1 60.0	5.4 60.0
		470. 4.6	4.25 2.1	5.1 62.5	5.4 62.5
		470. 4.6	4.25 2.1	5.1 65.0	5.4 65.0
		470. 4.6	4.25 2.1	5.1 67.5	5.4 67.5
		470. 4.6	4.25 2.1	5.1 70.0	5.4 70.0
		470. 4.6	4.25 2.1	5.1 72.5	5.4 72.5
		470. 4.6	4.25 2.1	5.1 75.0	5.4 75.0
		470. 4.6	4.25 2.1	5.1 77.5	5.4 77.5
		470. 4.6	4.25 2.1	5.1 80.0	5.4 80.0
		470. 4.6	4.25 2.1	5.1 82.5	5.4 82.5
		470. 4.6	4.25 2.1	5.1 85.0	5.4 85.0
		470. 4.6	4.25 2.1	5.1 87.5	5.4 87.5
		470. 4.6	4.25 2.1	5.1 90.0	5.4 90.0
		470. 4.6	4.25 2.1	5.1 92.5	5.4 92.5
		470. 4.6	4.25 2.1	5.1 95.0	5.4 95.0
		470. 4.6	4.25 2.1	5.1 97.5	5.4 97.5
		470. 4.6	4.25 2.1	5.1 100.0	5.4 100.0



APPENDIX C

CHANGE IN MSL SHORELINE POSITION



This appendix shows the distance from the backbeach datum to the MSL shoreline intercept relative to its position on the date of the first beach profile survey (12-18 Nov. 1970). The occurrences of identified storms and times of beach profile surveys throughout the study period are also provided.

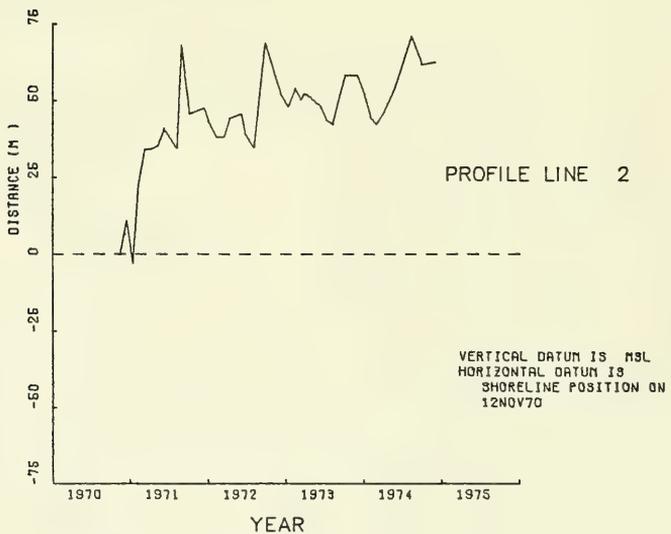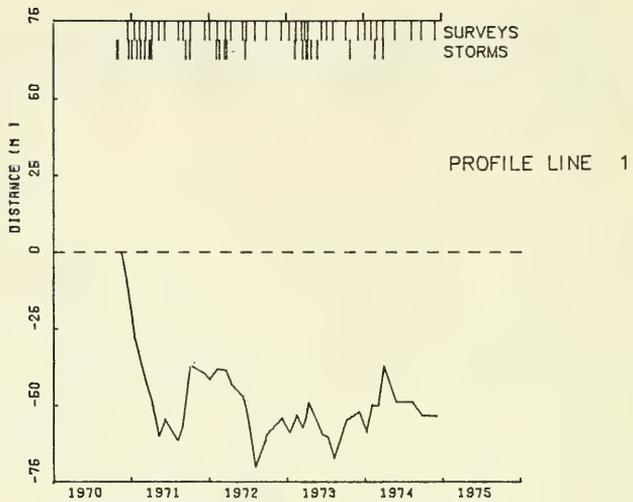



CHANGE IN DISTANCE TO SHORE LINE

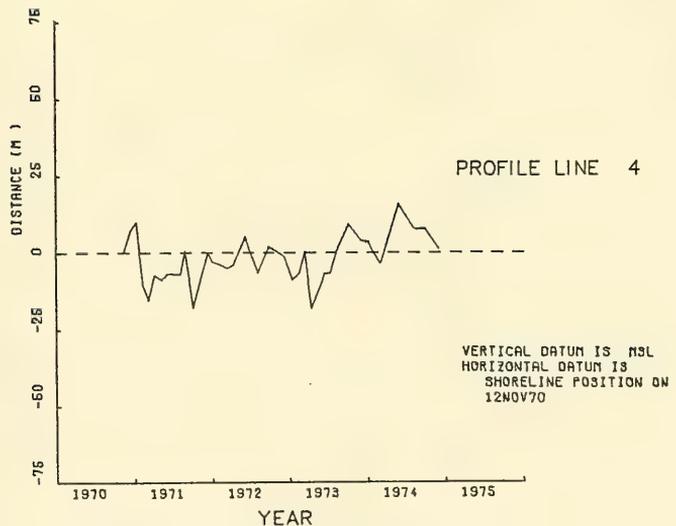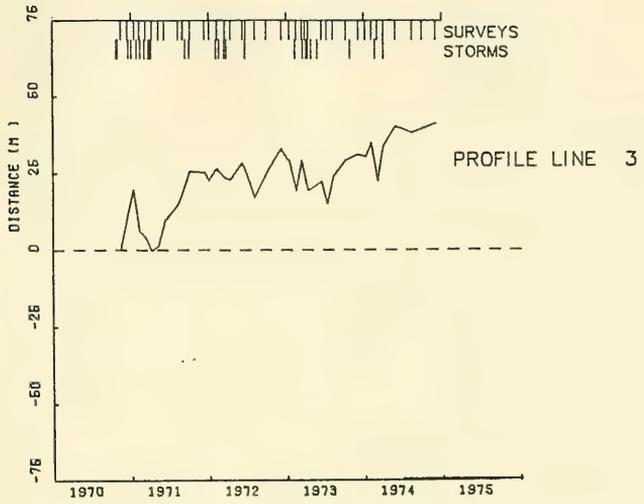



CHANGE IN DISTANCE TO SHORE LINE

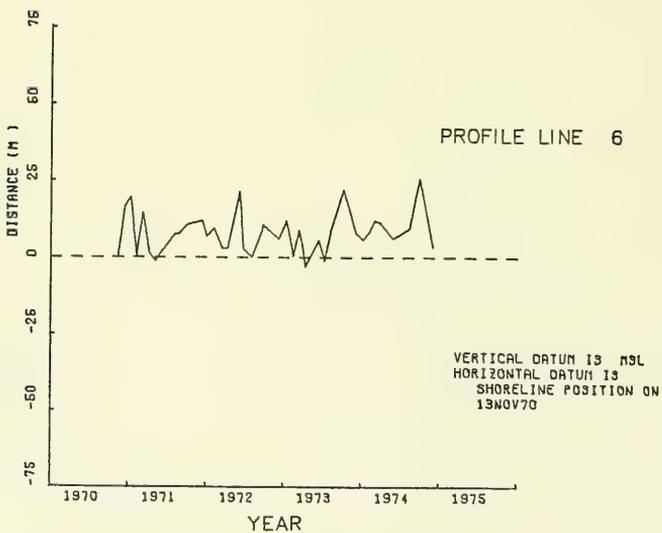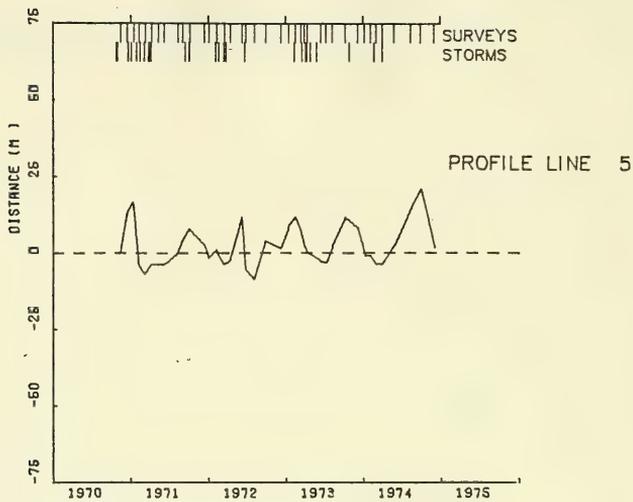



CHANGE IN DISTANCE TO SHORE LINE

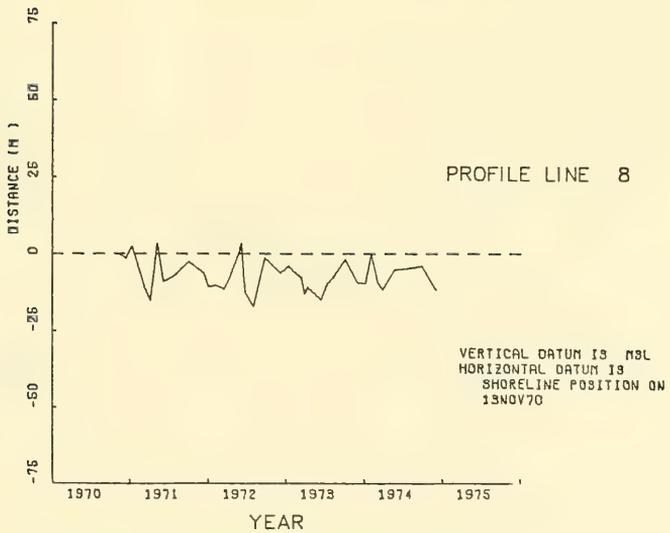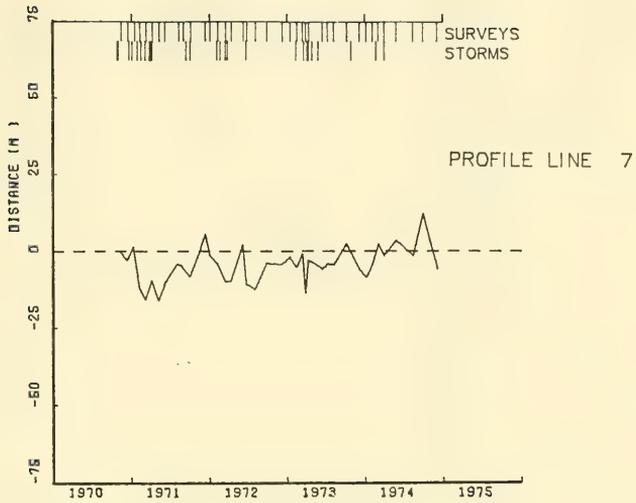



CHANGE IN DISTANCE TO SHORE LINE

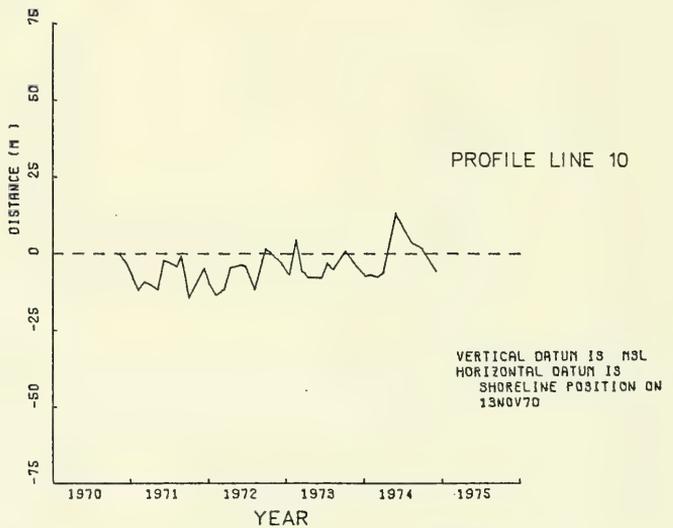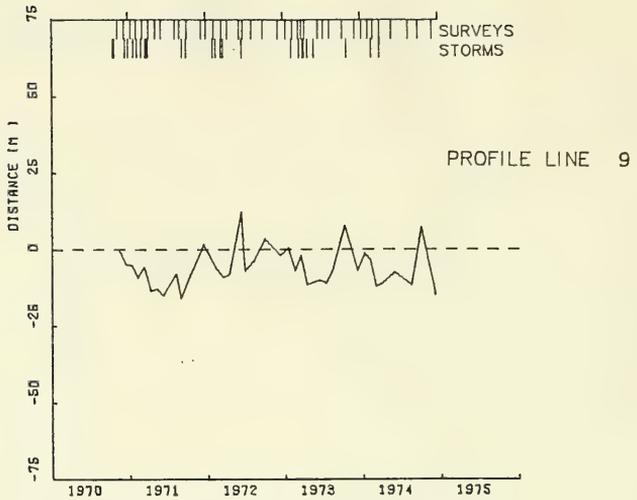



CHANGE IN DISTANCE TO SHORE LINE

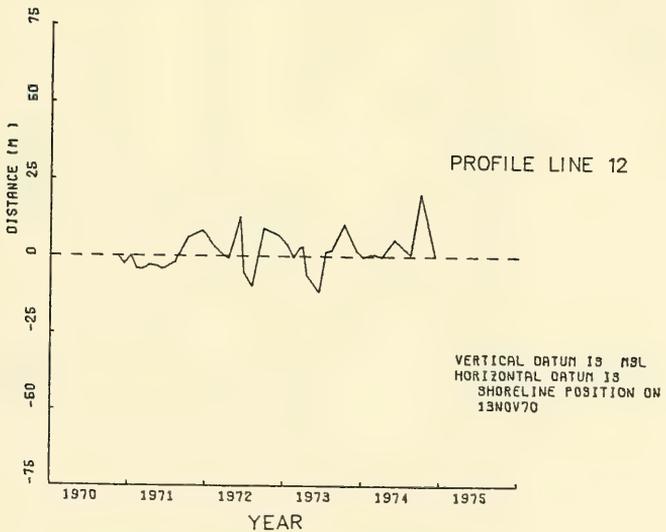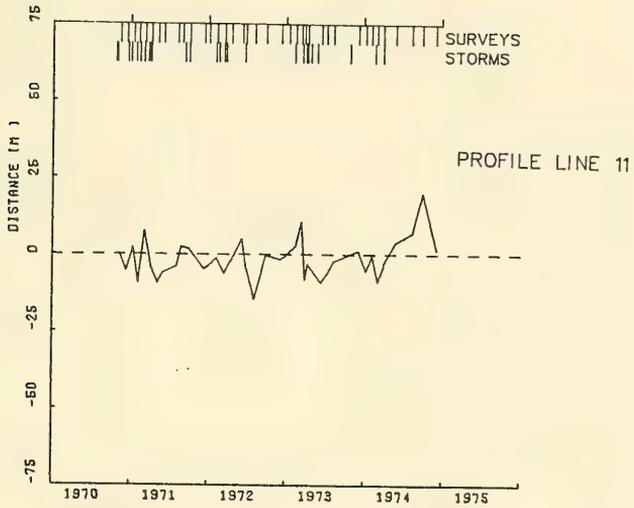



CHANGE IN DISTANCE TO SHORE LINE

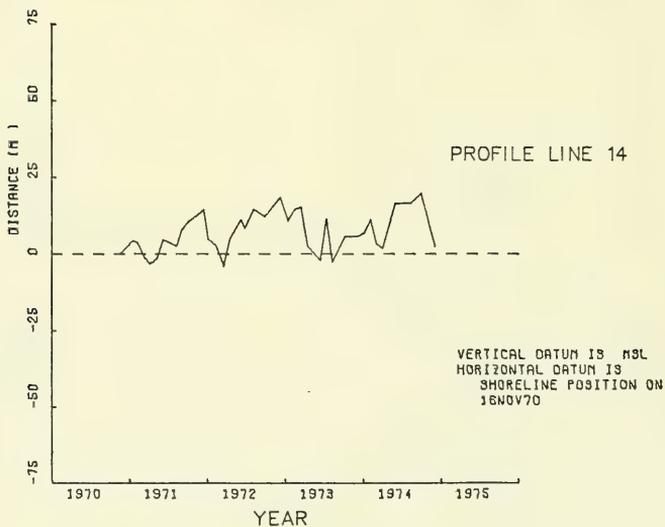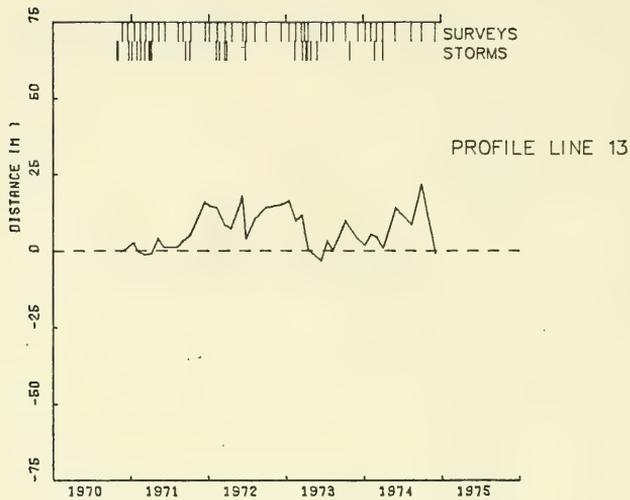



CHANGE IN DISTANCE TO SHORE LINE

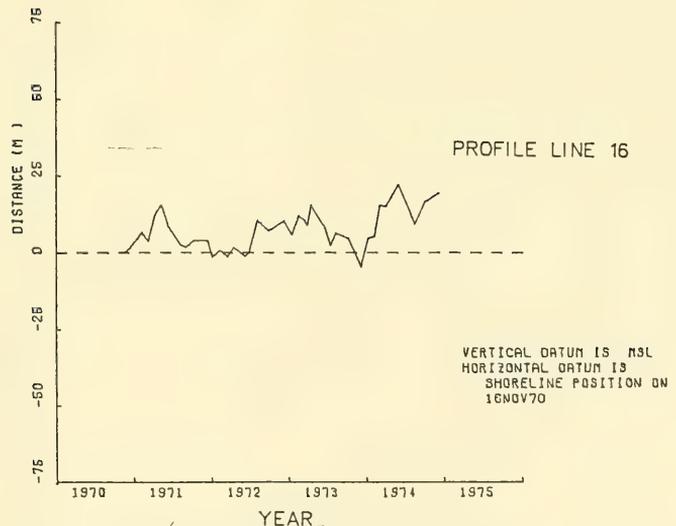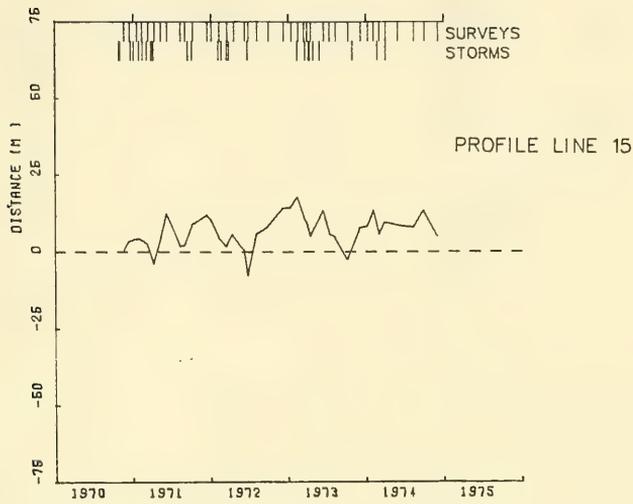


CHANGE IN DISTANCE TO SHORE LINE

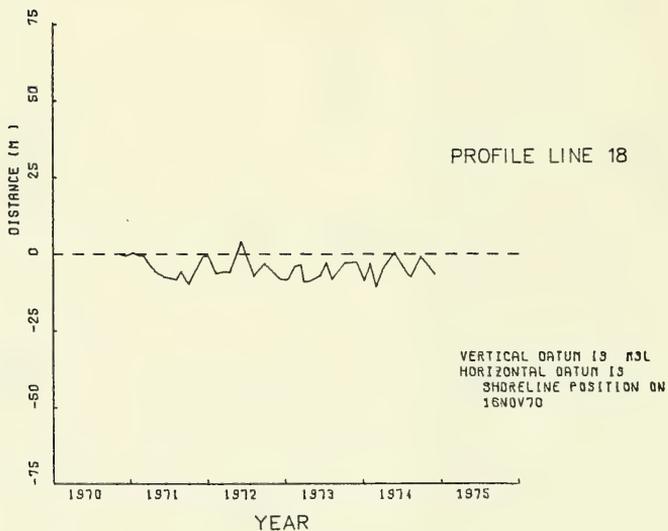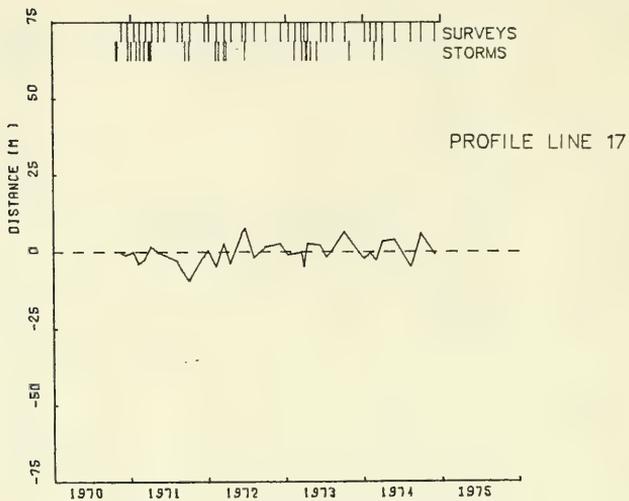

CHANGE IN DISTANCE TO SHORE LINE

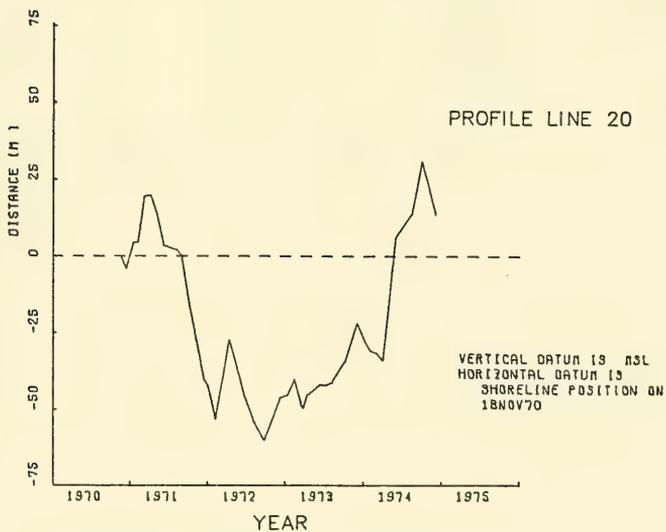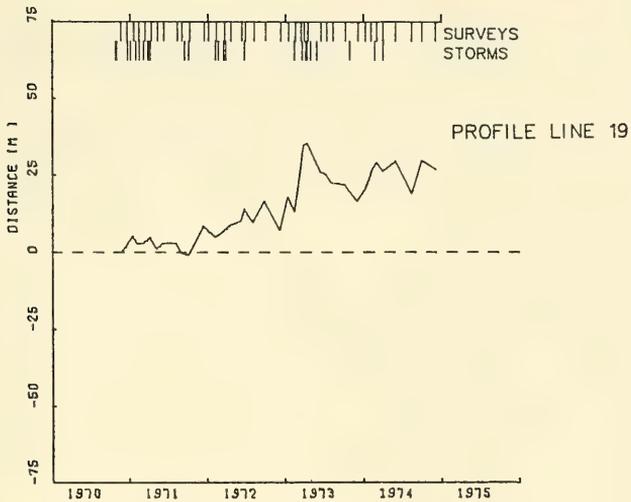



CHANGE IN DISTANCE TO SHORE LINE

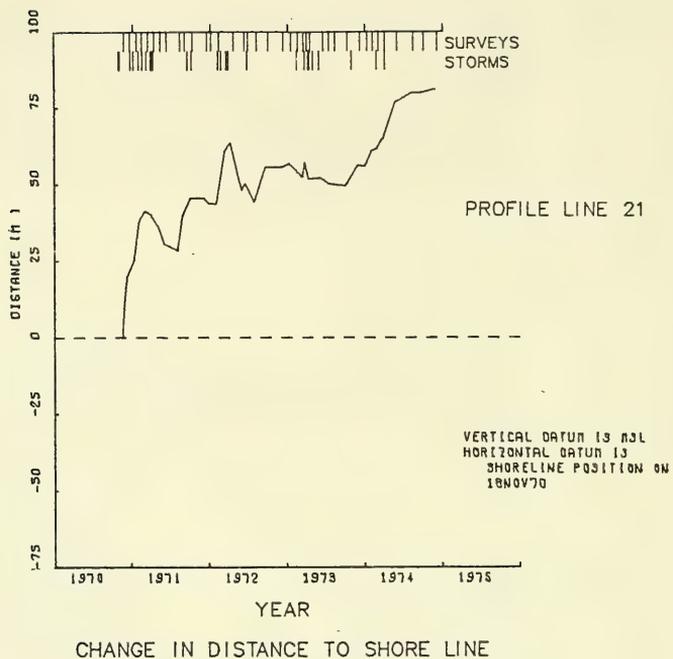



APPENDIX D

CHANGE IN ABOVE MSL UNIT VOLUME



The unit volume is the volume per unit width (cubic meters per meter) bounded by a horizontal line passing through the MSL position, a vertical line at the backbeach datum and the measured beach profile. This appendix shows the above MSL volume at successive beach profile measurements relative to the long-term mean above MSL unit volume. The time of beach profile measurements and occurrences of identified storms is also provided.

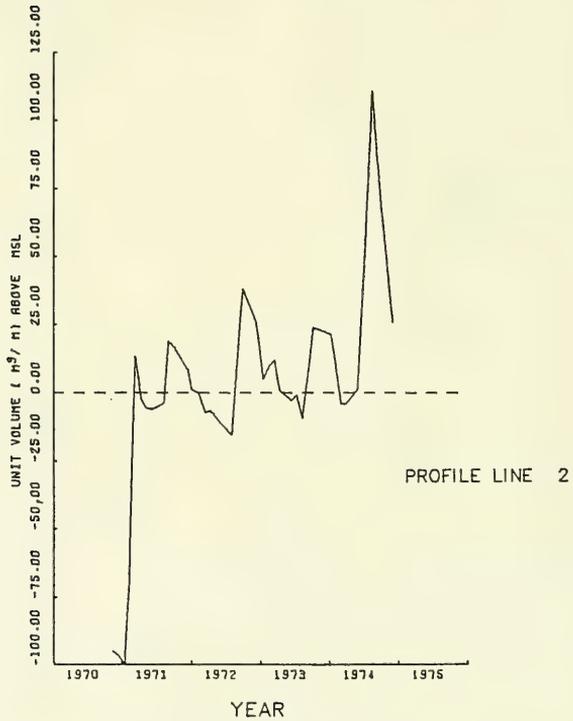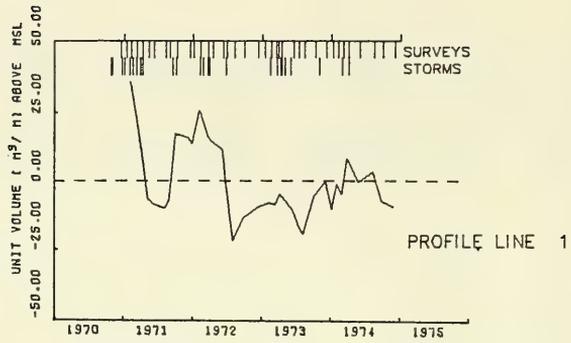



UNIT VOLUME CHANGES

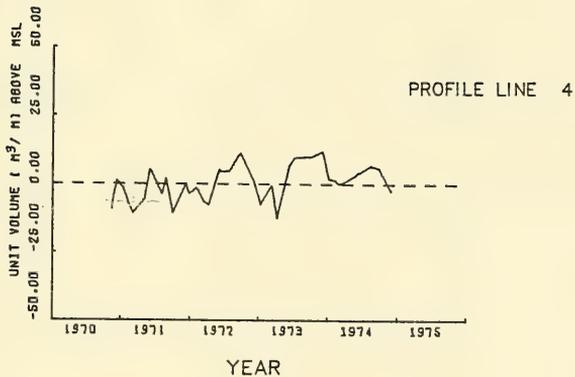
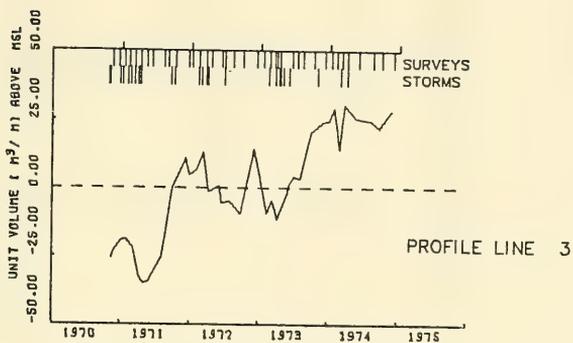


UNIT VOLUME CHANGES

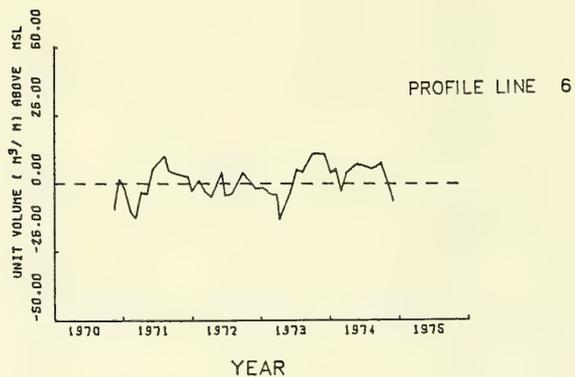
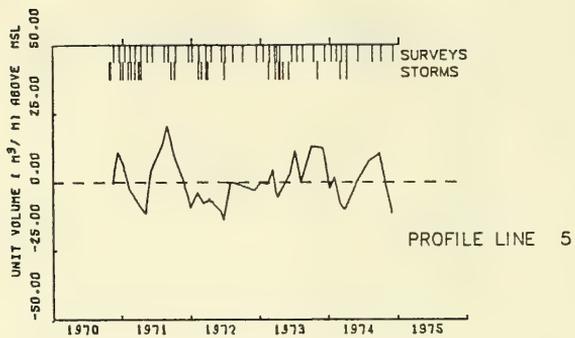


UNIT VOLUME CHANGES

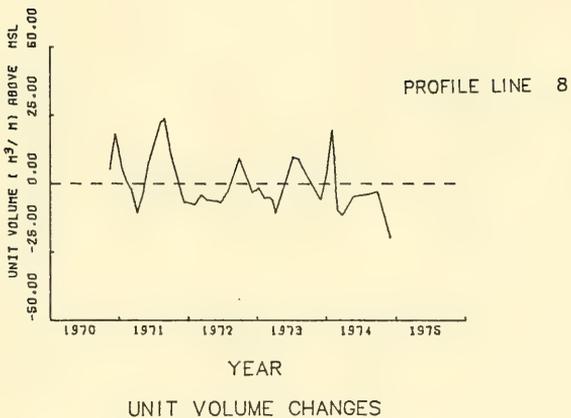
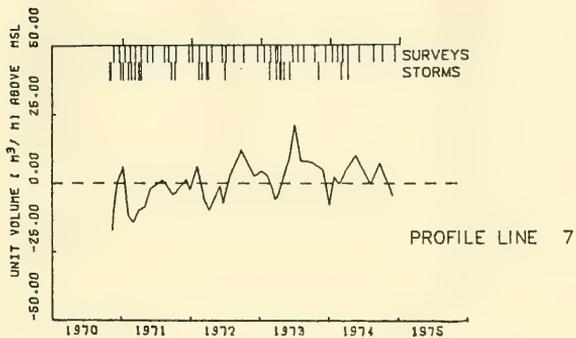


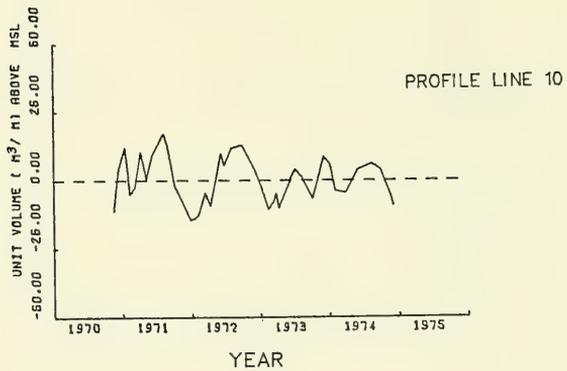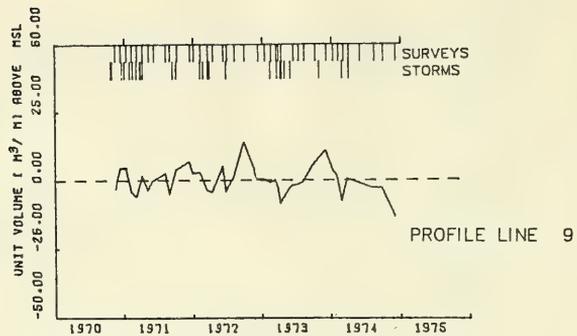



UNIT VOLUME CHANGES

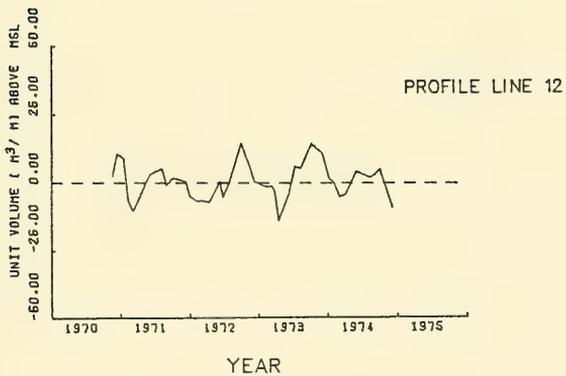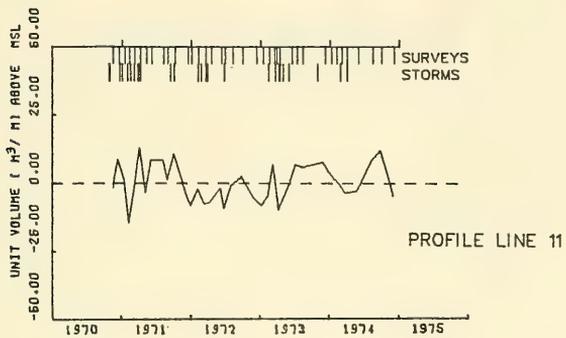



UNIT VOLUME CHANGES

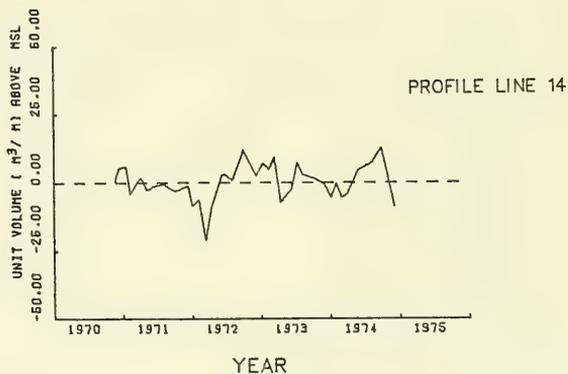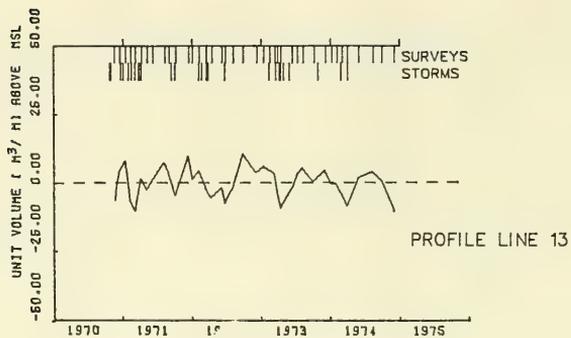



UNIT VOLUME CHANGES

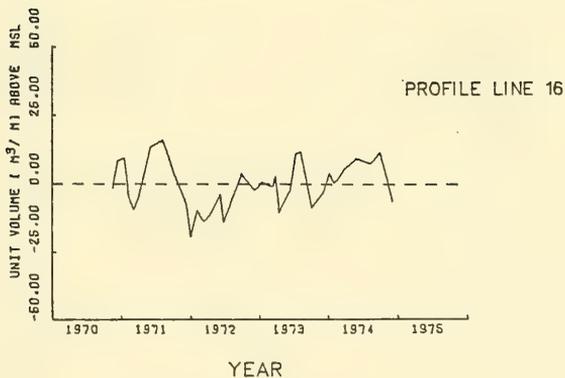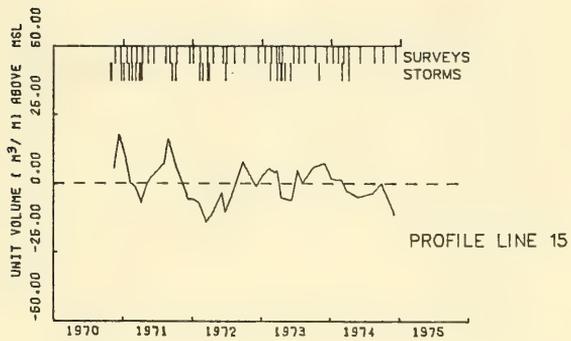


UNIT VOLUME CHANGES

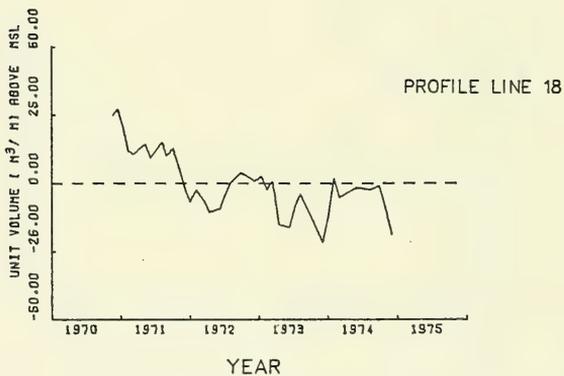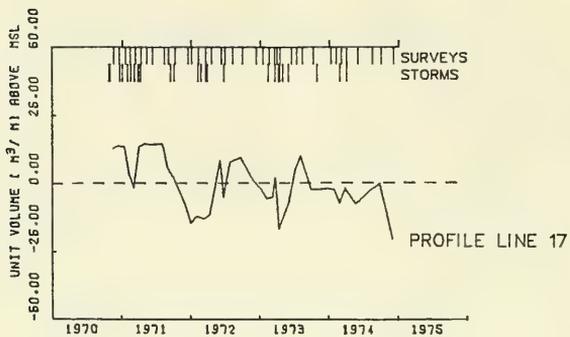

UNIT VOLUME CHANGES

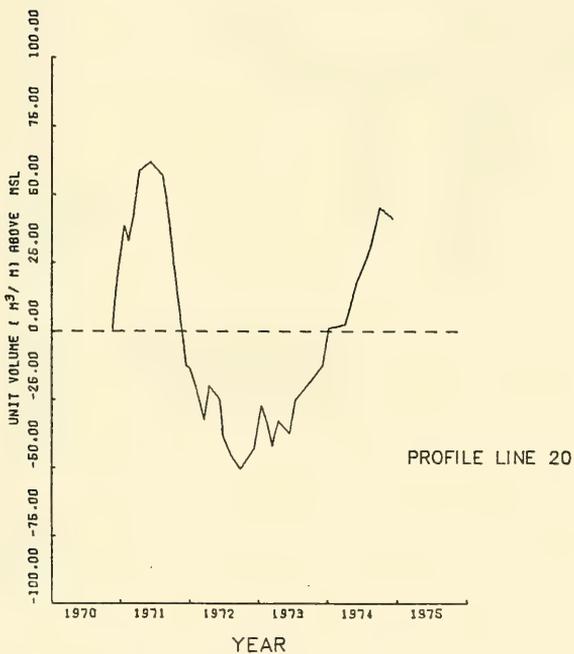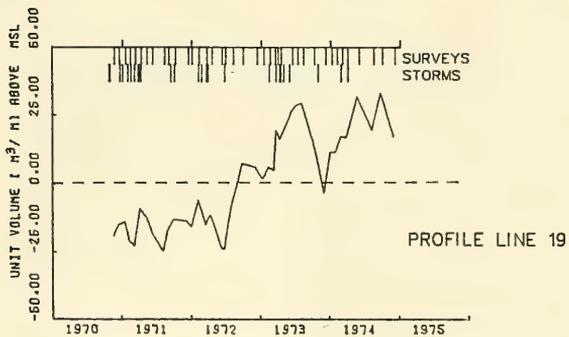

UNIT VOLUME CHANGES

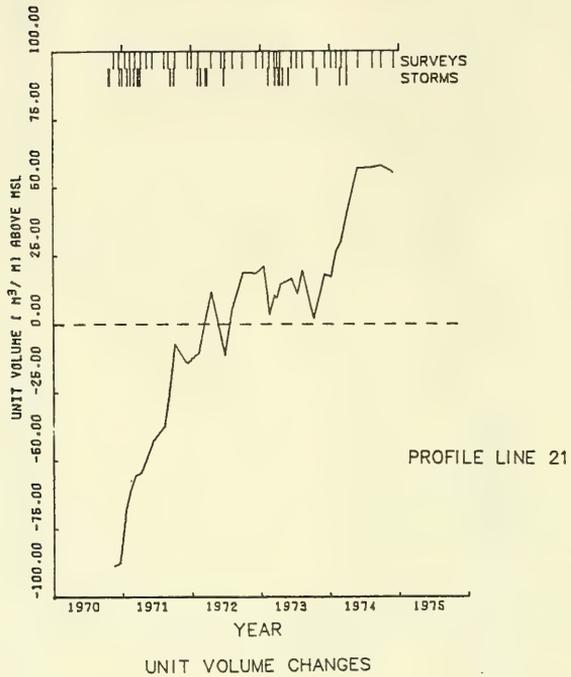


APPENDIX E


PROFILE ENVELOPES

This appendix provides the position of the maximum and minimum sand elevations along the profile line during the study period relative to the National Geodetic Vertical Datum of 1929. Horizontal positions are measured from the MSL shoreline intercept on the first survey of the study (12-18 Nov. 1970).

VERTICAL DATUM IS MSL
HORIZONTAL DATUM IS
SHORELINE POSITION ON
12NOV70

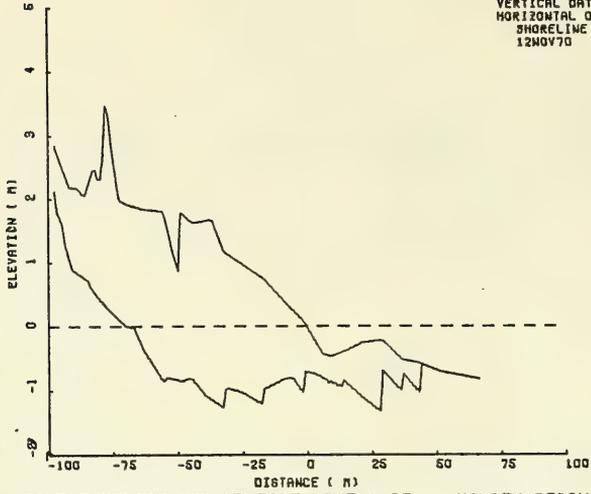


PROFILE ENVELOPE FOR PROFILE LINE 1 AT HOLDEN BEACH, NC
12NOV70 - 3DEC74

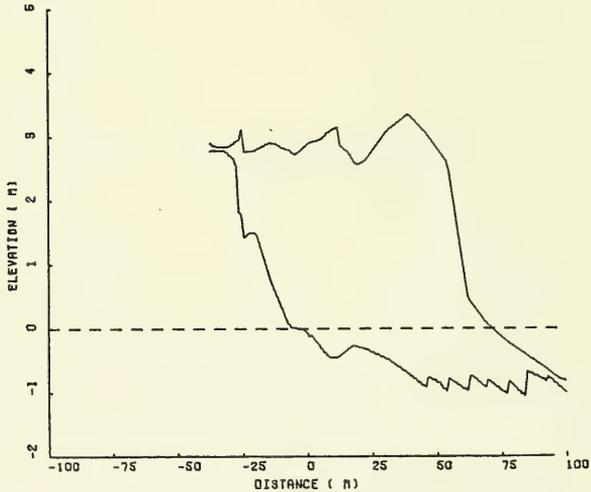


PROFILE ENVELOPE FOR PROFILE LINE 2 AT HOLDEN BEACH, NC
12NOV70 - 3DEC74

VERTICAL DATUM IS MSL
HORIZONTAL DATUM IS
SHORELINE POSITION ON
12NOV70

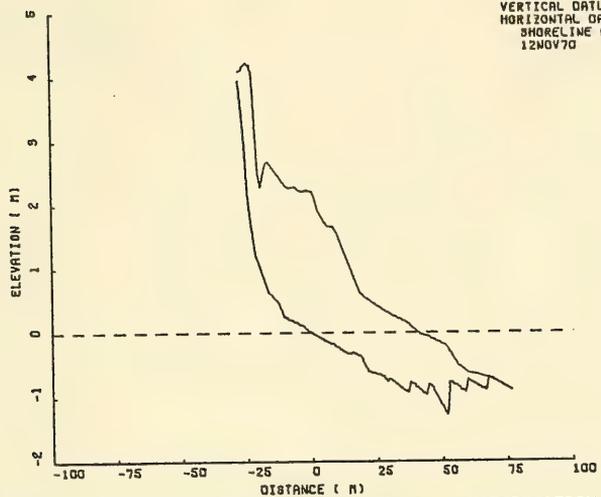


PROFILE ENVELOPE FOR PROFILE LINE 3 AT HOLDEN BEACH, NC
12NOV70 - 30DEC74

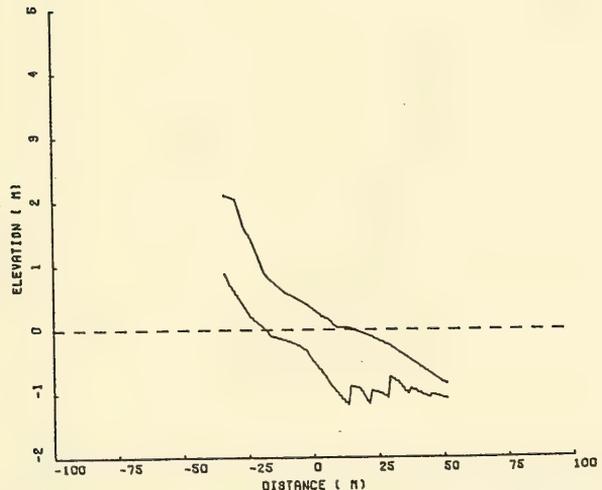


PROFILE ENVELOPE FOR PROFILE LINE 4 AT HOLDEN BEACH, NC
13NOV70 - 30DEC74


VERTICAL DATUM IS MSL
HORIZONTAL DATUM IS
SHORELINE POSITION ON
13NOV70

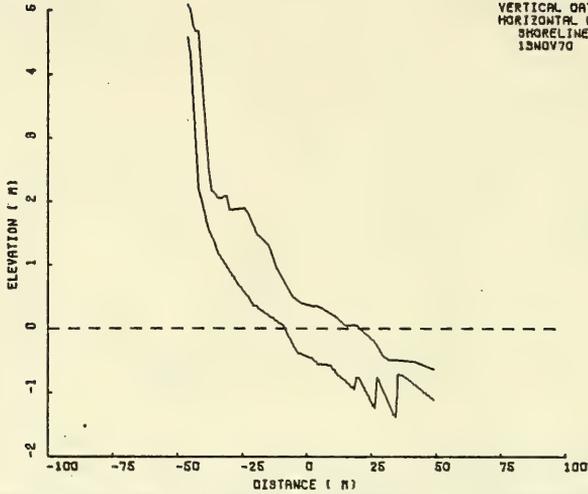


PROFILE ENVELOPE FOR PROFILE LINE 5 AT HOLDEN BEACH, NC
13NOV70 - 30DEC74

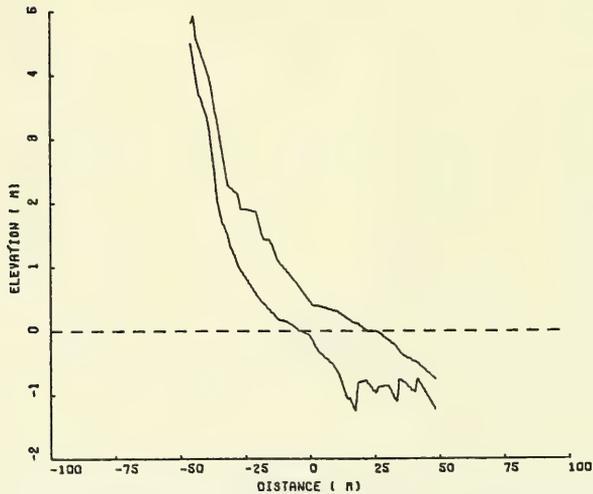

PROFILE ENVELOPE FOR PROFILE LINE 6 AT HOLDEN BEACH, NC
13NOV70 - 30DEC74

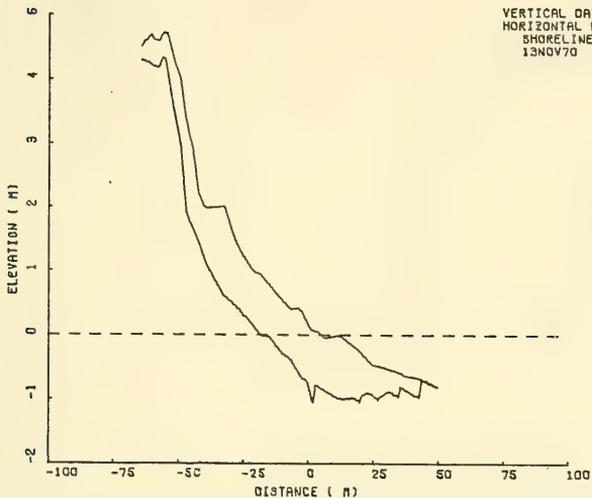


PROFILE ENVELOPE FOR PROFILE LINE 7 AT HOLDEN BEACH, NC
13NOV70 - 4DEC74

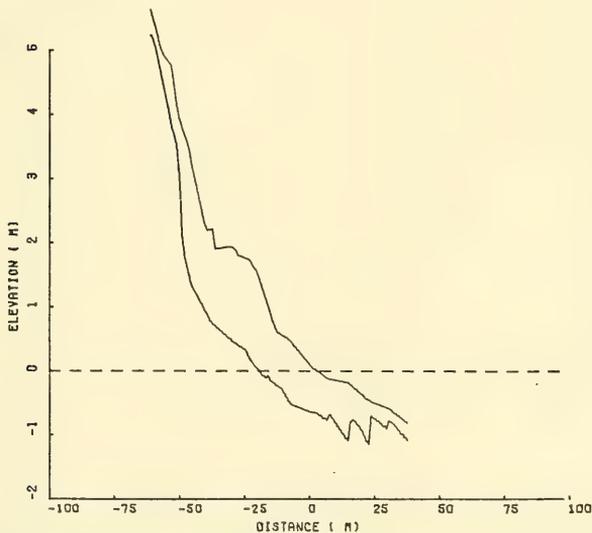


PROFILE ENVELOPE FOR PROFILE LINE 8 AT HOLDEN BEACH, NC
13NOV70 - 4DEC74


VERTICAL DATUM IS MSL
HORIZONTAL DATUM IS
SHORELINE POSITION ON
13NOV70

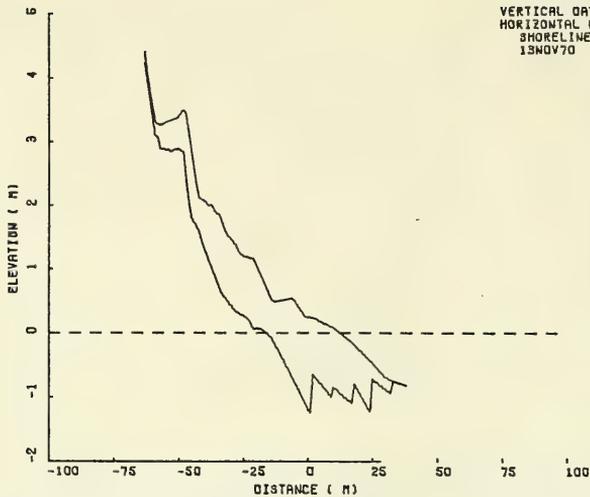


PROFILE ENVELOPE FOR PROFILE LINE 9 AT HOLDEN BEACH, NC
13NOV70 - 4DEC74

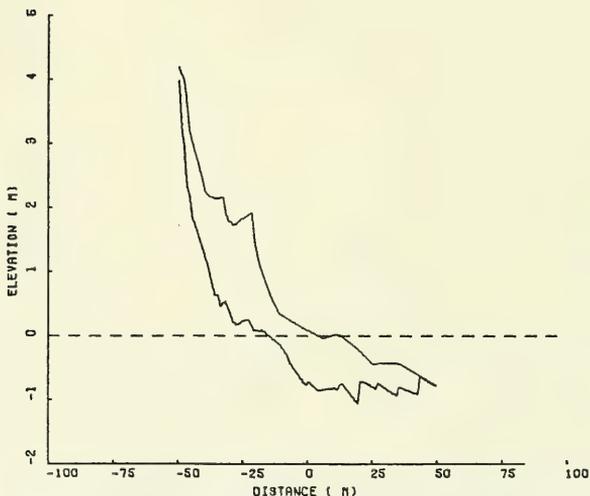


PROFILE ENVELOPE FOR PROFILE LINE 10 AT HOLDEN BEACH, NC
13NOV70 - 4DEC74

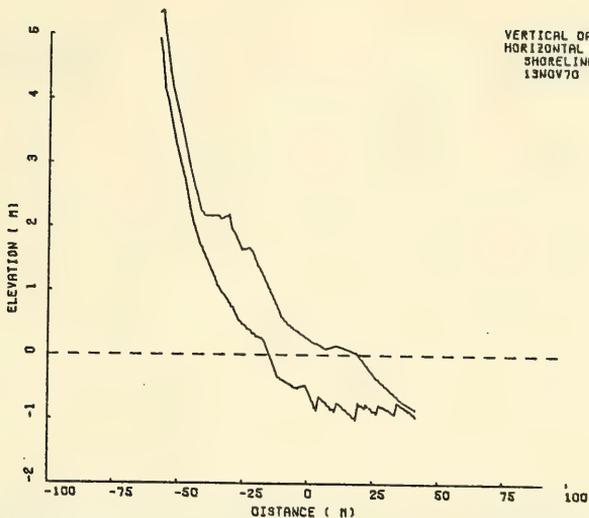

PROFILE ENVELOPE FOR PROFILE LINE 11 AT HOLDEN BEACH, NC
 13NOV70 - 4DEC74

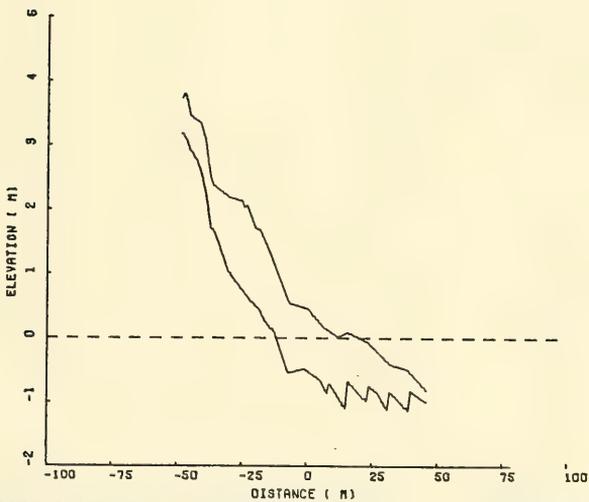


PROFILE ENVELOPE FOR PROFILE LINE 12 AT HOLDEN BEACH, NC
 16NOV70 - 4DEC74

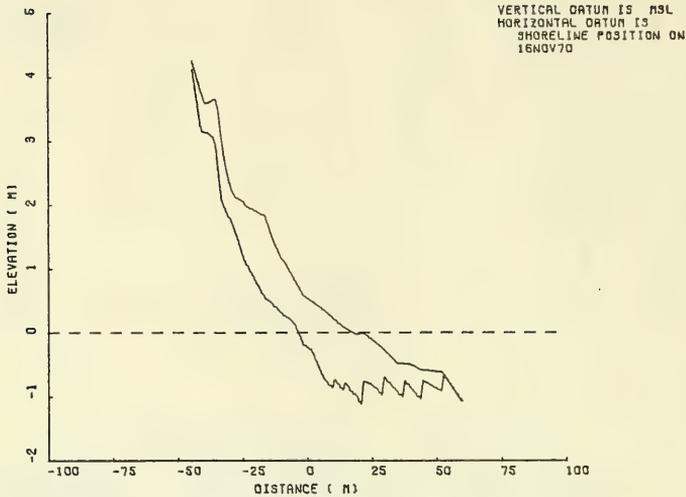


PROFILE ENVELOPE FOR PROFILE LINE 13 AT HOLDEN BEACH, NC
16NOV70 - 4DEC74




PROFILE ENVELOPE FOR PROFILE LINE 14 AT HOLDEN BEACH, NC
16NOV70 - 4DEC74

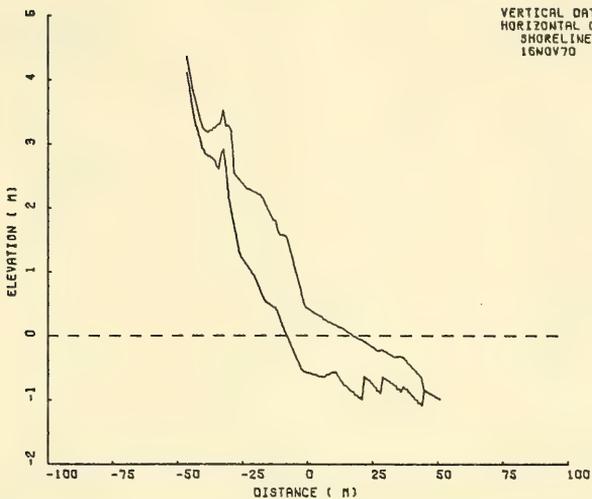


PROFILE ENVELOPE FOR PROFILE LINE 15 AT HOLDEN BEACH, NC
16NOV70 - 4DEC74

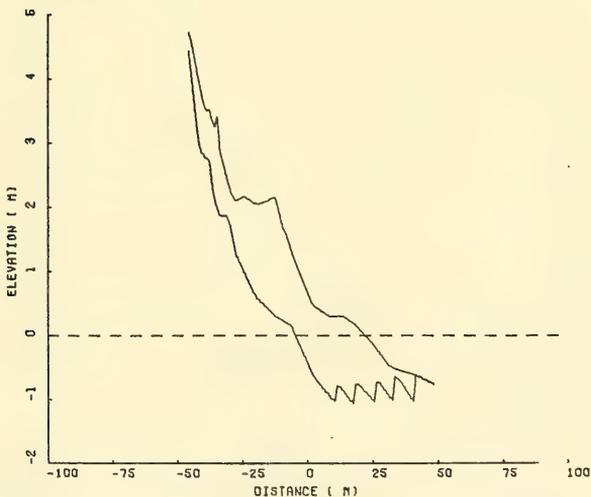


PROFILE ENVELOPE FOR PROFILE LINE 16 AT HOLDEN BEACH, NC
16NOV70 - 5DEC74

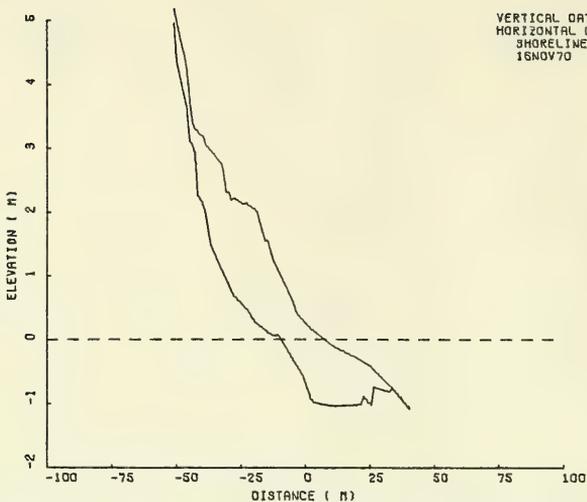


PROFILE ENVELOPE FOR PROFILE LINE 17 AT HOLDEN BEACH, NC
16NOV70 - 5DEC74

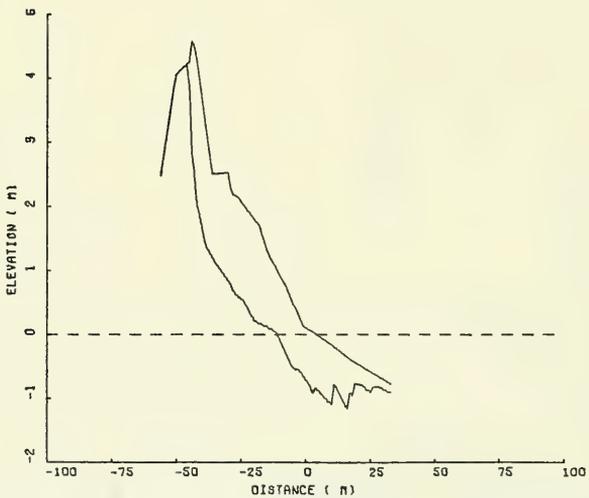


PROFILE ENVELOPE FOR PROFILE LINE 18 AT HOLDEN BEACH, NC
16NOV70 - 5DEC74

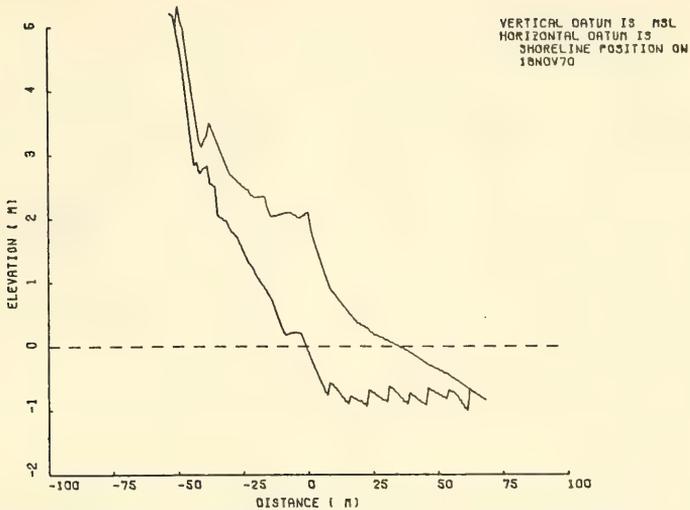

PROFILE ENVELOPE FOR PROFILE LINE 19 AT HOLDEN BEACH, NC
18NOV70 - 50EC74

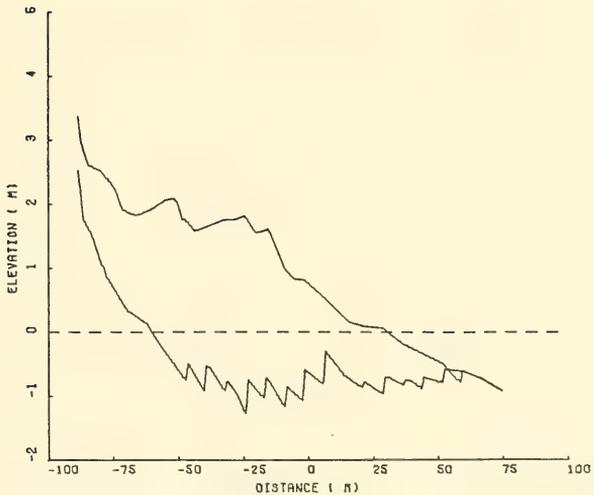

PROFILE ENVELOPE FOR PROFILE LINE 20 AT HOLDEN BEACH, NC
18NOV70 - 50EC74

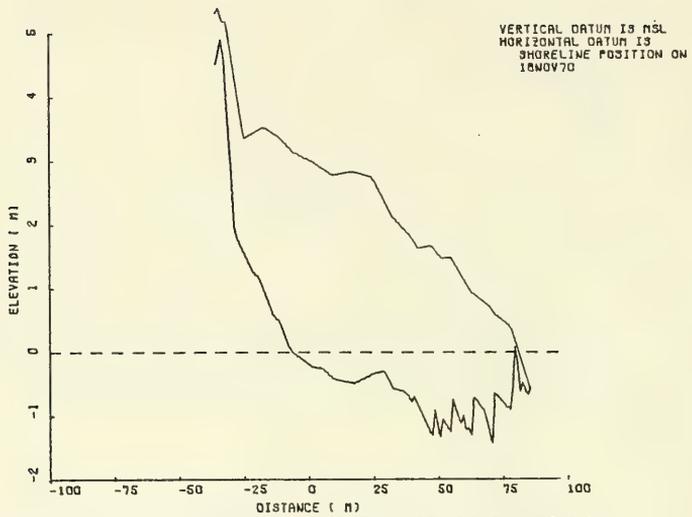

PROFILE ENVELOPE FOR PROFILE LINE 21 AT HOLDEN BEACH, NC
18NOV70 - S0EC74

<p>Miller, Martin C. Beach changes at Holden Beach, North Carolina, 1970-74 / by Martin C. Miller. --Fort Belvoir, Va. : U.S. Army, Corps of Engineers, Coastal Engineering Research Center ; Springfield, Va. : available from NTIS, 1963. [94] p. : ill. ; 29 cm.--(Miscellaneous report / Coastal Engineering Research Center ; no. 83-5) Cover title. "March 1983." Report provides basic engineering information on changes in the volume of sand on beaches above mean sea level, and on changes in shoreline position, as obtained from long-term beach survey projects. I. Beach changes. 2. Beach erosion control. 3. Beach profile surveys. 4. Holden Beach, North Carolina. 5. Storm erosion. I. Title. II. Coastal Engineering Research Center (U.S.). III. Series: Miscellaneous report (Coastal Engineering Research Center (U.S.)); no. 83-5.</p> <p>TC203 .U58lmr no. 83-5 627</p>	<p>Miller, Martin C. Beach changes at Holden Beach, North Carolina, 1970-74 / by Martin C. Miller. --Fort Belvoir, Va. : U.S. Army, Corps of Engineers, Coastal Engineering Research Center ; Springfield, Va. : available from NTIS, 1983. [94] p. : ill. ; 29 cm.--(Miscellaneous report / Coastal Engineering Research Center ; no. 83-5) Cover title. "March 1983." Report provides basic engineering information on changes in the volume of sand on beaches above mean sea level, and on changes in shoreline position, as obtained from long-term beach survey projects. I. Beach changes. 2. Beach erosion control. 3. Beach profile surveys. 4. Holden Beach, North Carolina. 5. Storm erosion. I. Title. II. Coastal Engineering Research Center (U.S.). III. Series: Miscellaneous report (Coastal Engineering Research Center (U.S.)); no. 83-5.</p> <p>TC203 .U58lmr no. 83-5 627</p>
<p>Miller, Martin C. Beach changes at Holden Beach, North Carolina, 1970-74 / by Martin C. Miller. --Fort Belvoir, Va. : U.S. Army, Corps of Engineers, Coastal Engineering Research Center ; Springfield, Va. : available from NTIS, 1963. [94] p. : ill. ; 29 cm.--(Miscellaneous report / Coastal Engineering Research Center ; no. 83-5) Cover title. "March 1983." Report provides basic engineering information on changes in the volume of sand on beaches above mean sea level, and on changes in shoreline position, as obtained from long-term beach survey projects. I. Beach changes. 2. Beach erosion control. 3. Beach profile surveys. 4. Holden Beach, North Carolina. 5. Storm erosion. I. Title. II. Coastal Engineering Research Center (U.S.). III. Series: Miscellaneous report (Coastal Engineering Research Center (U.S.)); no. 83-5.</p> <p>TC203 .U58lmr no. 83-5 627</p>	<p>Miller, Martin C. Beach changes at Holden Beach, North Carolina, 1970-74 / by Martin C. Miller. --Fort Belvoir, Va. : U.S. Army, Corps of Engineers, Coastal Engineering Research Center ; Springfield, Va. : available from NTIS, 1983. [94] p. : ill. ; 29 cm.--(Miscellaneous report / Coastal Engineering Research Center ; no. 83-5) Cover title. "March 1983." Report provides basic engineering information on changes in the volume of sand on beaches above mean sea level, and on changes in shoreline position, as obtained from long-term beach survey projects. I. Beach changes. 2. Beach erosion control. 3. Beach profile surveys. 4. Holden Beach, North Carolina. 5. Storm erosion. I. Title. II. Coastal Engineering Research Center (U.S.). III. Series: Miscellaneous report (Coastal Engineering Research Center (U.S.)); no. 83-5.</p> <p>TC203 .U58lmr no. 83-5 627</p>



